



XD-9005B
EL-SWD-HC
06/06/2013

Simple. Smart.



XLT Electric Oven & AVI Hood Installation & Operation Manual



CAUTION

This appliance is for professional use by qualified personnel. This appliance must be installed by qualified persons in accordance with the regulations in force. This appliance must be installed with sufficient ventilation to prevent the occurrence of unacceptable concentrations of substances harmful to health in the room in which it is installed. This appliance needs an unobstructed flow of fresh air for satisfactory operation & must be installed in a suitably ventilated room in accordance with current regulations. This appliance should be serviced by qualified personnel at least every 12 months or sooner if heavy use is expected.

Current versions of this manual, Rough-In Specifications, Parts & Service Manual, Architectural Drawings, & a list of International Authorized Distributors are available at: www.xltovens.com

For use with the following XLT Electric Oven Versions:

Standard (S) D
World (W) D

For use with the following AVI Electric Hood Versions:

Standard (S) C
World (W) C



XLT Ovens
PO Box 9090
Wichita, Kansas 67277

US: 888-443-2751 FAX: 316-943-2769 INTL: 316-943-2751 WEB: www.xltovens.com



SAFETY DEPENDS ON YOU



DANGER

Improper installation, adjustment, alteration, service or maintenance can cause property damage, injury, or death. Read the installation, operating and maintenance instructions thoroughly before installing, using, or servicing this

- Post in a prominent location instructions to be followed in the event you smell gas. This information can be obtained by consulting your local gas supplier.



DANGER

FOR YOUR SAFETY

Do not store or use gasoline or other flammable liquids or vapors in the vicinity of this or any other appliance.

- In the event a gas odor is detected, shut off the gas at the main shutoff valve immediately. Contact your local Gas Company or supplier.
- Do not restrict the flow of combustion and/or ventilation air to the unit. Provide adequate clearance for operating, cleaning, maintaining the unit & adequate clearance for operating the gas shutoff valve when the unit is in the installed position.
- Keep the area free & clear of combustible material. DO NOT SPRAY AEROSOLS IN THE VICINITY OF THIS APPLIANCE WHILE IT IS IN OPERATION.
- Ovens are certified for installation on combustible floors.
- Electrical schematics are located inside the control box of the oven & in this manual. Disconnect input power to the unit before performing any maintenance.
- This unit requires a ventilation hood. The installation must conform to local codes.
- This unit may be operated with either natural gas or liquid petroleum fuel as designated on the nameplate label located on the side of the unit.
- This unit must be operated by the same voltage, phase, & frequency of electrical power as designated on the nameplate label located on the side of the unit.
- Minimum clearances must be maintained from combustible & non-combustible construction materials.
- Follow all local codes when installing this unit.
- Follow all local codes to electrically ground the unit.
- Appliance is not to be cleaned with high pressure water.
- XLT ovens are certified for use in stacks of up to three (3) units of XLT products. Integration of other manufacturer's products into an oven stack is not recommended, & voids any warranties. XLT Ovens assumes no liability for mixed product applications.
- Failure to call XLT Customer Service at 1-888-443-2751 prior to contacting a repair company voids any & all warranties.

XLT Ovens has spent millions of dollars designing and testing our products as well as developing Installation & Operation Manuals. These manuals are the most complete and easiest to understand in the industry. However, they are worthless if they are not followed.

We have witnessed store operators and building owners lose many thousands of dollars in lost revenue due to incorrect installations. We highly recommend you follow all instructions given in this manual as well as follow best practices in plumbing, electrical, and HVAC building codes.

Definitions & Symbols

A safety instruction (message) includes a “Safety Alert Symbol” & a signal word or phrase such as **DANGER**, **WARNING** or **CAUTION**. Each signal word has the following meaning:



DANGER

Indicates a potentially hazardous situation that, if not avoided, can result in serious injury or death.



**HIGH
VOLTAGE**

This symbol indicates high voltage. It calls your attention to items or operations that could be dangerous to you & other persons operating this equipment. Read the message & follow the instructions carefully.



WARNING

Indicates a potentially hazardous situation, that if not avoided, can result in minor to moderate injury or serious damage to the product. The situation described in the CAUTION may, if not avoided, lead to serious results. Important safety measures are described in CAUTION (as well as WARNING), so be sure to observe them.



CAUTION

Indicates a potentially hazardous situation, that if not avoided, can result in minor to moderate injury or serious damage to the product. The situation described in the CAUTION may, if not avoided, lead to serious results. Important safety measures are described in CAUTION (as well as WARNING), so be sure to observe them.



NOTE

Notes indicate an area or subject of special merit, emphasizing either the product’s capability or common errors in operation or maintenance.



TIP

Tips give a special instruction that can save time or provide other benefits while installing or using the product. The tip calls attention to an idea that may not be obvious to first-time users of the product.

XLT warrants gas ovens manufactured after April 1, 2009 utilizing quietFIRE™ burners and all electric ovens manufactured after April 1, 2011 to be free from any defect in material and workmanship under normal use for five (5) years from the date of original purchase by the end user, and further warrants main fan blades, conveyor shafts, and conveyor bearings for ten (10) years. XLT further warrants all ovens to be free from rust for ten (10) years from the date the equipment is originally purchased. XLT warrants AVI hoods to be free from any defect in material and workmanship under normal use for two (2) years from the date of original purchase by the end user. In the event of a part failure, XLT will furnish a replacement part and pay for all labor associated with the replacement of the part if, upon inspection, XLT determines that the part is defective. This warranty is extended to the original end user purchaser and is not transferable without prior written consent of XLT. Damages are limited to the original purchase price.

DUTIES OF THE OWNER:

- The owner must inspect the equipment and crates at time of receipt. Damage during shipment is to be immediately reported to the carrier and also to XLT.
- The equipment must be installed and operated in accordance with the written instructions furnished with the unit.
- This warranty shall not excuse the owner from properly maintaining the equipment in accordance with the written instructions furnished with the unit.
- A copy of the “Initial Start-Up Checklist” must be filled out and returned to XLT Ovens and the Authorized Distributor when the unit is initially installed, and/or when the unit is removed and installed in another location.
- The gas, electric, and HVAC utilities must be connected to the oven and installed by locally licensed contractors.
- Failure to contact XLT Ovens prior to contacting a repair company for warranty work voids any and all warranties.

WHAT IS NOT COVERED:

The following items are not covered by this warranty:

- Freight damage
- Any part that becomes defective because of utility services (power surges, high or low voltages, high or low gas pressure or volume, contaminated fuel, or improper utility connections)
- Any electronic part that becomes defective because of moisture and/or other contaminants
- Conveyor belts
- Filters
- Exhaust Fans
- Light Bulbs
- Normal maintenance or adjustments
- This warranty shall not apply if the equipment or any part is damaged as a result of accident, casualty, alteration, misuse, abuse, improper cleaning, improper installation, improper operation, natural disasters, or man-made disasters.

CLAIMS HANDLED AS FOLLOWS:

Should any such defect be discovered, XLT must be notified. Upon notification, XLT will arrange for necessary repairs to be made by an authorized service agent. Denial of services upon the arrival of an authorized service agent will release XLT of any and all warranty obligations.

XLT warrants gas ovens manufactured after January 1, 2011 utilizing quietFIRE™ burners and all electric ovens manufactured after April 1, 2011 to be free from any defect in material and workmanship under normal use for two (2) years from the date of original purchase by the end user. XLT warrants AVI hoods to be free from any defect in material and workmanship under normal use for one (1) year from the date of original purchase by the end user. In the event of a part failure, XLT will furnish a replacement part to the Authorized Dealer if, upon inspection, XLT determines that the part is defective. The Authorized Dealer will pay for all labor associated with the replacement of the part. This warranty is extended to the original end user purchaser and is not transferable without prior written consent of XLT. Damages are limited to the original purchase price.

DUTIES OF THE OWNER:

- The owner must inspect the equipment and crates at time of receipt. Damage during shipment is to be immediately reported to the carrier and also to XLT.
- The equipment must be installed and operated in accordance with the written instructions furnished with the unit.
- This warranty shall not excuse the owner from properly maintaining the equipment in accordance with the written instructions furnished with the unit.
- A copy of the “Initial Start-Up Checklist” must be filled out and returned to XLT Ovens and the Authorized Dealer when the unit is initially installed, and/or when the unit is removed and installed in another location.
- The gas, electric, and HVAC utilities must be connected to the oven and installed by locally licensed contractors.
- Failure to contact the Authorized Dealer prior to contacting a repair company for warranty work voids any and all warranties.

WHAT IS NOT COVERED:

The following items are not covered by this warranty:

- Freight damage
- Any part that becomes defective because of utility services (power surges, high or low voltages, high or low gas pressure or volume, contaminated fuel, or improper utility connections)
- Any electronic part that becomes defective because of moisture and/or other contaminants
- Conveyor belts
- Filters
- Exhaust Fans
- Light Bulbs
- Normal maintenance or adjustments
- This warranty shall not apply if the equipment or any part is damaged as a result of accident, casualty, alteration, misuse, abuse, improper cleaning, improper installation, improper operation, natural disasters, or man-made disasters.

CLAIMS HANDLED AS FOLLOWS:

Should any such defect be discovered, the Authorized Dealer must be notified. Upon notification, the Authorized Dealer will arrange for necessary repairs to be made by an authorized service agent. The Authorized Dealer will notify XLT Ovens of all discovered defects.

NOTIFY CARRIER OF DAMAGE AT ONCE

Upon receiving of all goods shipped by a Common Carrier, check for any exterior damage that may indicate interior damage. If conditions permit, open all crates & do a full inspection for any damage while the delivery driver is still there. If there is damage, please note on the delivery receipt & call the carrier to make a freight damage claim within 24 hours of receipt. Failure to make a damage claim within the first 24 hours may void the opportunity to have the claim resolved.

XLT Ovens wants you to be totally satisfied with every aspect of owning & using your oven & hood. Your feedback, both positive & negative, is very important to us as it helps us understand how to improve our products & our company. Our goal is to provide you with equipment that we are proud to build & you will be proud to own.

To receive technical support for the oven or hood you purchased, XLT has qualified customer service personnel that can provide assistance on any type of XLT oven problem you may experience. Customer Service is available 24/7/365 or visit www.xltovens.com.



DANGER

Installation of all electric appliances & ventilation exhaust hoods should only be performed by a qualified professional who has read & understands these instructions & is familiar with proper safety precautions. Read this manual thoroughly before installing or servicing this equipment.

Save this Manual

This document is the property of the owner of this equipment.

XLT Ovens reserves the right to make changes in design & specifications, and/or make additions to or improvements to its product without imposing any obligations upon itself to install them in products previously manufactured.

All Right Hand & Left Hand designations in this manual are from the point of view as if standing directly in front of the glass sandwich door.

Revision History Table		
Revision	Comments	Date
A	New Release	04/01/2013
B	Added Start-up Procedure	06/06/2013

Warning & Safety Information..... 2

Warranty..... 4

Oven & Hood Descriptions 8

Oven Dimensions & Weights..... 10

Oven Electrical Requirements..... 12

Oven Only Rough-In Specifications 13

Oven Assembly 14

Oven Installation 20

Oven Fire Suppression 21

Oven Ventilation Requirements & Guidelines..... 23

Oven Initial Start-Up..... 24

Oven Operation 25

Oven Operator Controls 26

Oven Cleaning..... 27

Oven Maintenance..... 31

Oven Troubleshooting..... 32

Hood Description 35

Hood Dimensions & Weights..... 36

Hood Exhaust Flow Rates 38

Hood Electrical Requirements..... 40

Hood Rough-In Specifications..... 41

Hood Electrical Connections..... 42

Hood Installation 56

Hood Initial Start-Up..... 75

Hood Operator Controls 76

Hood Valance Kit..... 77

Hood Duct Wrap Kit 80

Hood Cleaning..... 81

Hood Troubleshooting..... 82

Electrical Schematics 84

Certifications 97

Oven Start-Up Checklist 99

Hood Start-Up Checklist 101

This manual covers the following XLT Oven & AVI Hood models:

Ovens		Hoods	
Standard	World	Standard	World
XLT-1832D-EL-S	XLT-1832D-EL-W	AVI-1832C-EL-S	AVI-1832C-EL-W
XLT-1855D-EL-S	XLT-1855D-EL-W	AVI-1855C-EL-S	AVI-1855C-EL-W
XLT-2440D-EL-S	XLT-2440D-EL-W	AVI-2440C-EL-S	AVI-2440C-EL-W
XLT-3240D-EL-S	XLT-3240D-EL-W	AVI-3240C-EL-S	AVI-3240C-EL-W
XLT-3255D-EL-S	XLT-3255D-EL-W	AVI-3255C-EL-S	AVI-3255C-EL-W
XLT-3855D-EL-S	XLT-3855D-EL-W	AVI-3855C-EL-S	AVI-3855C-EL-W



The first 2 digits of the model number represent the conveyor width and the last two digits indicate the bake chamber length. The “EL” designates electrically heated ovens. The ovens may be used in a single, double, or triple stack configuration. All models have a single control box, which can be mounted on either the right-hand or left-hand side, and are heated by electric elements. All models can be configured for a split belt conveyor.





OVEN DESCRIPTION

Food product is placed on the stainless steel wire conveyor belt on one side of the oven. The conveyor then transports the food through the bake chamber at a user-controlled speed. This provides repeatable and uniform food cooking. The conveyors can be easily configured to move either left-to-right or right-to-left. A large center sandwich door allows the introduction or removal of food items for cooking at shorter times. Precise temperatures are user adjustable and maintained by a digital control.

An easily removable front panel allows the full cleaning of the oven interior. All exposed oven surfaces both exterior and interior are stainless steel. The conveyor is a one piece design and is removed from the side which has the control box. No tools are required for disassembly and cleaning of the conveyor or oven interior. The oven itself is mounted on lockable swivel casters for easy moving and maintenance.

Accessories such as extended conveyor shelves, base shelves, cool fronts, fire suppression components, and perforated crumb trays are available from XLT. In addition, moving equipment such as carts and lifting jacks are available to help install and move ovens. Please contact XLT Ovens or your Authorized Distributor for more information.

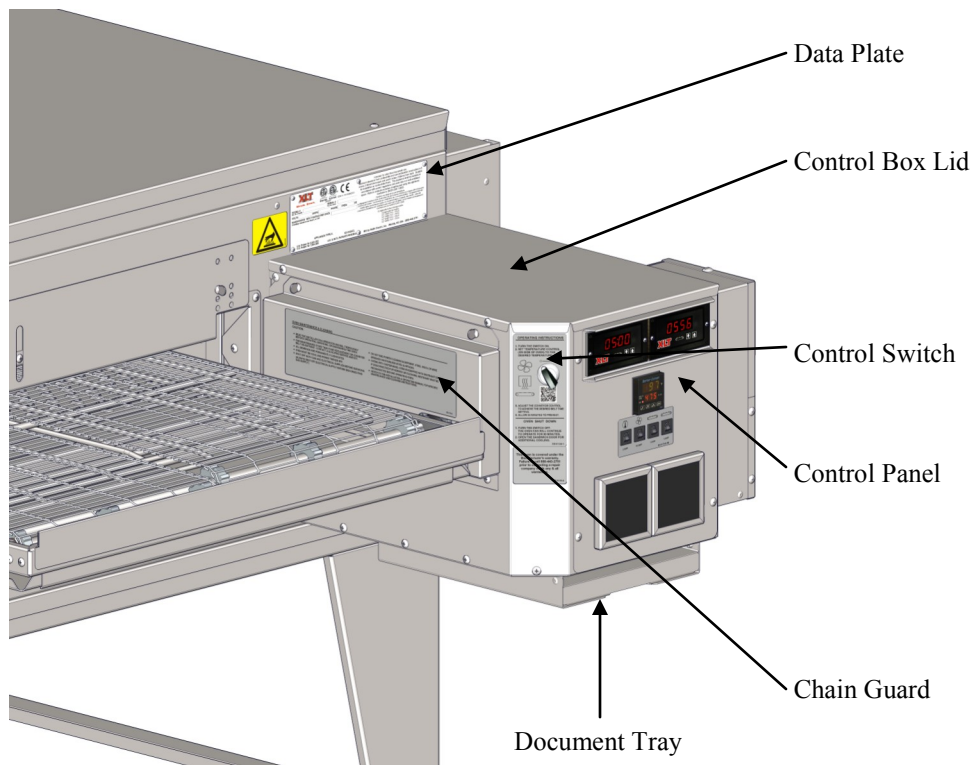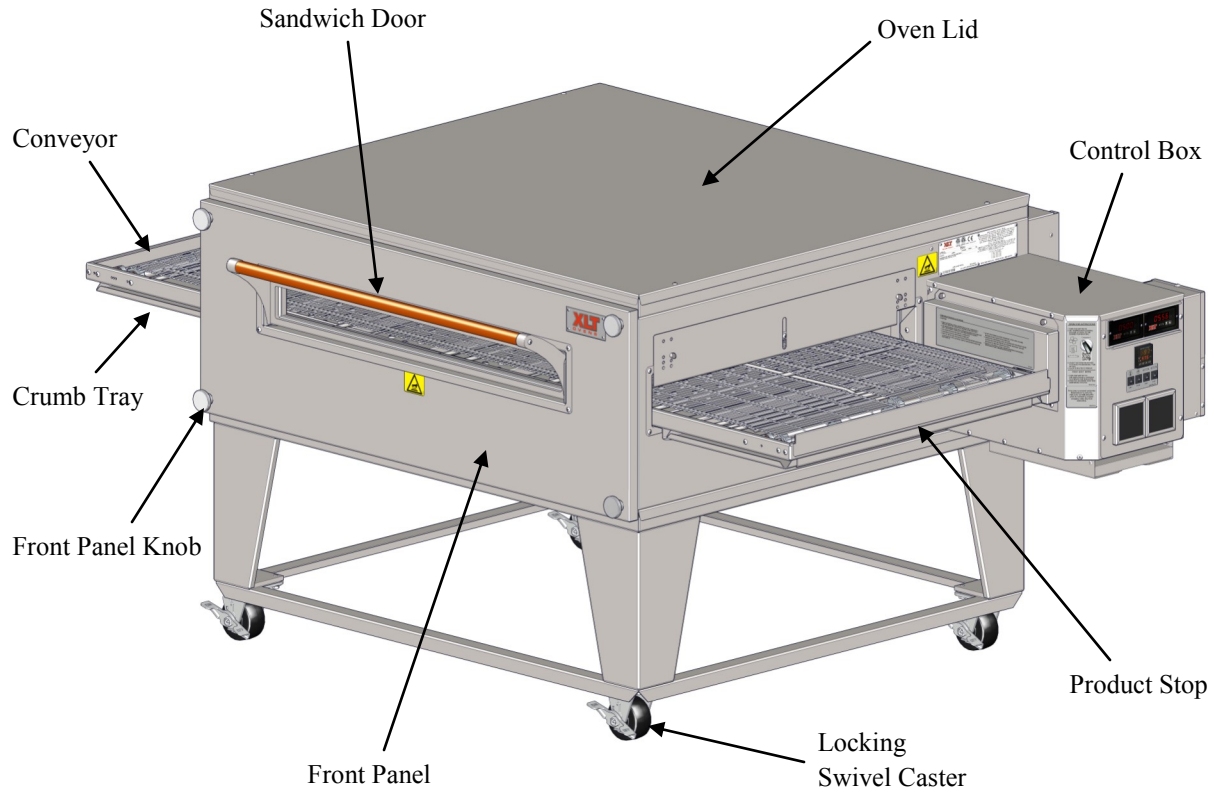

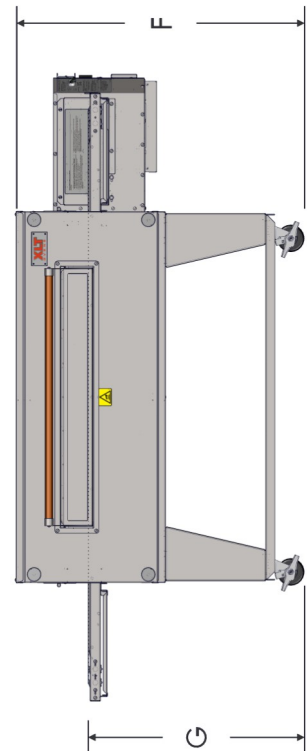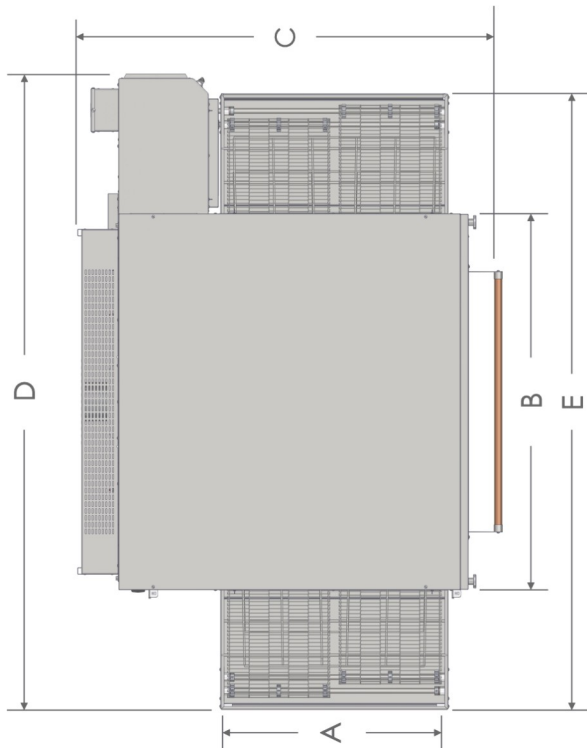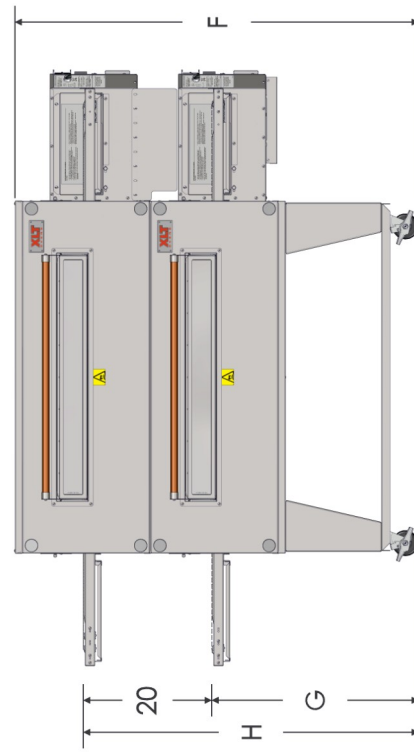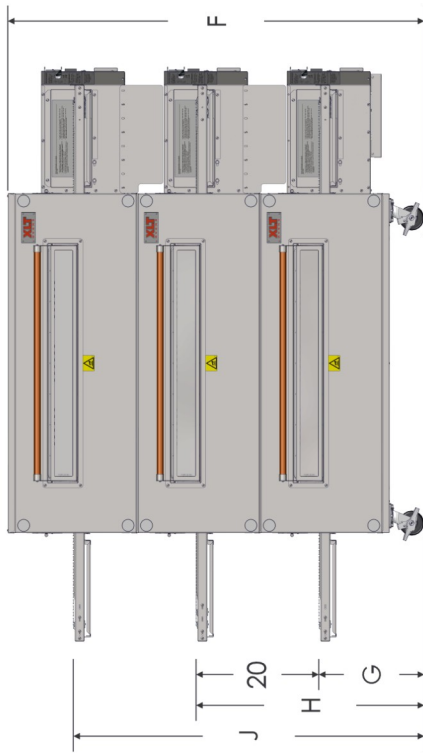

SINGLE OVEN	A	B	C	D	E	F	G	H	J	OVEN WEIGHT	CRATED WEIGHT
1832	18 [457]	32 [813]	48 3/8 [1229]	70 1/4 [1784]	67 1/4 [1708]	42 3/4 [1086]	32 [813]	N/A	N/A	477 [216]	612 [278]
1855	18 [457]	55 [1397]	48 3/8 [1229]	93 1/4 [2369]	90 1/4 [2292]	42 3/4 [1086]	32 [813]	N/A	N/A	624 [283]	802 [364]
2440	24 [610]	40 [1016]	54 3/8 [1381]	78 1/4 [1988]	75 1/4 [1911]	42 3/4 [1086]	32 [813]	N/A	N/A	543 [246]	693 [314]
3240	32 [813]	40 [1016]	62 3/8 [1584]	78 1/4 [1988]	75 1/4 [1911]	42 3/4 [1086]	32 [813]	N/A	N/A	629 [285]	784 [356]
3255	32 [813]	55 [1397]	62 3/8 [1584]	93 1/4 [2369]	90 1/4 [2292]	42 3/4 [1086]	32 [813]	N/A	N/A	757 [343]	935 [424]
3855	38 [965]	55 [1397]	68 3/8 [1737]	93 1/4 [2369]	90 1/4 [2292]	42 3/4 [1086]	32 [813]	N/A	N/A	829 [376]	1017 [461]

DOUBLE STACK	A	B	C	D	E	F	G	H	J	OVEN WEIGHT	CRATED WEIGHT
1832	18 [457]	32 [813]	48 3/8 [1229]	70 1/4 [1784]	67 1/4 [1708]	62 3/4 [1594]	32 [813]	52 [1321]	N/A	863 [391]	1133 [514]
1855	18 [457]	55 [1397]	48 3/8 [1229]	93 1/4 [2369]	90 1/4 [2292]	62 3/4 [1594]	32 [813]	52 [1321]	N/A	1141 [518]	1497 [679]
2440	24 [610]	40 [1016]	54 3/8 [1381]	78 1/4 [1988]	75 1/4 [1911]	62 3/4 [1594]	32 [813]	52 [1321]	N/A	981 [445]	1281 [581]
3240	32 [813]	40 [1016]	62 3/8 [1584]	78 1/4 [1988]	75 1/4 [1911]	62 3/4 [1594]	32 [813]	52 [1321]	N/A	1142 [518]	1452 [659]
3255	32 [813]	55 [1397]	62 3/8 [1584]	93 1/4 [2369]	90 1/4 [2292]	62 3/4 [1594]	32 [813]	52 [1321]	N/A	1380 [626]	1736 [787]
3855	38 [965]	55 [1397]	68 3/8 [1737]	93 1/4 [2369]	90 1/4 [2292]	62 3/4 [1594]	32 [813]	52 [1321]	N/A	1513 [686]	1889 [857]


TRIPLE STACK	A	B	C	D	E	F	G	H	J	OVEN WEIGHT	CRATED WEIGHT
1832	18 [457]	32 [813]	48 3/8 [1229]	70 1/4 [1784]	67 1/4 [1708]	67 3/4 [1721]	17 [432]	37 [940]	57 [1448]	1216 [552]	1621 [735]
1855	18 [457]	55 [1397]	48 3/8 [1229]	93 1/4 [2369]	90 1/4 [2292]	67 3/4 [1721]	17 [432]	37 [940]	57 [1448]	1624 [737]	2158 [979]
2440	24 [610]	40 [1016]	54 3/8 [1381]	78 1/4 [1988]	75 1/4 [1911]	67 3/4 [1721]	17 [432]	37 [940]	57 [1448]	1386 [629]	1836 [833]
3240	32 [813]	40 [1016]	62 3/8 [1584]	78 1/4 [1988]	75 1/4 [1911]	67 3/4 [1721]	17 [432]	37 [940]	57 [1448]	1617 [733]	2082 [944]
3255	32 [813]	55 [1397]	62 3/8 [1584]	93 1/4 [2369]	90 1/4 [2292]	67 3/4 [1721]	17 [433]	37 [941]	57 [1448]	1964 [891]	2498 [1133]
3855	38 [965]	55 [1397]	62 3/8 [1584]	93 1/4 [2369]	90 1/4 [2292]	67 3/4 [1721]	17 [433]	37 [941]	57 [1448]	2156 [978]	2720 [1234]

NOTE: All dimensions in inches [millimeters], ± 1/4 [6], unless otherwise noted.
All weights in pounds [kilograms] unless otherwise noted.


Electric Oven Electrical Requirements								
Per EACH Oven								
Oven Model	STANDARD			WORLD			ALL	
	Volts AC	Amps	Hertz	Volts AC	Amps	Hertz	Phase	KW
1832	208/240	44/38	60	380	24	50	3	16
1855	208/240/480	88/77/38			48			32
2440	208/240/480	75/65/33			41			27
3240	208/240/480	75/65/33			41			27
3255	208/240/480	88/77/38			48			32
3855	208/240/480	88/77/38			48			32
4 Wire Service - L1, L2, L3 +1 Ground (per oven)			5 Wire Service - L1, L2, L3 N +2 Grounds (per oven)					

FOR EACH OVEN:


- A separate circuit breaker must be provided for each oven deck.
- Electrical connections must be accessible when the ovens are in the installed position.
- Electrical connections must meet all local code requirements.
- Ensure ovens are grounded per local codes.

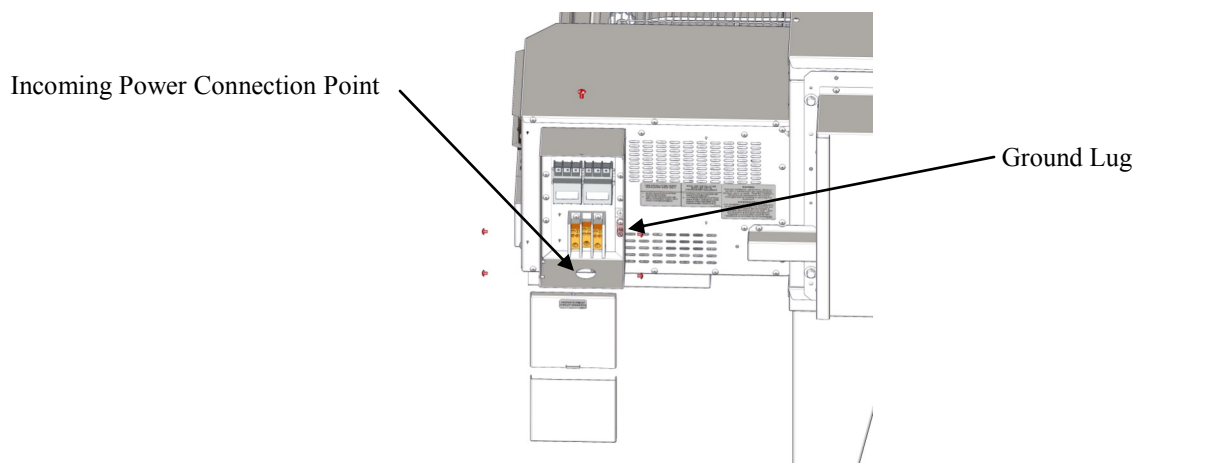


Control Box Rear - Standard

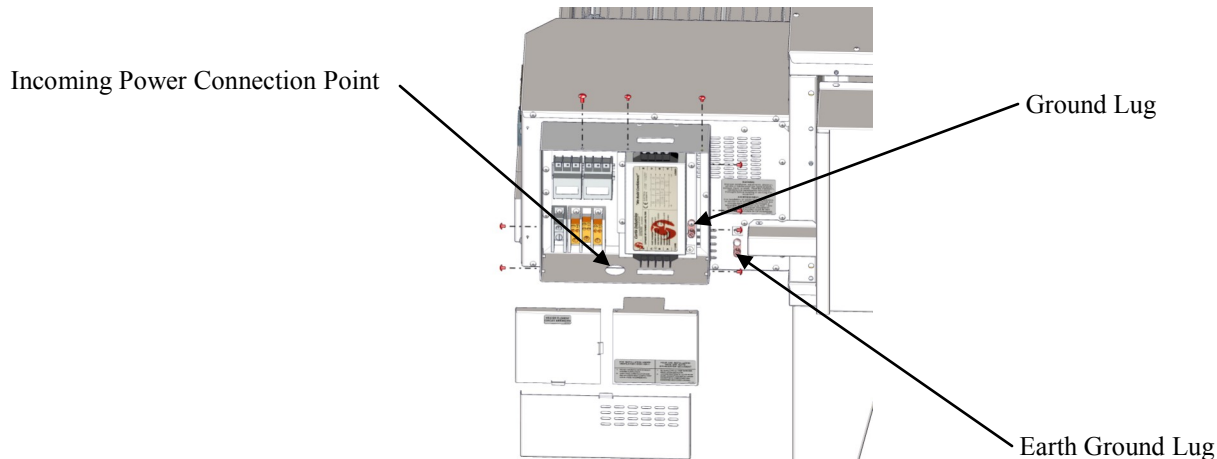

Control Box Rear - World

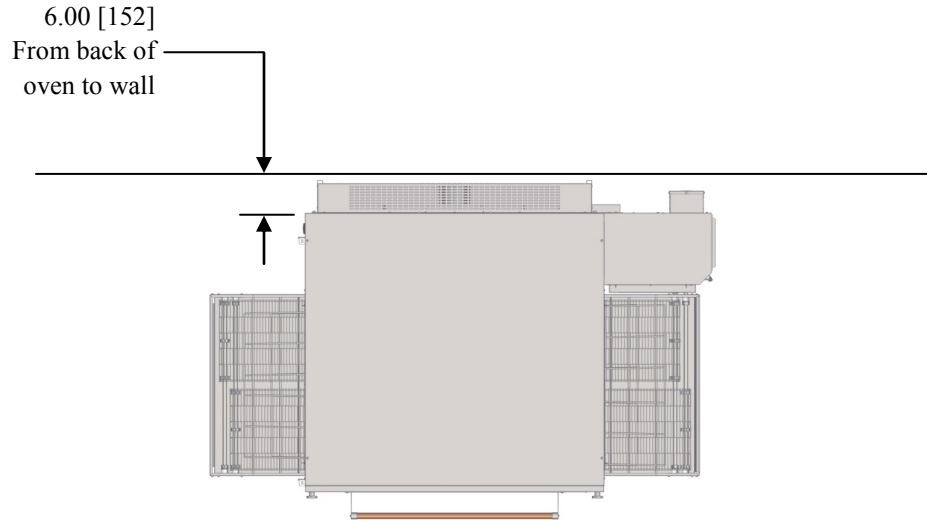


NOTE Utilities must be easily accessible when the ovens are in the installed position. Do not install utilities behind the ovens.

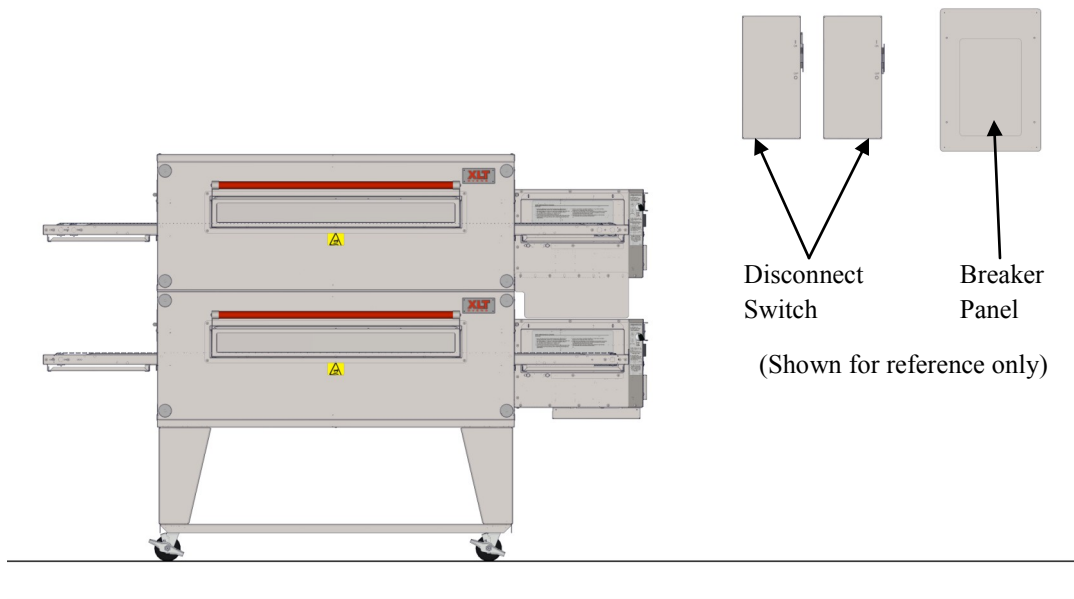




NOTE All installations must conform to local building and mechanical codes. It is required that the ovens be placed under a ventilation hood to provide exhaust ventilation and adequate air supply.

OVEN ASSEMBLY

Base Assembly - Triple Stack

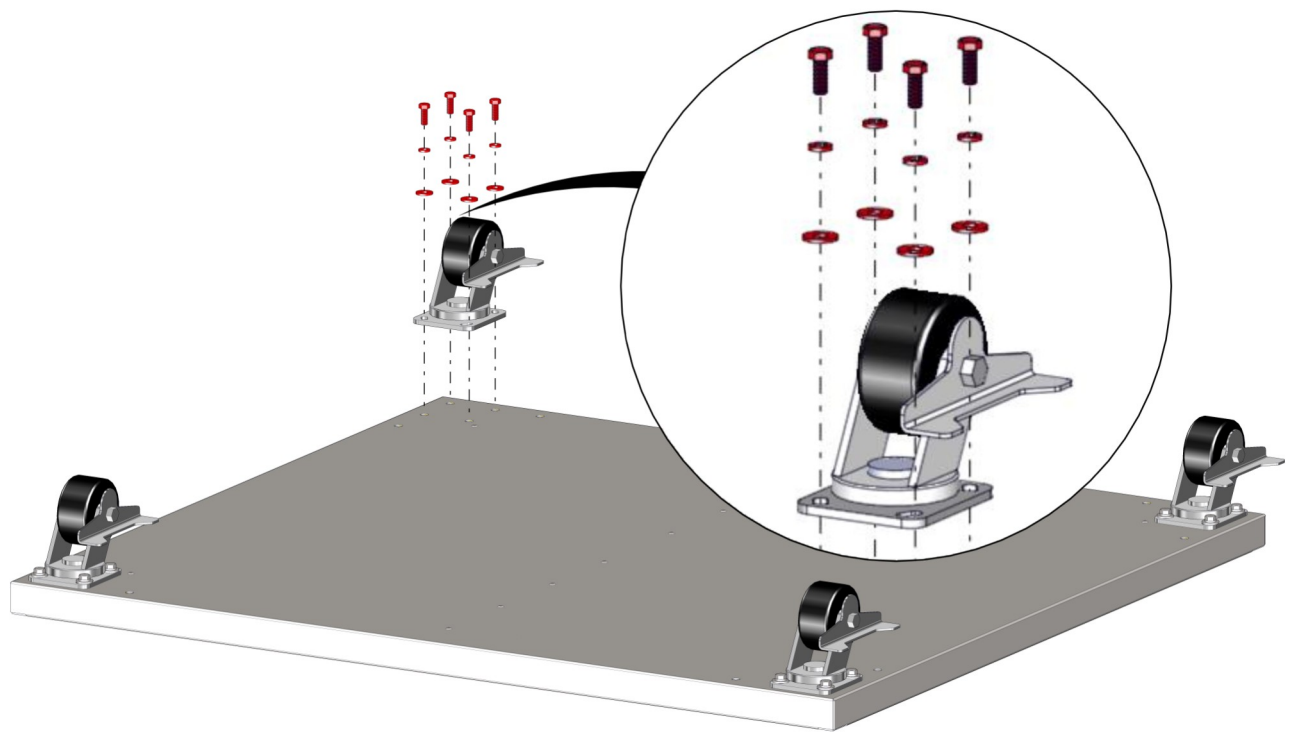

Base Assembly - Single & Double Stack

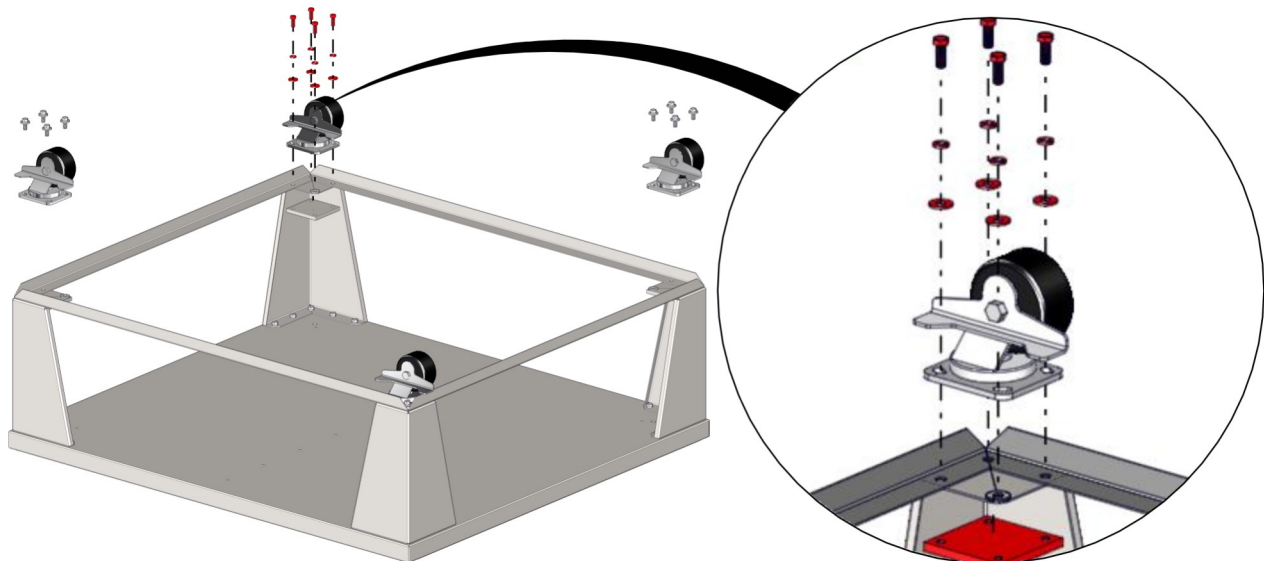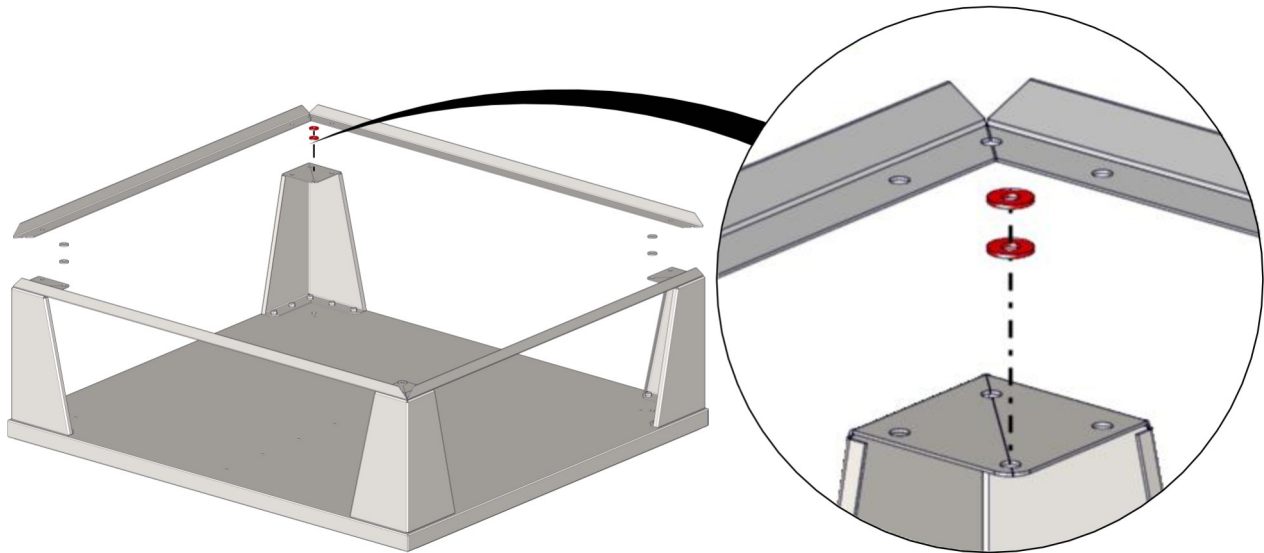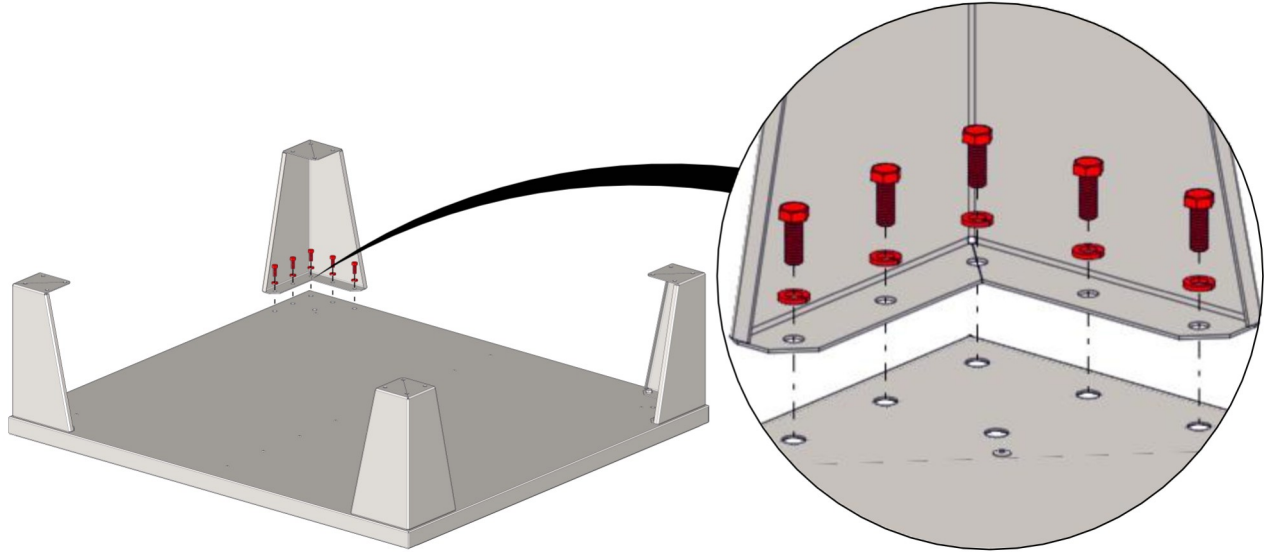

WARNING & SAFETY INFORMATION

XLT ovens can easily be moved and stacked with the proper lifting equipment. The use of XLT approved lifting equipment is highly recommended. Contact XLT for more information.

**DANGER**


- These ovens are heavy & can tip or fall causing bodily injury.
- NEVER place any part of your body beneath any oven that is suspended by the lifting jacks. A crush hazard exists if the oven falls or slips.
- DO NOT place your hands on the lifting jack vertical pole beneath the jack's winch. As the jack's winch descends when you turn the jack handle, a pinch point is created between the winch & the pole.


**CAUTION**

BE CAREFUL when rolling the oven on the cart, especially when going up or down ramps & over bumps. Leave the straps/banding on until the oven is near the assembly area.


**DANGER**

- Make sure that the notch on tube of the winch assembly is aligned with the pin in the tripod base as shown. These alignments are important and keep the jack aligned properly.
- Check for smooth operation. The cable should not be pinched and should pass smoothly over the pulley on top of the pole assembly.
- Inspect cable prior to each use.
- If cable is frayed or shows signs of excessive wear and tear, DO NOT USE until cable is replaced.
- At a minimum replace the cable annually with wire rope that meets or exceeds the jack manufacturer's specifications.
- Do not exceed the stated capacity of the jack.

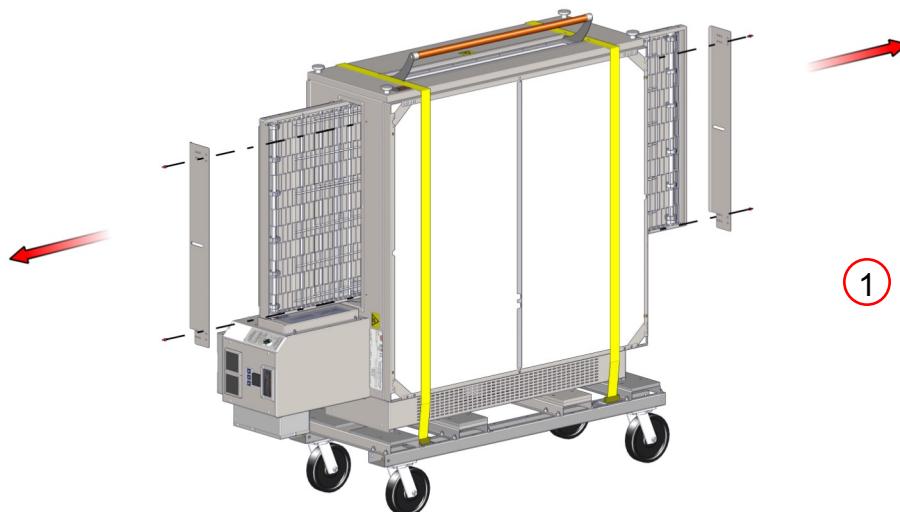

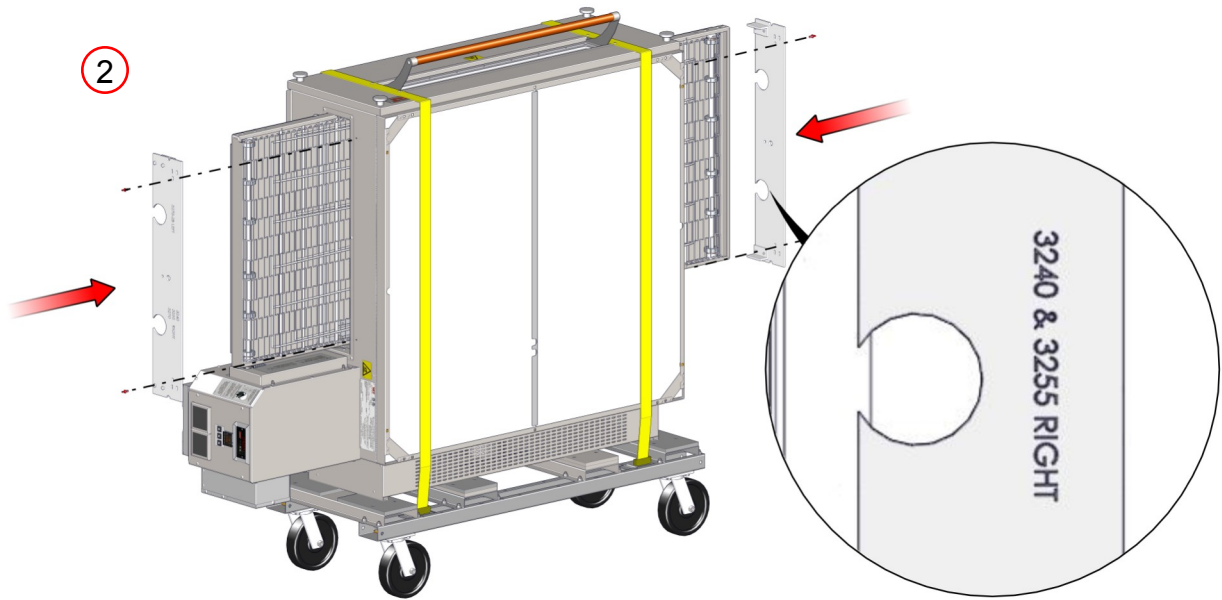

NOTE The Lifting Pipe hole, marked for the appropriate oven size, must be installed closest to the control box.

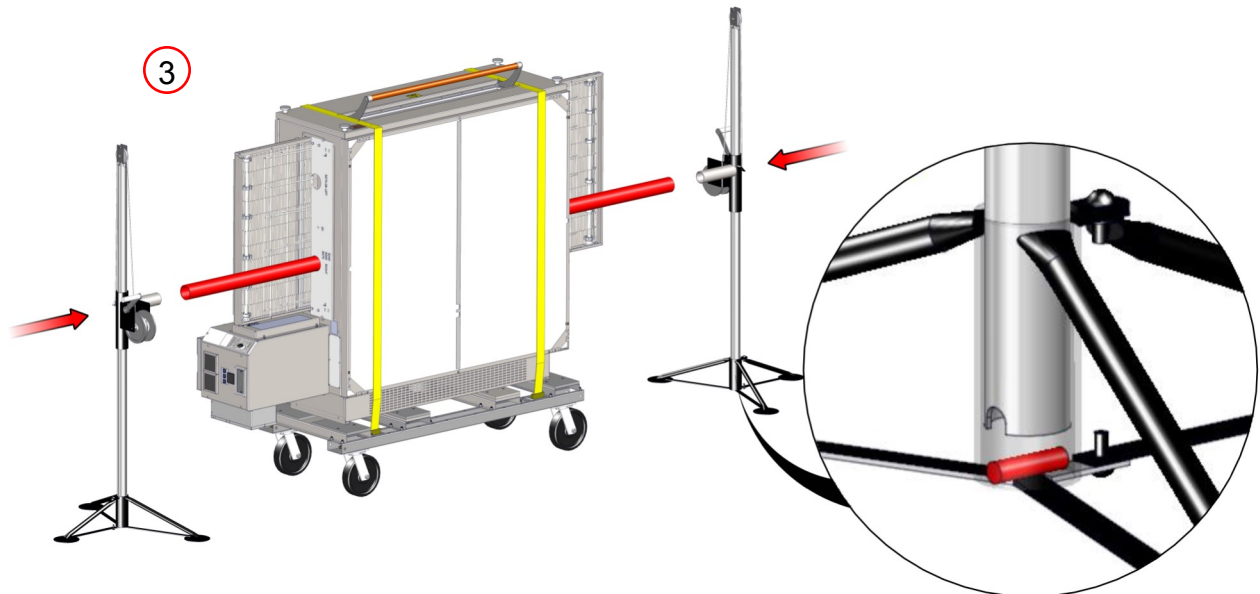


Stacking the Ovens

**DANGER**



Failure to engage the Lifting Jacks into the Lifting Pipe properly and completely will result in damage, injury, or death from a falling oven.

**DANGER**

- Both jacks should be raised in unison, otherwise they may bind and a dangerous situation will develop.
- Do not put any part of yourself under the oven at any time.
- The Oven is top heavy. Be careful.

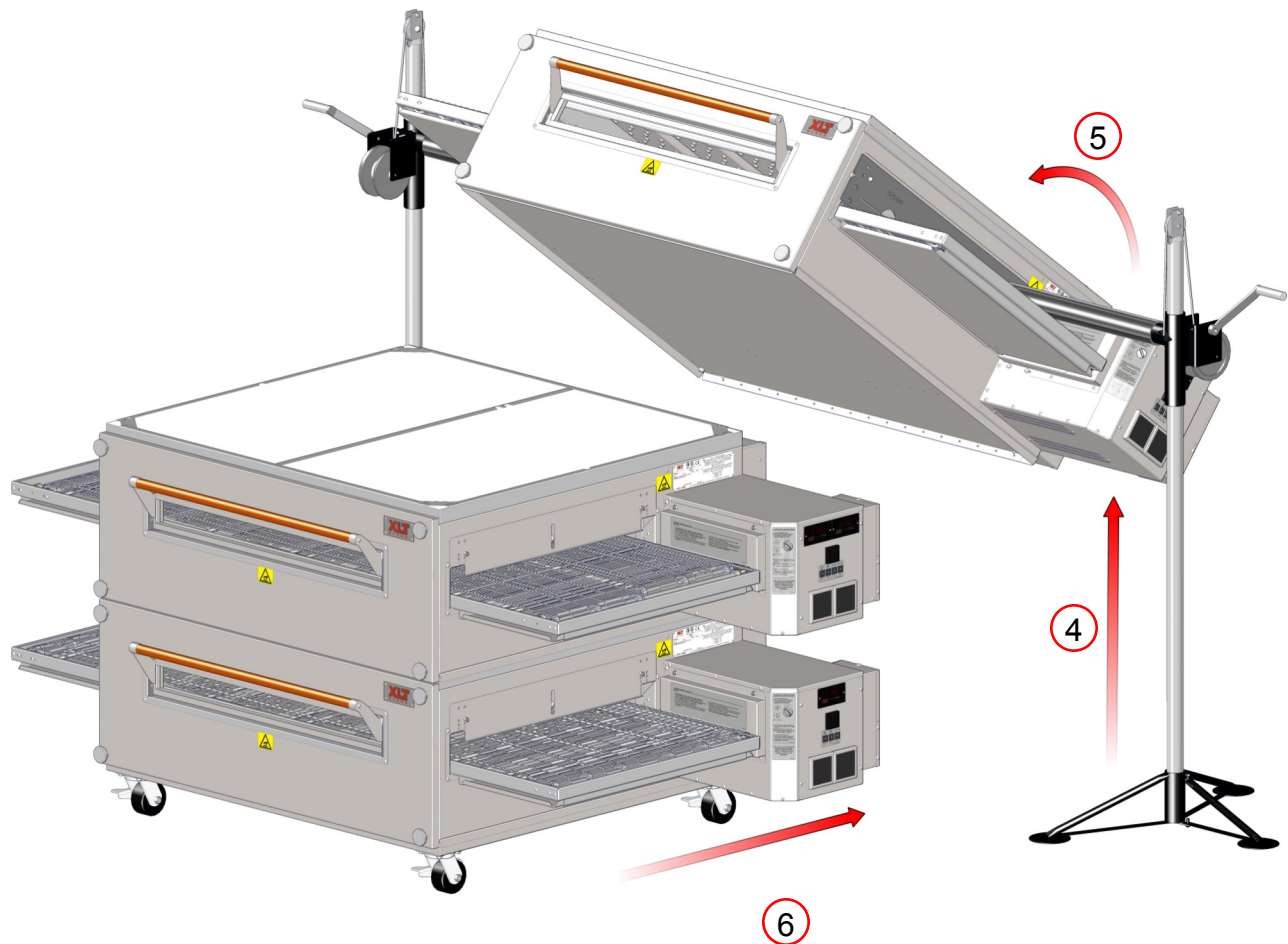


Stacking the Ovens

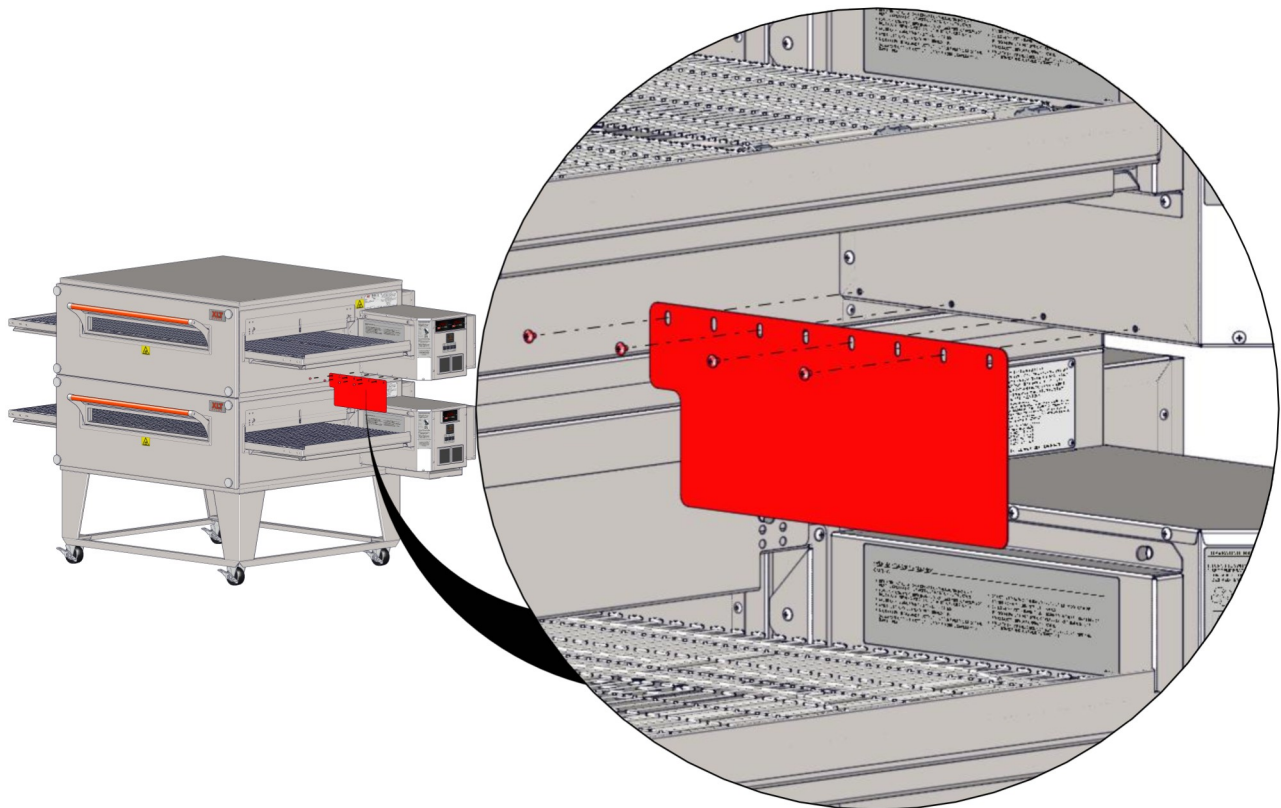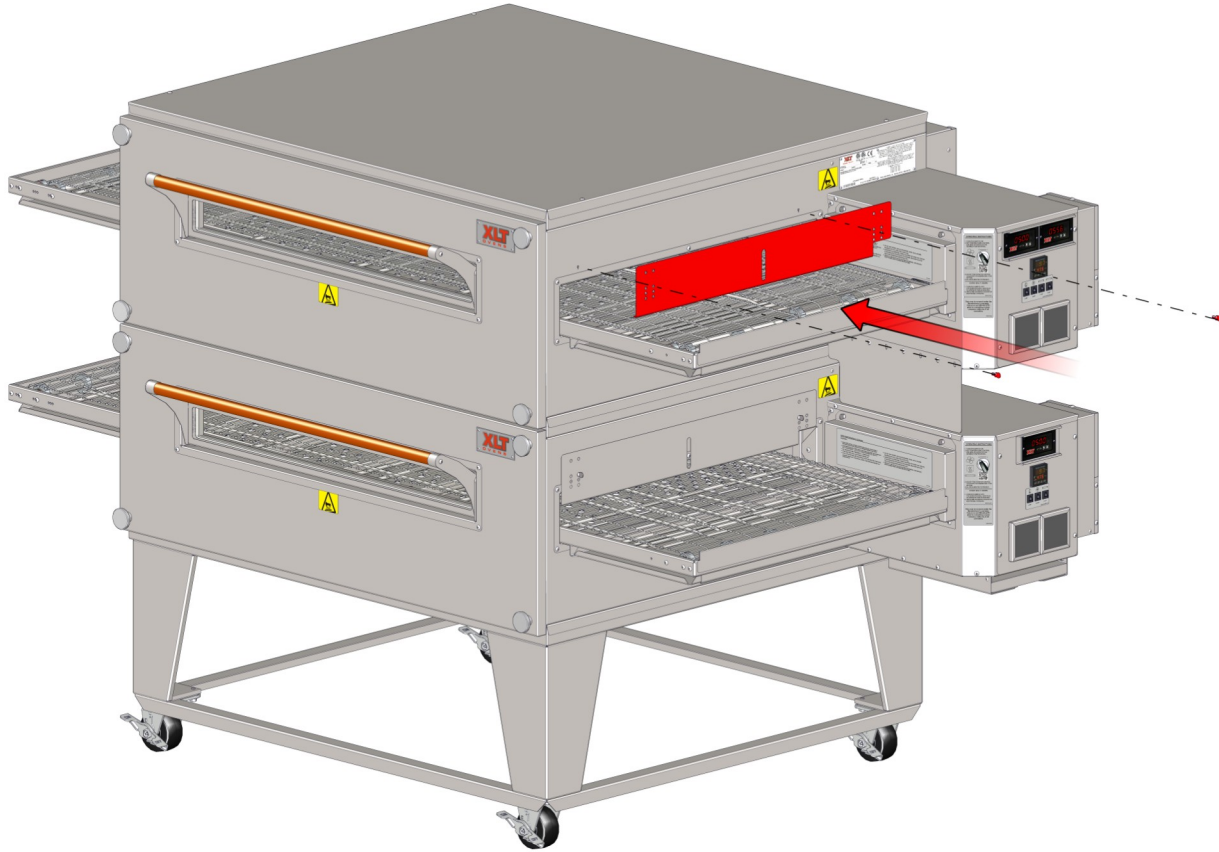

Physical Location & Spacing Requirements

These ovens are suitable for installation on either combustible or non-combustible floors, and adjacent to either combustible or non-combustible walls. The motor cover is designed to provide the proper clearance to the back of the oven. The minimum side clearances are 6in. / 150mm, measured from the end of the conveyor.


 **All installations must conform to local building and mechanical codes.**

NOTE

Restraint

Because all ovens are equipped with casters, all installations must be configured with a restraint to limit the movement of the oven without depending on the electric power supply cord to limit the oven movement. One (1) restraint kit, which includes one (1) eye bolt, (1) stainless steel clip & a cable, is required for each oven stack, regardless if used on a single, double, or triple configuration. The clip should be installed in the lowest hole of the back wall on the control end of the lowest oven in the stack. The lag eye bolt must be installed into a structural member of a wall or the floor. It is the owner's responsibility to ensure the restraint is installed correctly.

Upon completion of performing any service or cleaning functions that require removal of the restraint, insure that it is correctly re-attached to the oven.

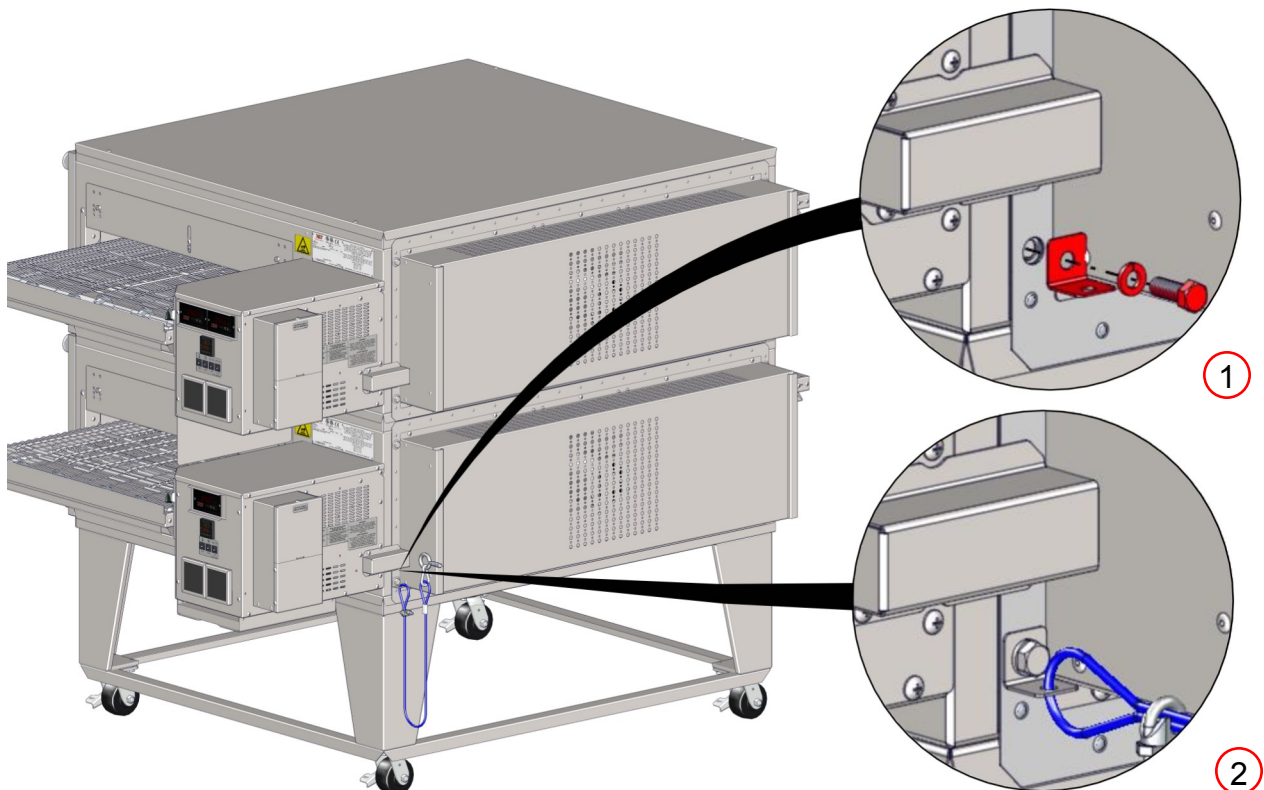



The requirement for fire suppression systems vary by location and the authority having jurisdiction. If you are required to install fire suppression on your oven, a pre-assembled piping kit is available that utilizes pre-existing holes that simplify installation and future service.



This design has been tested and approved to successfully comply with fire suppression codes. It uses only two (2) nozzles per bake chamber, and allows crumb trays, chain guards, and all other accessories to be easily removed. The kit does not interfere with any operations or maintenance.

A flexible hose that connects the oven to the rest of the fire suppression system is also available. This allows easy movement of the oven(s) for cleaning and maintenance.



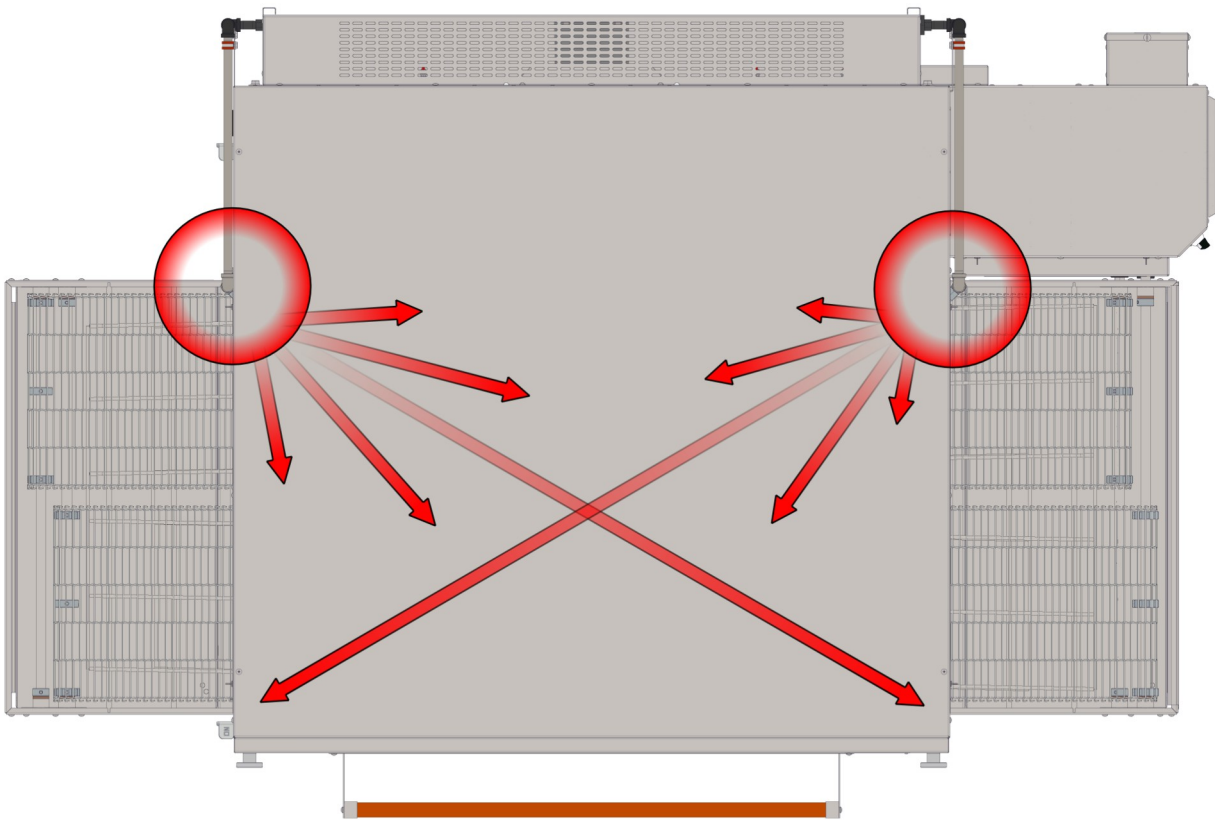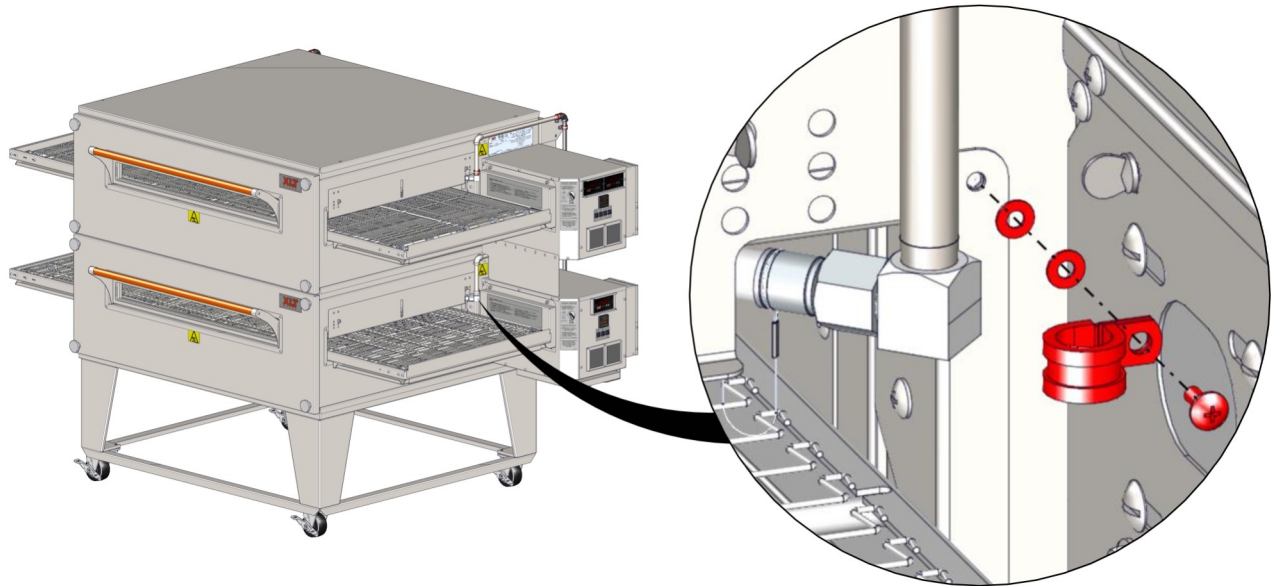

Ventilation Requirements

A powered ventilation hood is required to remove heat and vapors. Some provision must be made to replenish the amount of air that is extracted from the building. The hood and HVAC installation must meet local building and mechanical codes. Requirements vary throughout the country depending upon location. Proper ventilation is the oven owner's responsibility. The AVI Hood system is designed to meet all requirements for XLT ovens and it is our recommendation that this system be used.

Ventilation Guidelines

Obtain information from the authority having jurisdiction to determine the requirements for your installation. Your ventilation hood supplier and HVAC contractor should be contacted to provide guidance. An air balance test is highly recommended, performed by a licensed contractor. A properly engineered and installed ventilation hood and HVAC system will expedite approval, reduce all maintenance costs, and provide a more comfortable working environment. XLT also recommends that the operator switches for the ovens and the operator switch for the exhaust fan be interlocked so that the exhaust fan gets energized whenever the ovens are turned on. For more information, see the following links at xltovens.com:

[Kitchen Ventilation Design Guide 1](#)

[Kitchen Ventilation Design Guide 2](#)

[Kitchen Ventilation Design Guide 3](#)

[Kitchen Ventilation Design Guide 4](#)

Ventilation Performance Test

After the oven and ventilation hood have been installed and are operating, a smoke candle can be used to "see" if the heat and vapors are being completely extracted. The test procedure is outlined below:

- The oven must be operating at 450°-500°F / 232°-260°C.
- The conveyor must be turned off.
- The ventilation hood exhaust fan must be turned on.
- Put a smoke candle in a pan on the conveyor belt at the center of the oven.
- Observe the smoke pattern coming out of the oven.
- Repeat the smoke candle test for each oven, as well as when all ovens are operating.

The ventilation hood must capture all of the smoke from the oven.

After the exhaust fan has been adjusted to completely capture and contain the heat, there needs to be a corresponding amount of make up air (MUA) introduced into the building to offset the amount of air volume being removed. An air balance test can determine the proper amount of make-up air flow rates.

All ovens are tested at the factory for functional operation. Operation is verified and adjustments are made to ensure proper function. However, field conditions are sometimes different than factory conditions. It is necessary to have an authorized service technician verify operation and make field adjustments if needed.

The Oven Initial Start-Up Checklist, found at the end of this manual, must be completed (both sides) at time of installation, signed by the Customer and returned to XLT Ovens and the Authorized Distributor to initiate Warranty Policy.

If the Start-Up Checklist is not filled out completely and returned to XLT Ovens, then the Warranty will not be honored.

Start-up Procedure:

Ensure that all ovens have been installed in accordance with the I&O Manual and that all utilities are connected to the ovens in compliance with local building codes. A copy of the Start-up checklist is located at the end of this manual.

1. Fill out Step 1 on the checklist with all information and print legibly.
2. Place all control boxes in service position, remove all blue tags from inside all control boxes and connect switch to wire harness. Start each oven and complete form.
3. Complete Start-up checklist with owner signature and return to XLT.



This oven is not capable of being safely placed in operation in the event of a power failure. No attempt should be made to operate this oven during power failure.

1

2

To Adjust Temperature Press
Either the Up or Down Arrow.


3

Use Up Arrow to Increase Time
Use Down Arrow to Decrease Time

4

Conveyor Belt Times (Min:Sec)		
Oven Models	MINIMUM	MAXIMUM
All	1:30	17:00

Oven Operating Temperature Range		
Oven Models	MINIMUM	MAXIMUM
All	400° F	590° F
	205° C	310° C

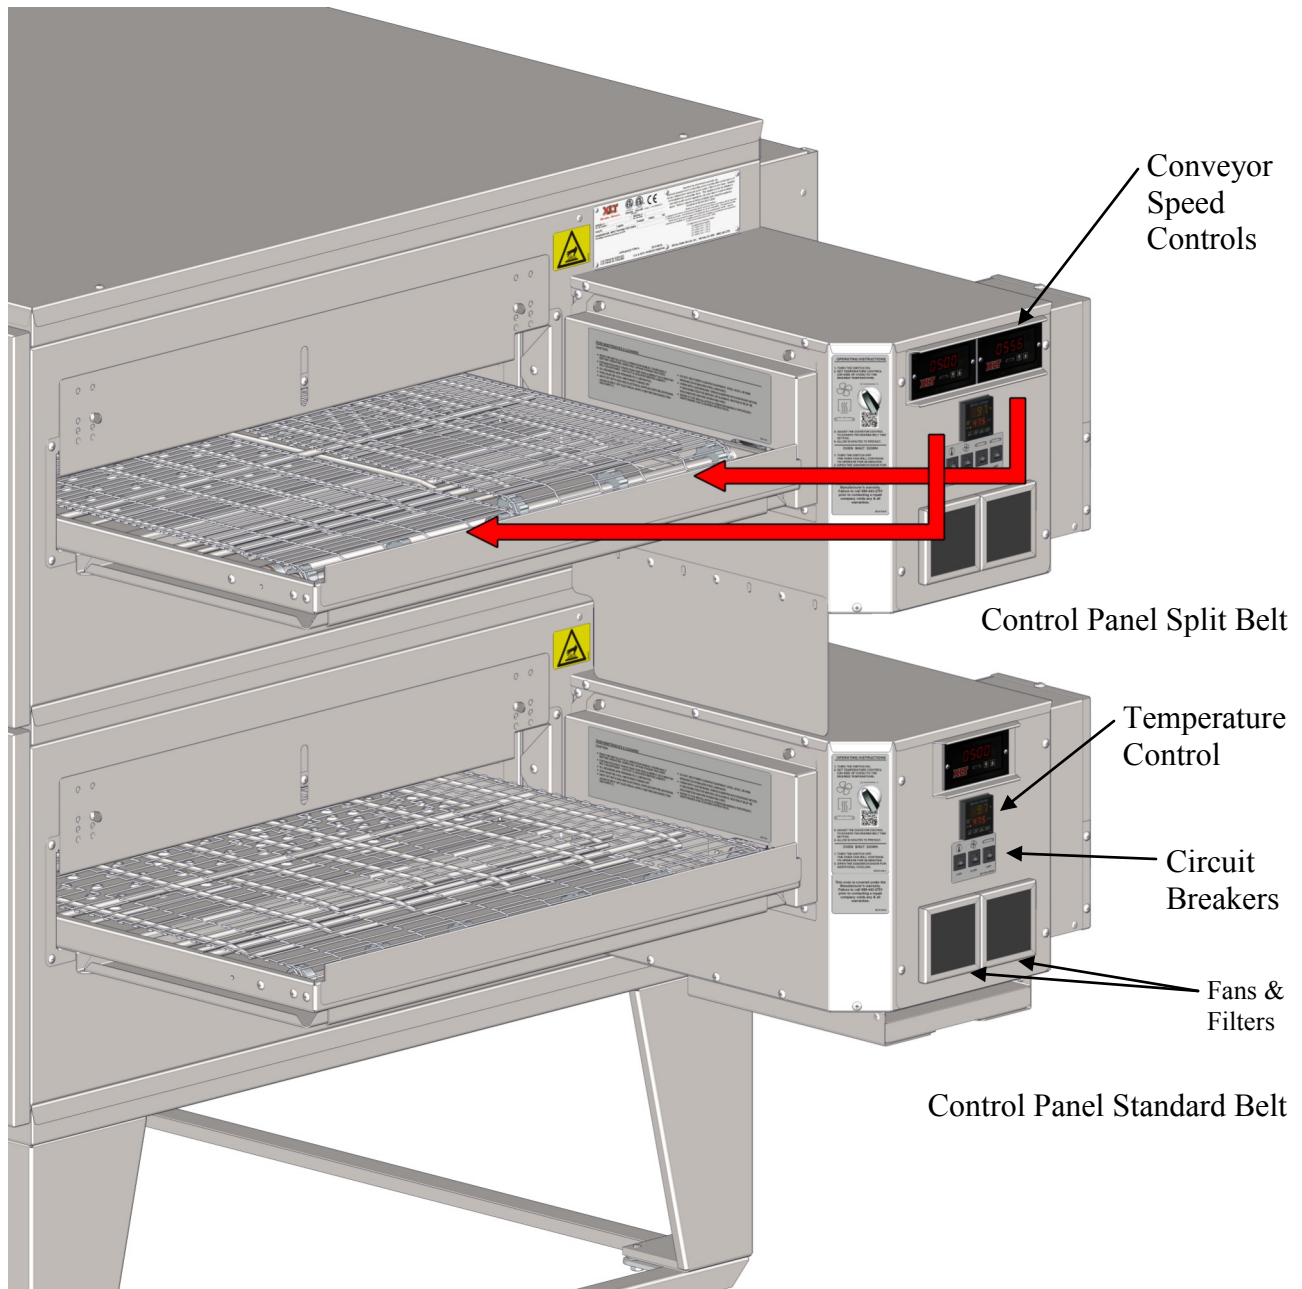


Your XLT oven is constructed of stainless steel. Most commercial cleaning agents may be used safely on all stainless steel surfaces. Check application restrictions on product label prior to usage. Observe recommended precautionary and safety measures as dictated by the product manufacturer. Do not use caustic cleaner on the conveyor bearings.

Do not use abrasive cleaners or abrasive pads as they can scratch stainless steel surfaces. Areas with heavy buildup should be sprayed and allowed to soak for up to 5 minutes prior to wiping clean. Always wipe with the “grain” of the surface to maintain appearance.

Do not use caustic cleaners on the control panel and/or electronic components. Only use cleaners compatible with Lexan® on the face of the conveyor control.

The most critical items to be cleaned are the filters on the cooling fans. The filters are held in place by the stainless steel fan guard/filter mounts & can be washed several times. Regular cleaning of the cooling filters is important to maintain air circulation within the control box. Depending upon store conditions, the filters should be cleaned weekly or as they get clogged with dust. Please contact XLT Ovens for replacement parts.

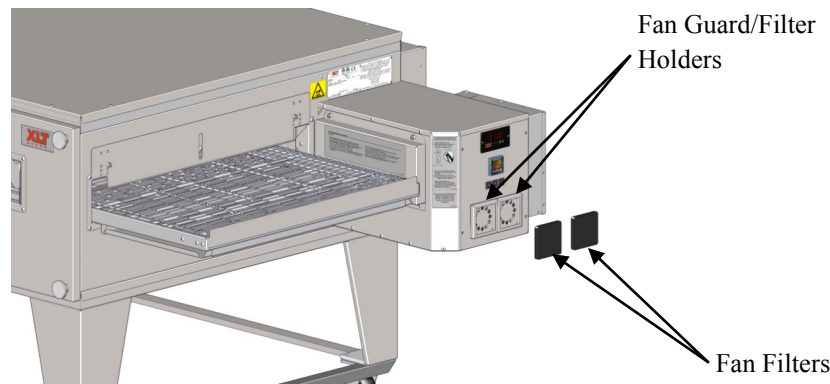


Oven must be cool and the electric cord unplugged before any cleaning or maintenance is done.



If the oven is to be removed from its installed location for cleaning or servicing, the following procedure is to be followed:

1. Shut off main electrical disconnect.
2. Unplug electric cord, if equipped.
3. Unlock casters.
4. Disconnect restraint.
5. When servicing or cleaning is complete, move oven to original location.
6. Connect restraint.
7. Lock casters.
8. Plug in electric cord, if equipped.
9. Turn on main electrical disconnect.
10. Follow normal starting instructions.

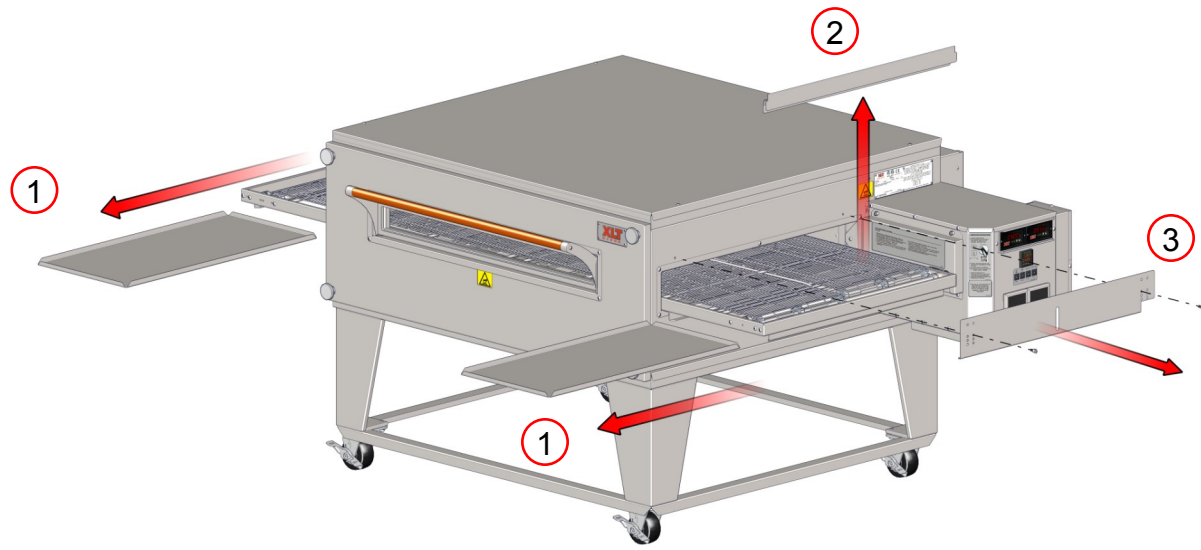


TIP




Opening the Sandwich Door will provide a grip location for removing the Front Panel.





CAUTION

Front Panels can weigh up to 75 lbs. [34 kg]. Use caution when lifting.

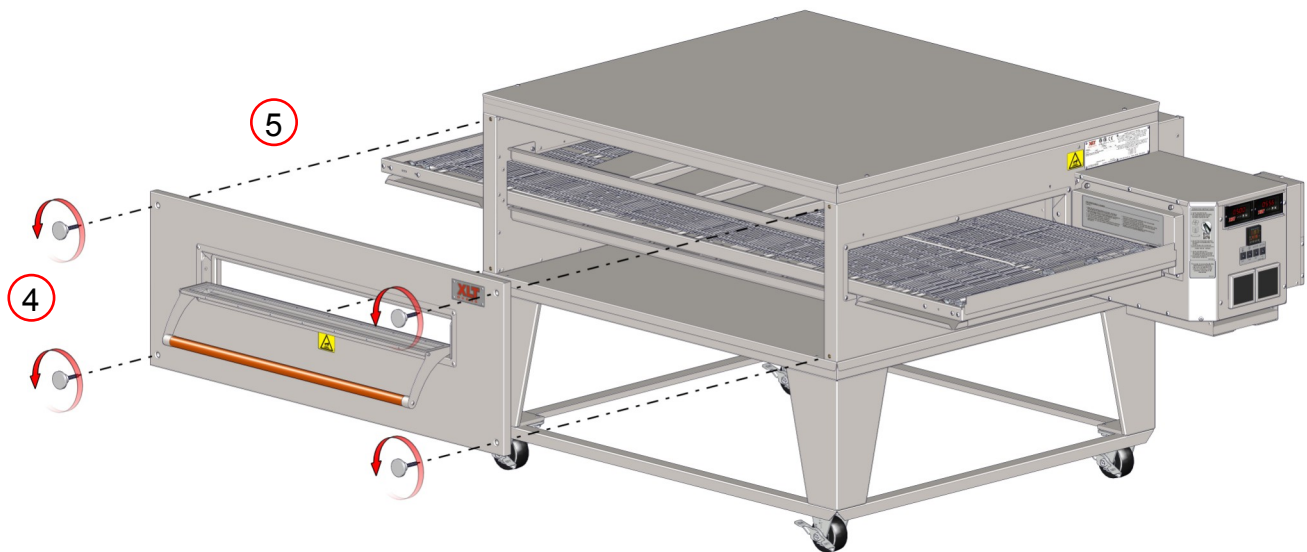

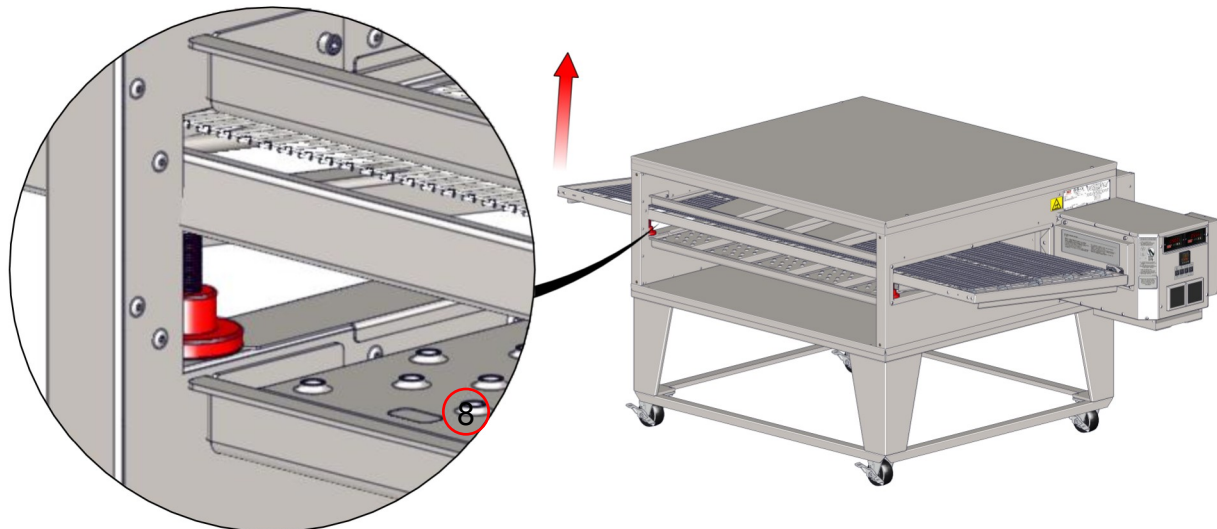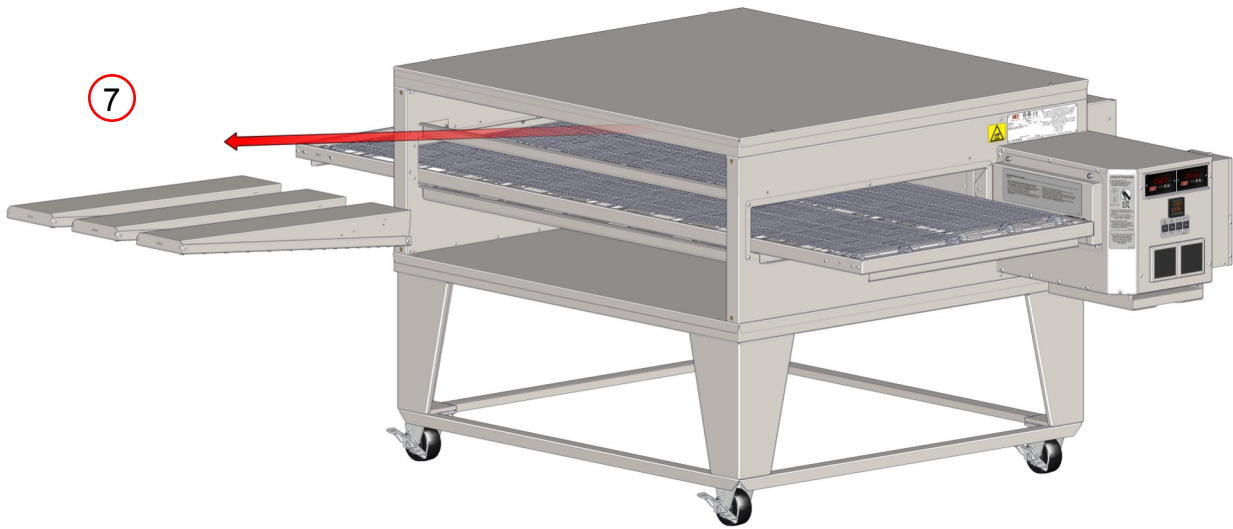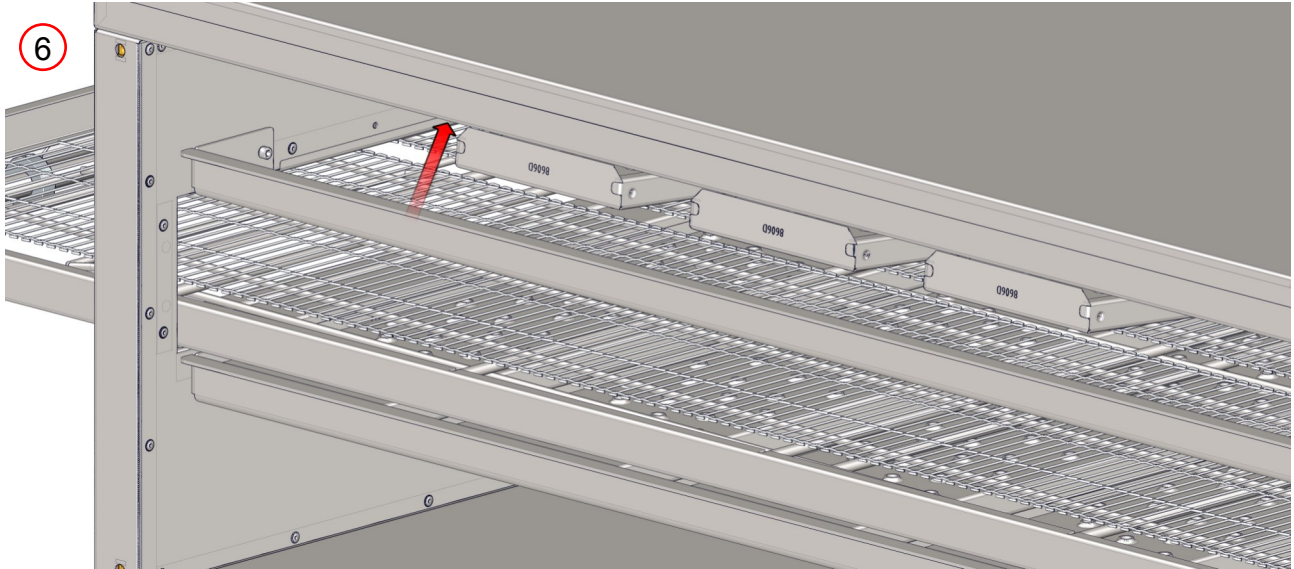

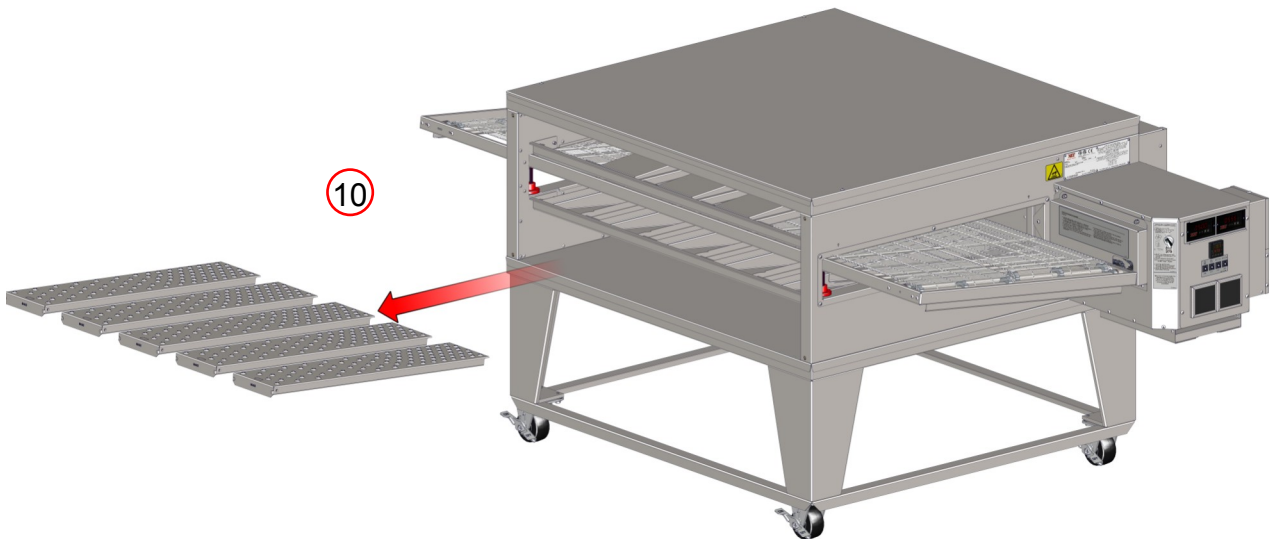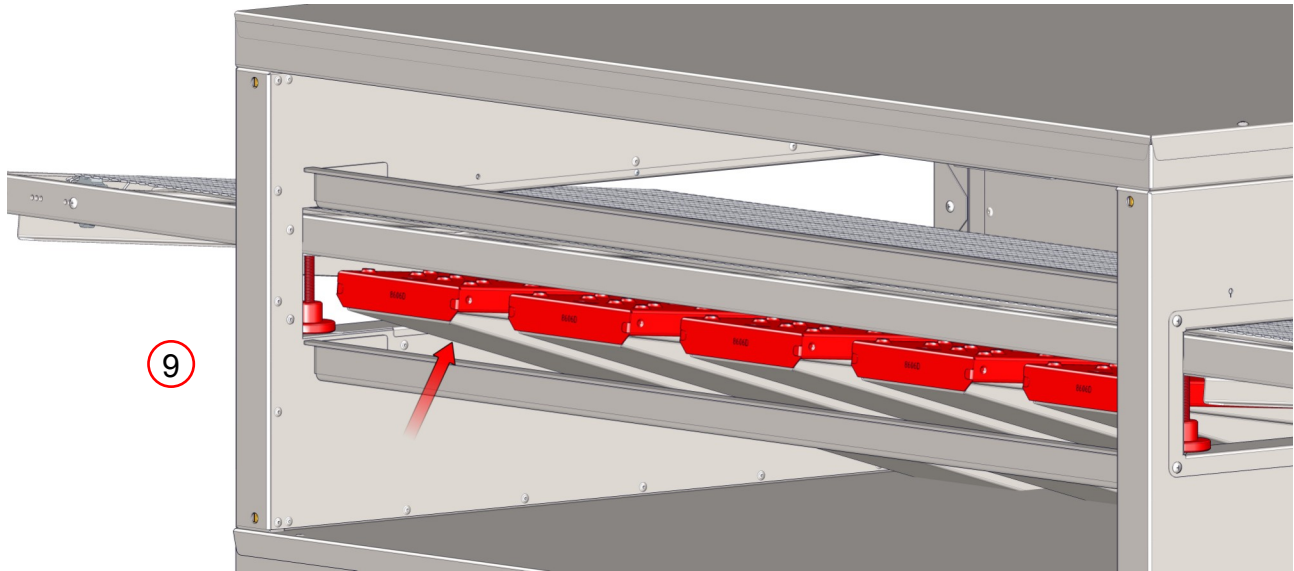

CAUTION


DO NOT spray liquid cleaning agents in the slots and holes in the following locations:

- Rear of Control Box
- Underneath Control Box
- Main Fan Motor Cover

As with any appliance, periodic maintenance is required. Many factors affect this schedule such as product mix and hours of usage. An example schedule is included.

Oven Maintenance Schedule					
	Daily	Weekly	Monthly	Semi-Annual	
Cleaning					
Empty Crumb Trays	<input type="checkbox"/>				
Wipe down Front, Sides, & Top	<input type="checkbox"/>				
Wipe down Control Box & Control Panel *	<input type="checkbox"/>				
Clean or Replace Fan Filters	<input type="checkbox"/>				
Remove large debris from Conveyor		<input type="checkbox"/>			
Wipe down Motor Cover		<input type="checkbox"/>			
Clean Sandwich Window		<input type="checkbox"/>			
Remove debris from Finger Outers			<input type="checkbox"/>		
Remove debris from inside Bake Chamber			<input type="checkbox"/>		
Remove debris from Main Fan Motor			<input type="checkbox"/>		
Clean Finger Outers				<input type="checkbox"/>	
Clean inside Bake Chamber				<input type="checkbox"/>	
Clean Conveyor Assembly				<input type="checkbox"/>	
Inspection					
Check Fan Filters for dirt	<input type="checkbox"/>				
Check Conveyor Wire Belt for Stretch		<input type="checkbox"/>			
Check Conveyor Drive Roller Chain for Stretch			<input type="checkbox"/>		
Adjust					
Conveyor Wire Belt			<input type="checkbox"/>		
Lubricate					
Conveyor Drive Roller Chain				<input type="checkbox"/>	
Replace					
Fan Filters				<input type="checkbox"/>	

Contact a factory representative or a local service company to perform all other maintenance and repairs.



DANGER

Oven must be cool and the electric cord unplugged before any cleaning or maintenance is done.

Contact a factory representative or a local service company to perform all other maintenance & repairs.

Proper Cooking

Experimentation is about the only way to determine proper time and temperature settings. While a pizza may look perfectly cooked on the outside, the inside may be undercooked. A thermometer is necessary to determine if food items are being properly cooked. Most health departments have rules and regulations that establish minimum temperatures for internal food temperatures. Most operators want to cook foods as fast as possible in order to serve more customers per hour. However, cooking foods slower is the only way to achieve a proper internal temperature. If your food products look acceptable on the outside, but have an internal temperature that is too low, then lowering the temperature and decreasing the belt speed (thereby increasing the cook time), will be necessary.

Several factors may affect the cooking performance and characteristics:

- Oven temperature (generally affects color)
- Conveyor speed (generally affects doneness)
- Finger arrangement
- Altitude
- Pans versus screens
- Dough thickness
- Cheese type
- Raw ingredient temperature (frozen?)
- Quantity of toppings

XLT ovens can be configured to cook a wide variety of food items. This is accomplished by arranging the fingers to control the baking characteristics. Generally speaking, most cooking is a “bottom up” process. The hot air from the bottom row of fingers has to go through the conveyor (a distance of about 2” / 50.8mm), heat the pan or screen, and then actually cook raw dough. The hot air from the top, on the other hand, basically only has to melt cheese and re-heat precooked toppings. Consequently, most operators will use the oven with the fingers arranged so that a lot more air is directed to the bottom of the pizza than to the top. There are places for an equal number of fingers above and below the conveyor. Available are finger cover plates that have six rows of holes, four rows of holes, two rows of holes, and no holes (or blank cover plates). A typical finger arrangement might have most or even all fingers on the bottom “full open”, that is fingers with all six rows of holes, and only two or three fingers on top with four or six rows of holes. The top fingers can be arranged in a symmetrical pattern or can be shifted asymmetrically to either the entrance or exit end of the conveyor. We encourage you to experiment by trying different finger arrangements, temperatures and belt speeds. XLT Ovens can assist you with your oven/product configurations.

Mechanical Function

If your oven does not function properly, please verify the following conditions:

- Verify that the power cord to the oven is connected and/or plugged in if equipped with a plug and receptacle.
- Check to see that the circuit breakers in the building electrical service panel have not been tripped or turned off.
- Check all circuit breakers on the oven control panel to ensure they have not been tripped.
- Ensure proper voltage, amperage, and wire size.

If your oven still does not function properly, XLT has qualified customer service personnel that can provide assistance on any type of XLT oven problem you may experience. Customer Service is available 24/7/365 at 888-443-2751, or visit www.xltovens.com.


**DANGER**

Check all local codes prior to installation. Special requirements may be necessary depending upon building material construction. It is the installing contractor's responsibility to ensure that the structure the hood is to be hung from meets all codes and can carry the hood weight.

Purchaser's Responsibility

It is the responsibility of the purchaser:

- Thoroughly review the floor plans and specifications. The exact location of the oven must be determined before installing the hood.
- To unload, uncrate, assemble, and install the hood to its intended location.
- To ensure that electric utilities are installed on site in accordance with local building codes and with the specifications in this manual.
- To see that electric utilities are connected properly by a qualified installer using the proper hardware.
- To ensure a qualified installer has performed an initial start-up procedure.
- Location should minimize long and twisted duct runs. Make efforts to have a straight clear path to the roof fan curb.
- All hood supporting structures must be strong enough to support the weight of the hood and shrouds. Refer to the Hood Dimensions & Weights page for weight.
- Maintain the proper clearances from combustible materials according to International Mechanical code (IMC), and National Fire Protection Agency (NFPA) 96, and local mechanical codes.
- To Ensure that the AVI Hood is suspended properly from the ceiling structure.

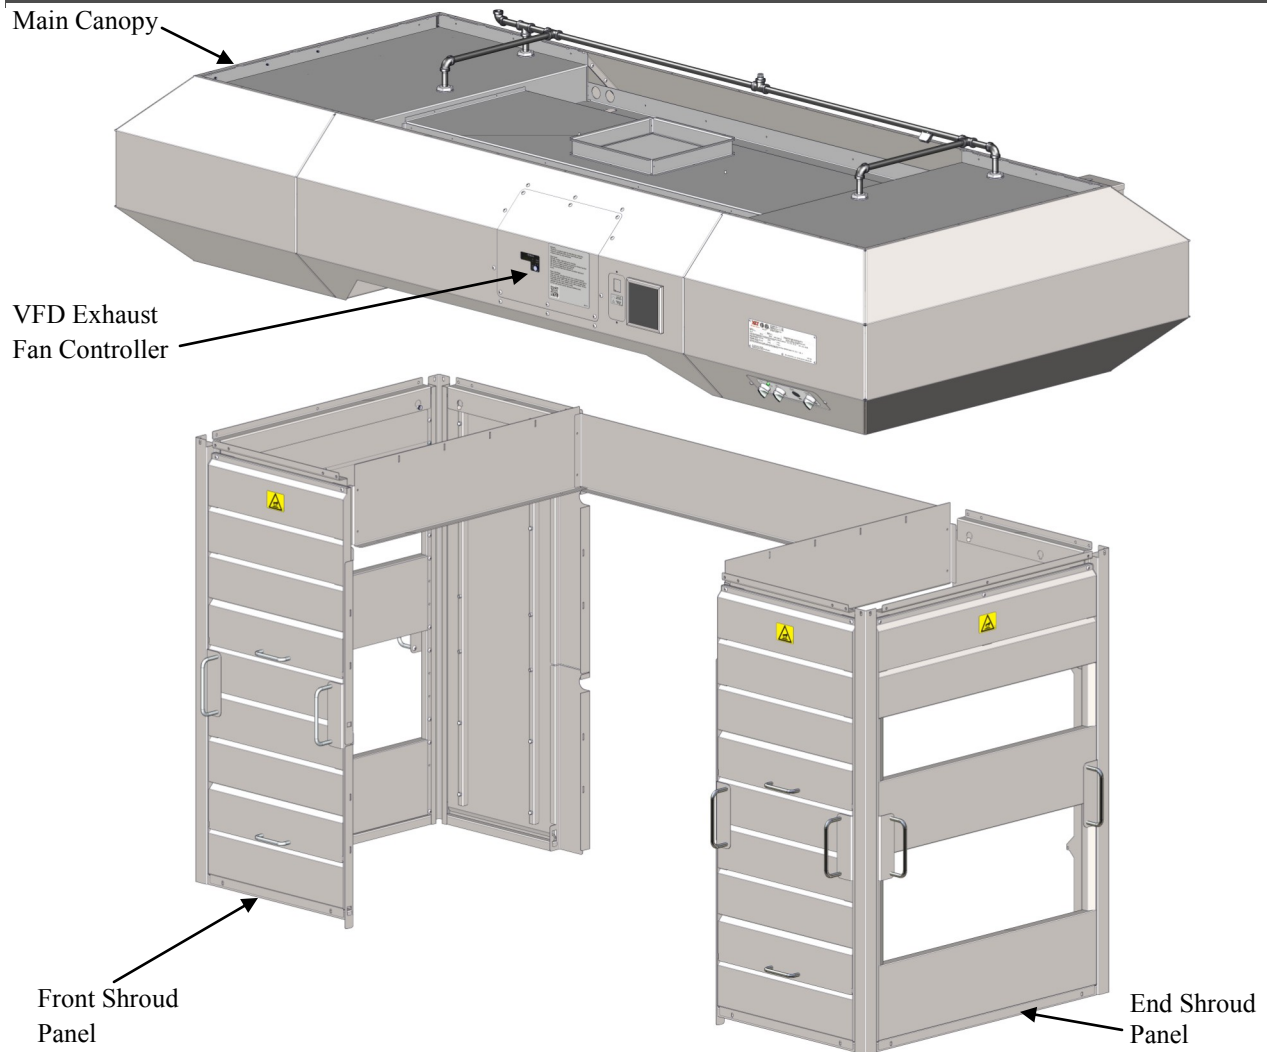

The AVI Hood System consists of three (3) major parts; the Main Canopy, the Shrouds, and the Variable Frequency Drive (VFD) exhaust fan controller.



The Main Canopy serves to collect and transmit heat to the exhaust fan. It houses filters, lights, and switches. The switches control both the hood and ovens. The main canopy size is dependent upon oven size.

The Shrouds assist the efficiency of the main canopy by entrapping heat. They are configurable for either side or end loading or unloading, and are easily removable for cleaning and maintenance.

The VFD converts input power to variable frequency three-phase output power to control the speed of the exhaust fan. All electric utilities for the hood and exhaust fan connect through the electrical box located on the rear of main canopy. The operator switches are located on the control panel on the front of main canopy, and interlock the function of the hood and oven(s). There are optional relays that provide interlocks for equipment such as, fire suppression, HVAC dampers, and/or dedicated MUA units.

All AVI hoods are available pre-piped for fire suppression, allowing for simple, in-field installations.

The AVI hood was designed to conform to the requirements of IMC 2009, which is a Type I hood. It was also designed to have optional fire suppression added to meet requirements of NFPA 96 standard. This was done to allow XLT to better service the requirements of the customer and the associated jurisdictions.

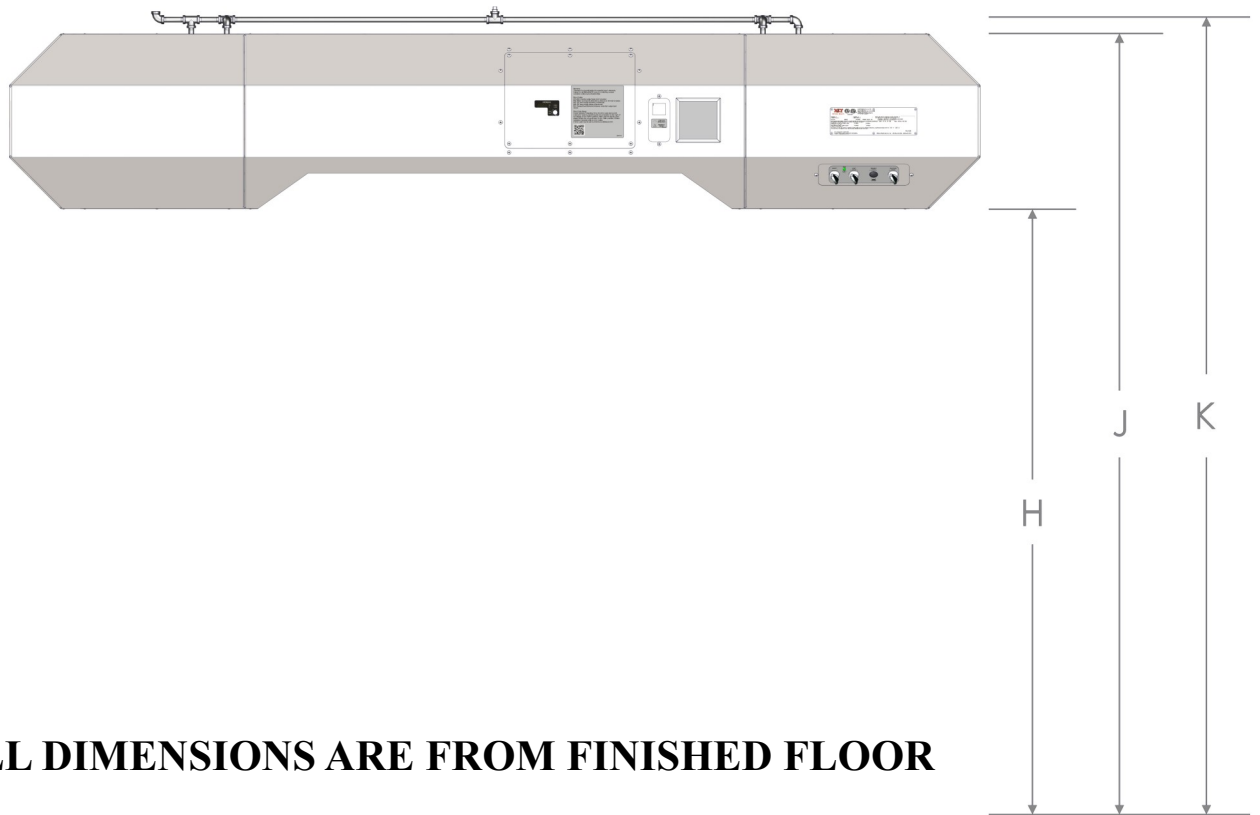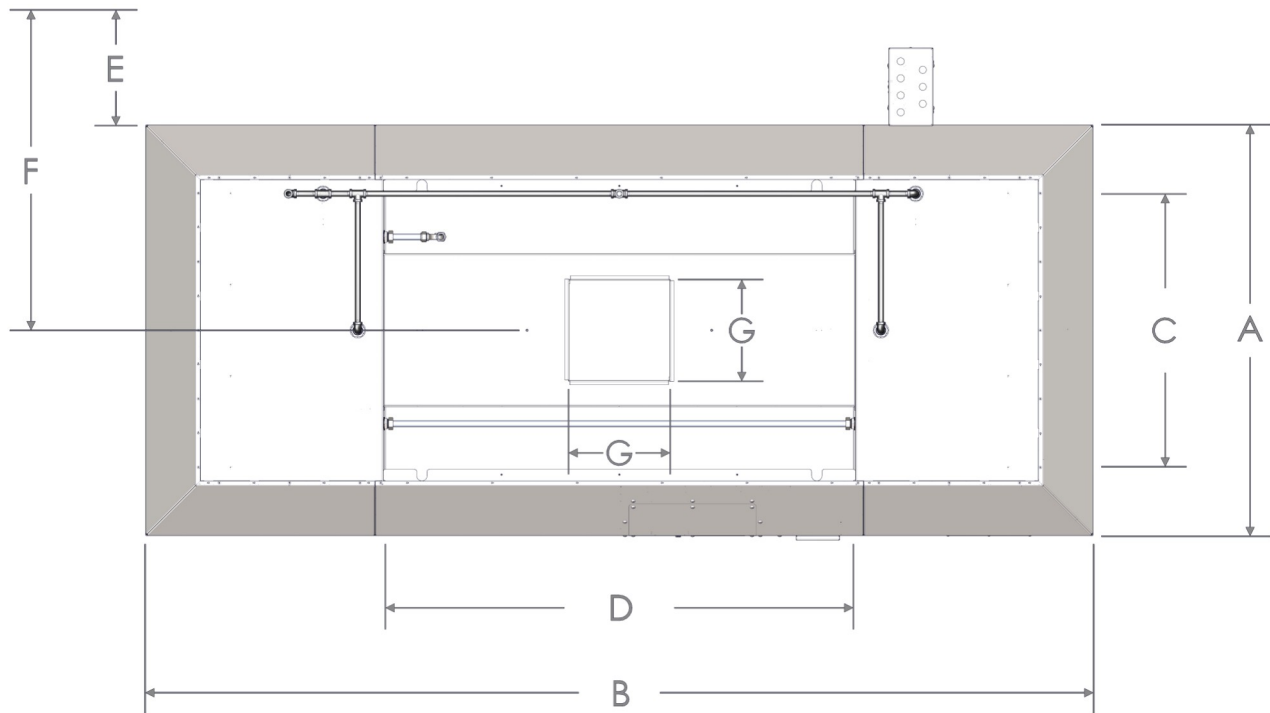

ALL DIMENSIONS ARE FROM FINISHED FLOOR

Oven Model	Hood Dimensions										Hood Weights		
	A	B	C	D	E	F	G	H	J	K	Single	Double	Triple
1832	34 3/8 [873]	88 5/8 [2251]	18 [457]	32 [813]	13 1/2 [343]	30 5/8 [778]	12 [305]	69 5/8 [1768]	89 7/8 [2283]	91 3/4 [2330]	540 [245]	500 [227]	525 [238]
1855	34 3/8 [873]	111 5/8 [2835]	18 [457]	55 [1397]		30 5/8 [778]					615 [279]	565 [256]	590 [268]
2440	40 3/8 [1026]	96 5/8 [2454]	24 [610]	40 [1016]		33 5/8 [854]					620 [281]	570 [259]	595 [270]
3240	48 3/8 [1229]	96 5/8 [2454]	32 [813]	40 [1016]		37 5/8 [956]					680 [308]	630 [286]	655 [297]
3255	48 3/8 [1229]	111 5/8 [2835]	32 [813]	55 [1397]		37 5/8 [956]					740 [336]	670 [304]	695 [315]
3855	54 3/8 [1381]	111 5/8 [2835]	38 [965]	55 [1397]		40 5/8 [1032]					795 [361]	720 [327]	745 [338]



All dimensions in inches [millimeters], ± 1/4 [6], unless otherwise noted.
 All weights in pounds [kilograms] unless otherwise noted.

Exhaust Flow Rates VOLUME (min. recommended)							
	Switches On			18xx	24xx	32xx	38xx
	Top	Middle	Bottom				
Single	X			500	500	500	500
				[14.16]	[14.16]	[14.16]	[14.16]
Double	X			500	500	500	500
				[14.16]	[14.16]	[14.16]	[14.16]
	X		X	506	644	828	966
			[14.33]	[18.24]	[23.45]	[27.35]	
Triple	X			500	500	500	500
				[14.16]	[14.16]	[14.16]	[14.16]
	X	X		506	644	828	966
				[14.33]	[18.24]	[23.45]	[27.35]
	X		X	766	975	1254	1463
			[21.69]	[27.61]	[35.51]	[41.43]	
	X	X		506	644	828	966
				[14.33]	[18.24]	[23.45]	[27.35]
X		X	766	975	1254	1463	
			[21.69]	[27.61]	[35.51]	[41.43]	
X	X	X	766	975	1254	1463	
			[21.69]	[27.61]	[35.51]	[41.43]	

**NOTE**

All values are CFM [M3/Min] unless otherwise noted. Figures represent TOTAL VOLUME measured at the duct.

In accordance with mechanical codes, make up air must be supplied. For commercial kitchen make up air, the amount is determined by the exhaust hood flow rate requirements & all other exhaust flow rate requirements in the kitchen.

At a minimum, smoke candles must be used for a Capture & Containment (C&C) test. Refer to the Ventilation Requirements disclosed in the Oven section in this manual.

A Test & Balance (TAB) report is recommended after installation has been completed. Below are the minimum items to be included in this report:

- Total airflow on all A/C, Make-Up Air (MUA), & exhaust systems.
- Airflow on each supply & exhaust grille.
- Airflows on exhaust hoods compared to design specifications.

A final air balance report, with any corrections of issues found in the report, will help to insure that your building systems are functioning properly & efficiently.

[Refer to “Oven Ventilation Requirements & Guidelines”](#)

Exhaust Flow Rates VELOCITY (min. recommended)							
	Switches On			18xx	24xx	32xx	38xx
	Top	Middle	Bottom				
Single	X			187.5	187.5	93.75	93.75
				[57.15]	[57.15]	[28.58]	[28.58]
Double	X			187.5	187.5	93.75	93.75
				[57.15]	[57.15]	[28.58]	[28.58]
	X		X	189.75	241.5	155.25	181.125
			[57.84]	[73.61]	[47.32]	[55.21]	
Triple	X			187.5	187.5	93.75	93.75
				[57.15]	[57.15]	[28.58]	[28.58]
	X	X		189.75	241.5	155.25	181.125
				[57.84]	[73.61]	[47.32]	[55.21]
	X		X	287.25	365.625	235.125	274.3125
			[87.55]	[111.44]	[71.67]	[83.61]	
	X	X		189.75	241.5	155.25	181.125
				[57.84]	[73.61]	[47.32]	[55.21]
X		X	287.25	365.625	235.125	274.3125	
		[87.55]	[111.44]	[71.67]	[83.61]		
X	X	X	287.25	365.625	235.125	274.3125	
			[87.55]	[111.44]	[71.67]	[83.61]	

NOTE All values are FPM [M/Min] unless otherwise noted. Figures represent VELOCITY measured at the Grease Filter.

NOTE Most building codes require 500 Feet per Minute velocity. Exhaust duct is 1 ft². Check with your local building official for requirements.

The VELOCITY readings above are obtained by holding an anemometer 3” away from the Grease Filter. Take several readings in different locations across the filters and average the results.


Inputs into Junction Box


AVI Hood Electric Utility Specifications			
	# of Circuits	Rating	Purpose
Standard	1	208/240 VAC, 1 Phase, 60 Hz, 3 Amp	VFD Controller
	1	120 VAC, 1 Phase, 60 Hz, 1 Amp	Lights
World	1	230 VAC, 1 Phase, 50 Hz, 3 Amp	VFD Controller
	1	230 VAC, 1 Phase, 50 Hz, 1 Amp	Lights

Outputs from Junction Box

The AVI Hood system provides:


- Three (3) switching outputs for HVAC dampers and dedicated units
- One (1) 230 VAC, 10 Amp, variable frequency, three phase power output for the ventilation exhaust fan.

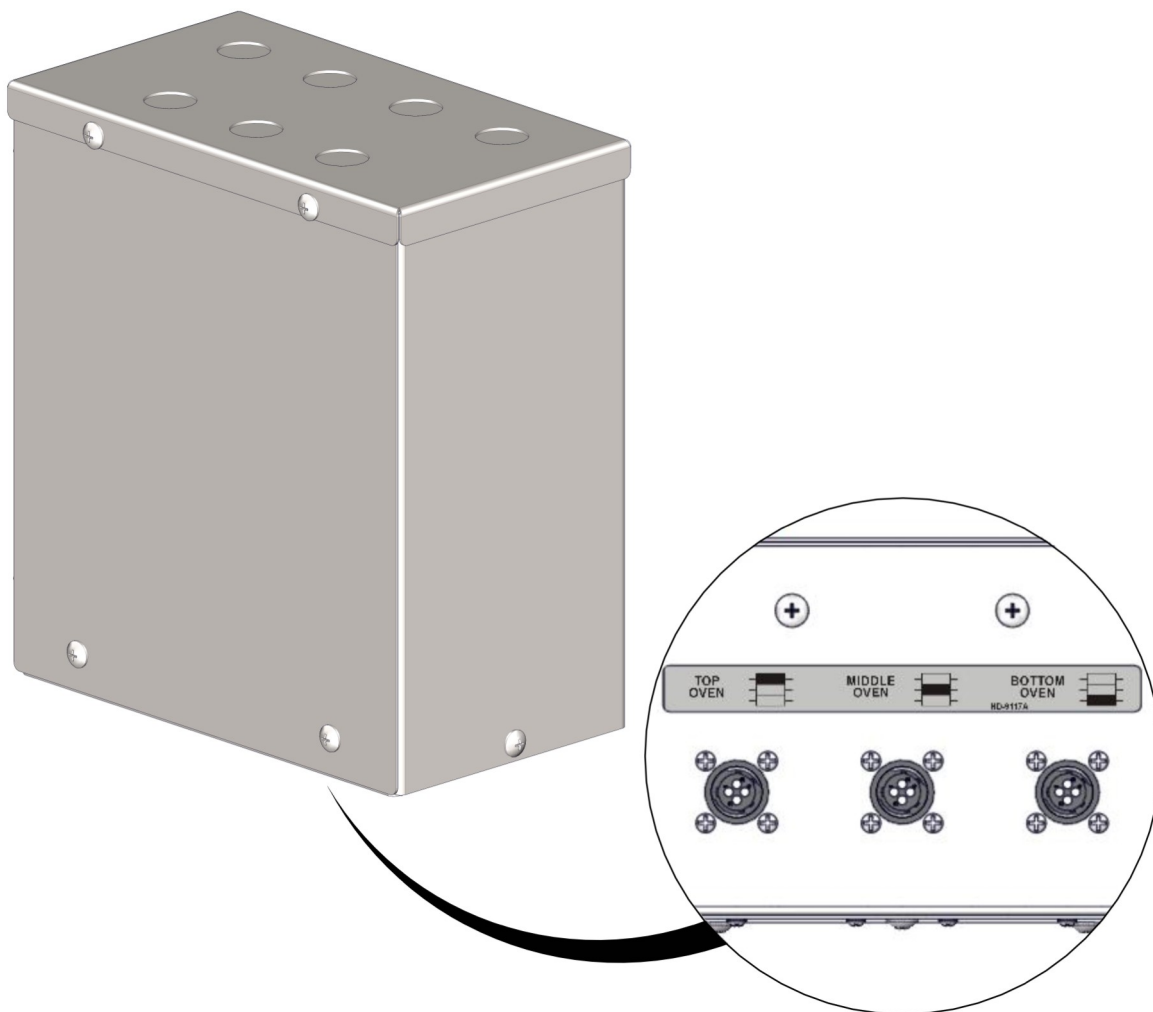

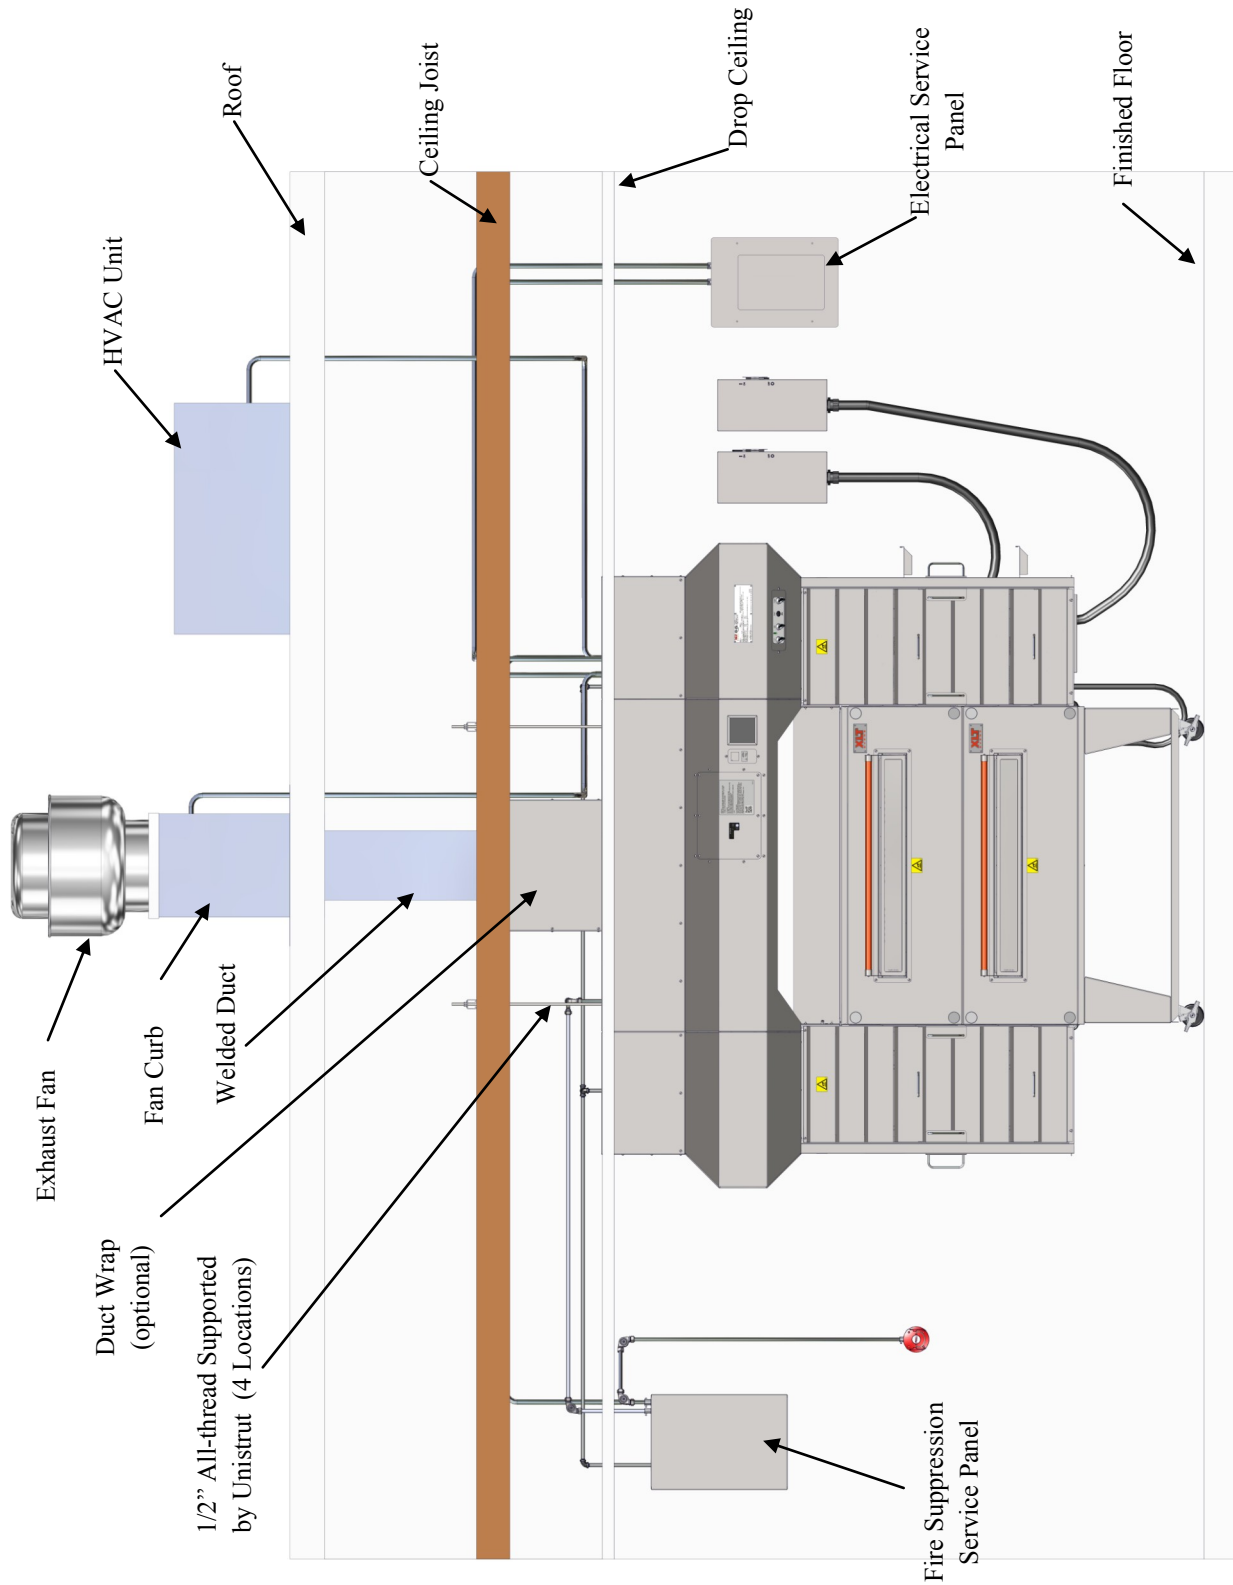


All structural members, electrical & fire suppression equipment shown for reference only.


VFD Control Box - Standard w/Fire Suppression

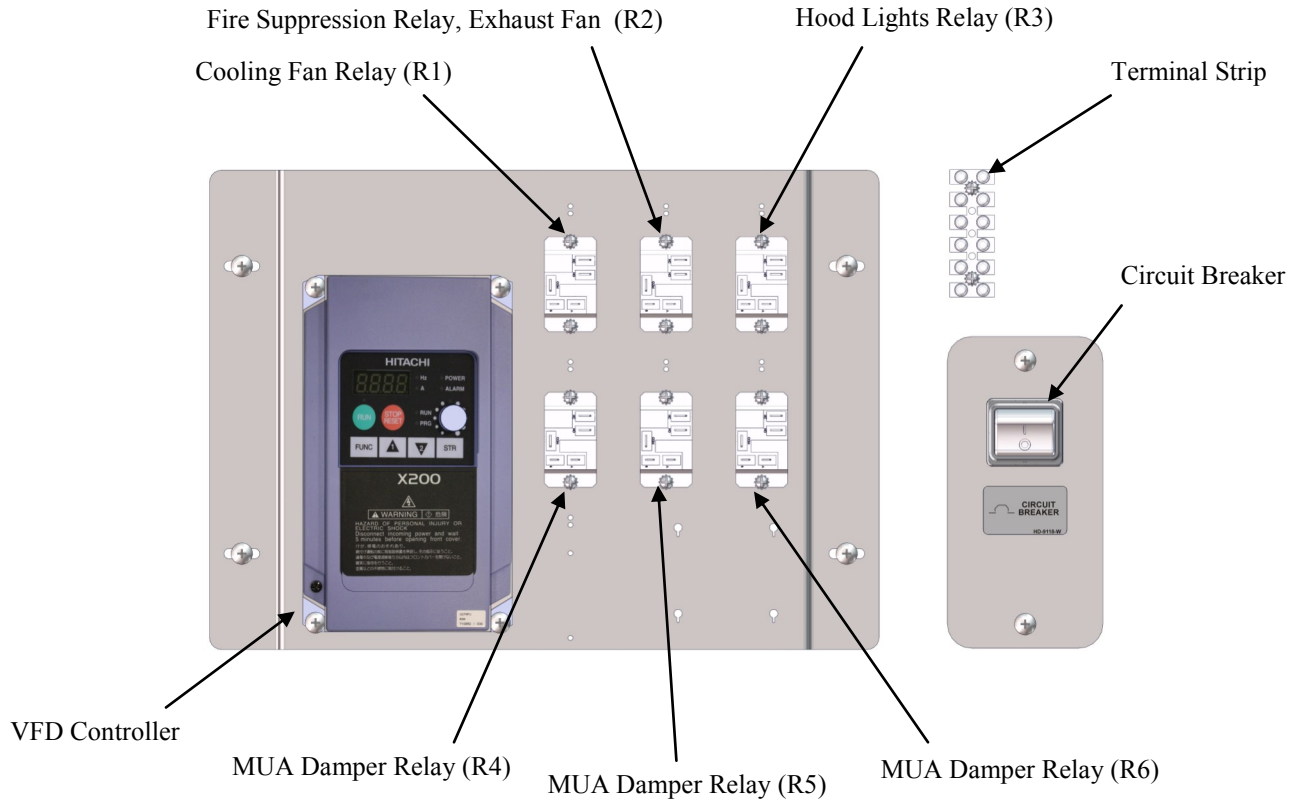

VFD Control Box - World w/Fire Suppression

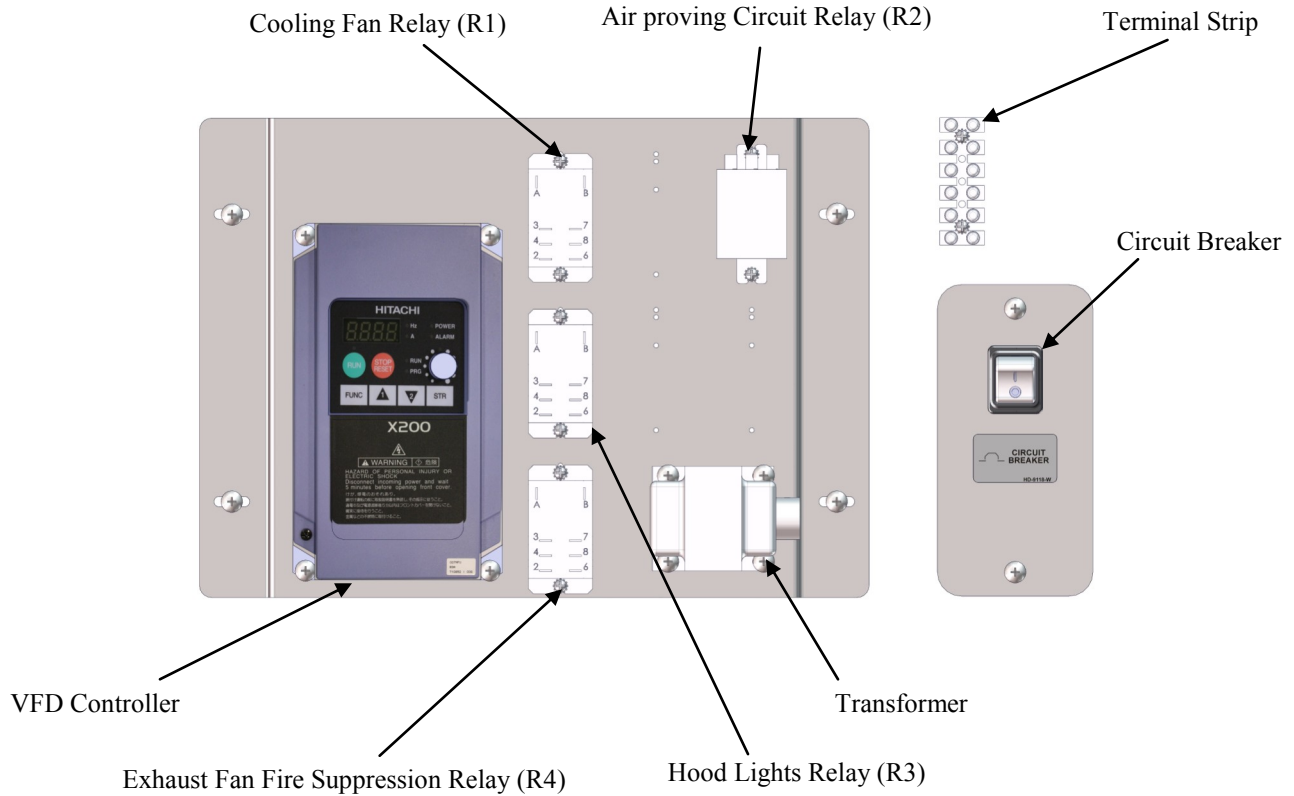


Input Power to Lights - Without VFD Controller

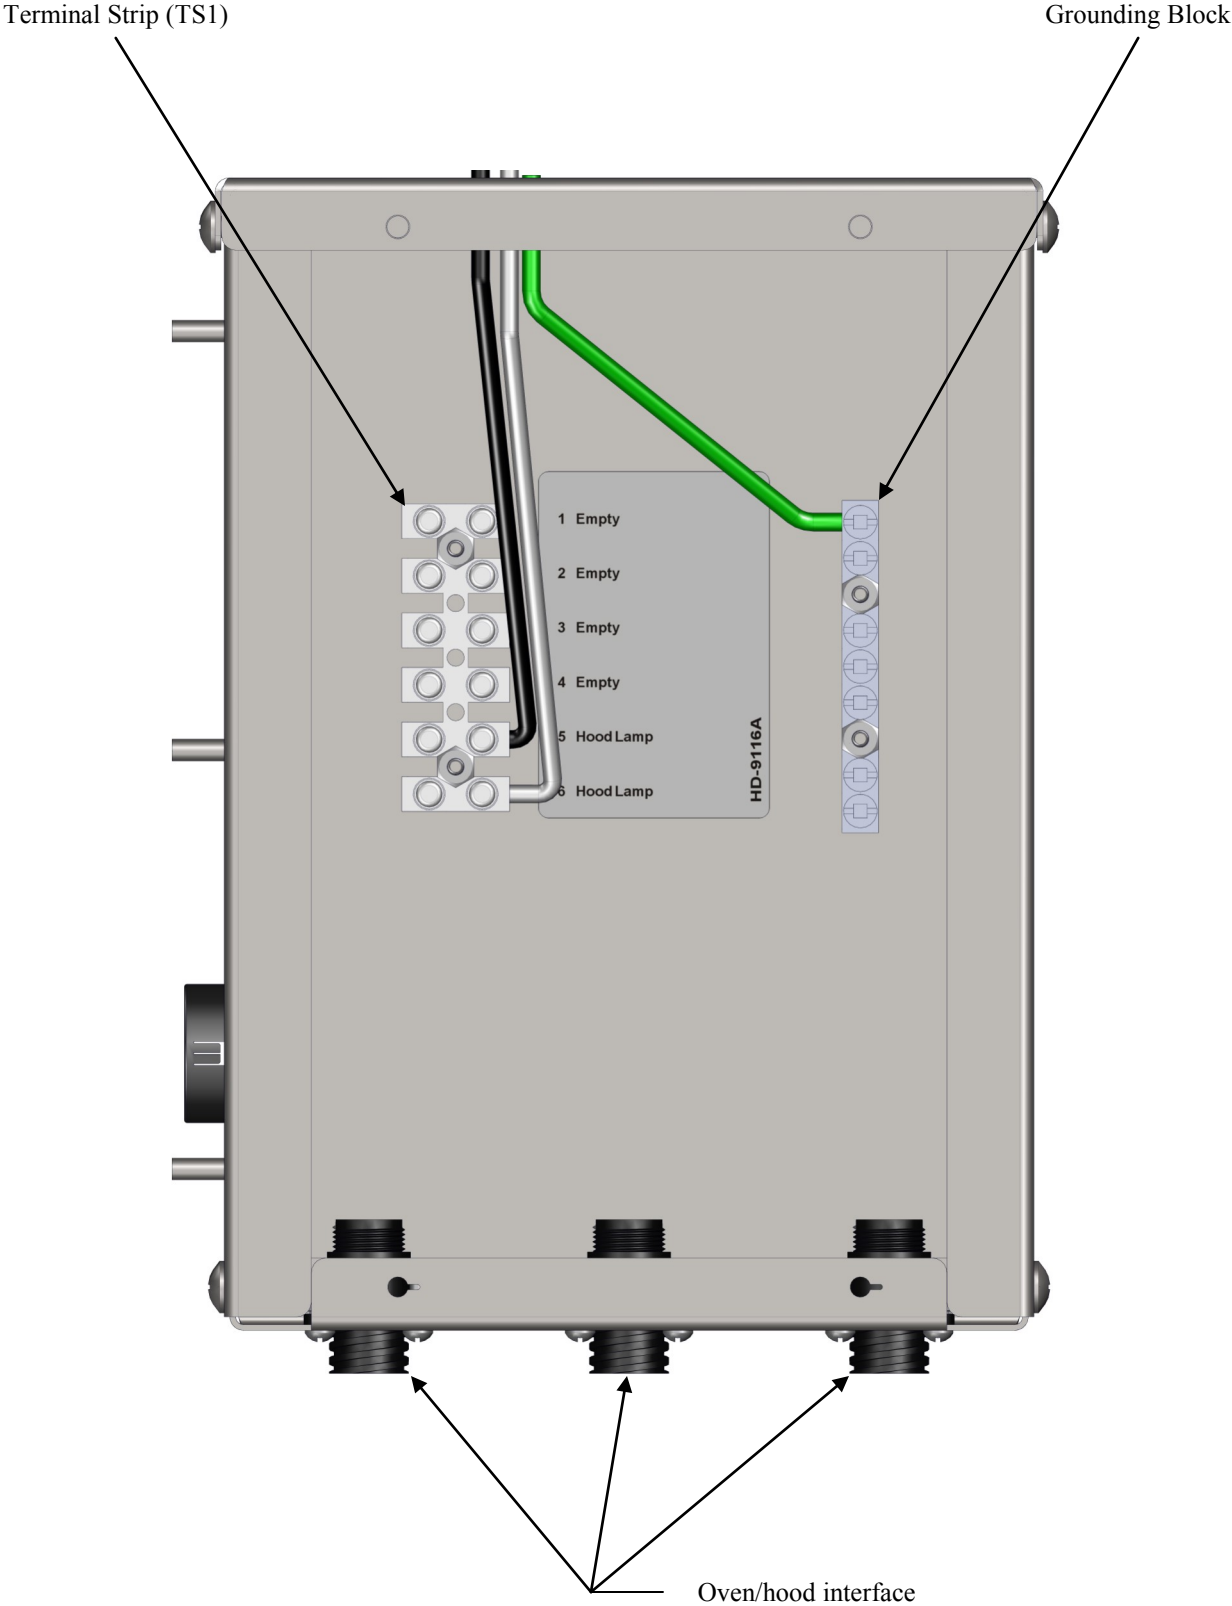


Non-VFD Control Box (Cover removed)


Input Power to Lights - Standard Voltage & Frequency

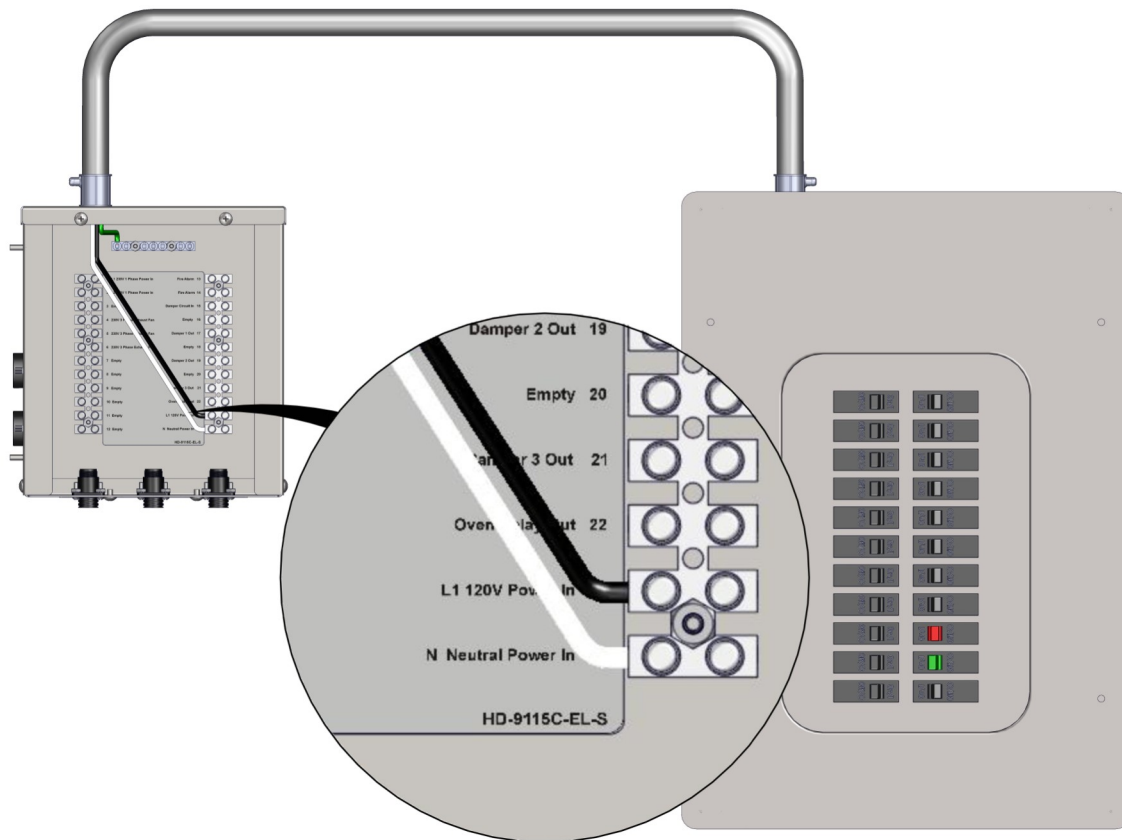


Input Power to Lights - World Voltage & Frequency

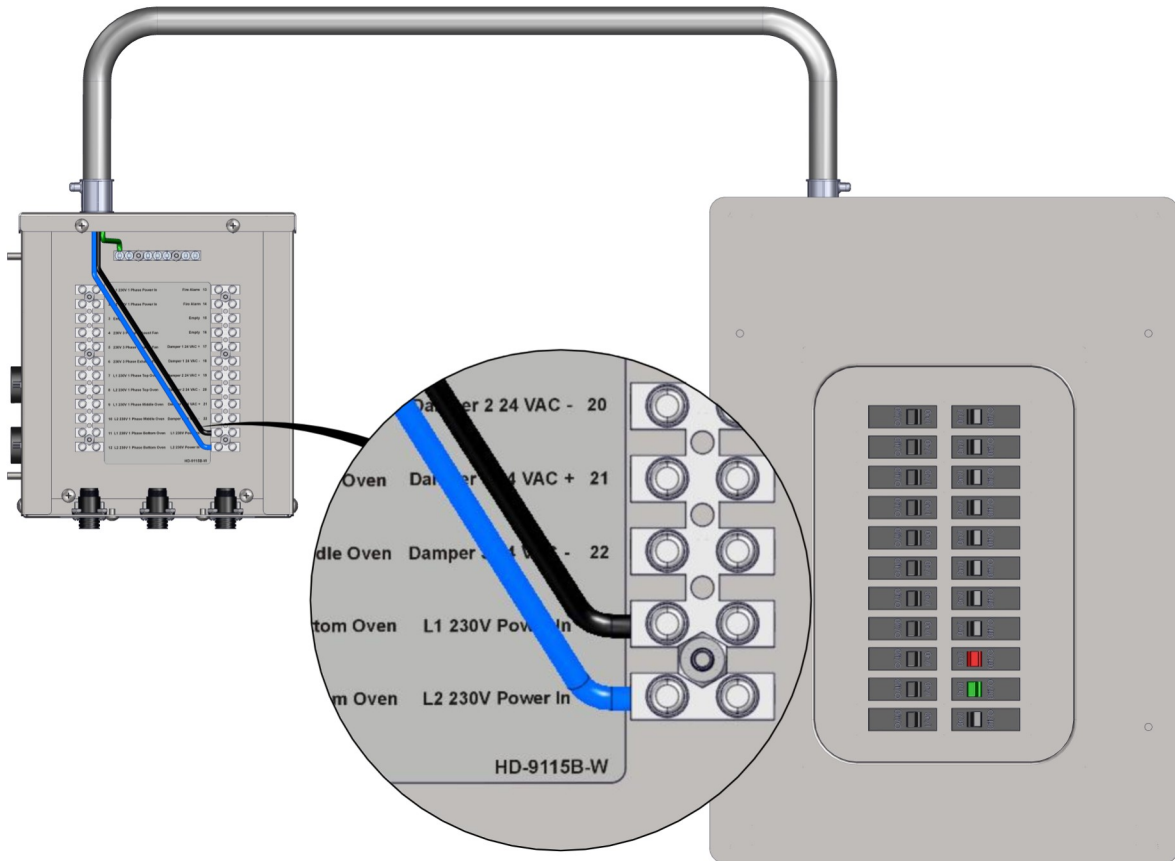


Input Power to VFD Controller - Standard Voltage & Frequency

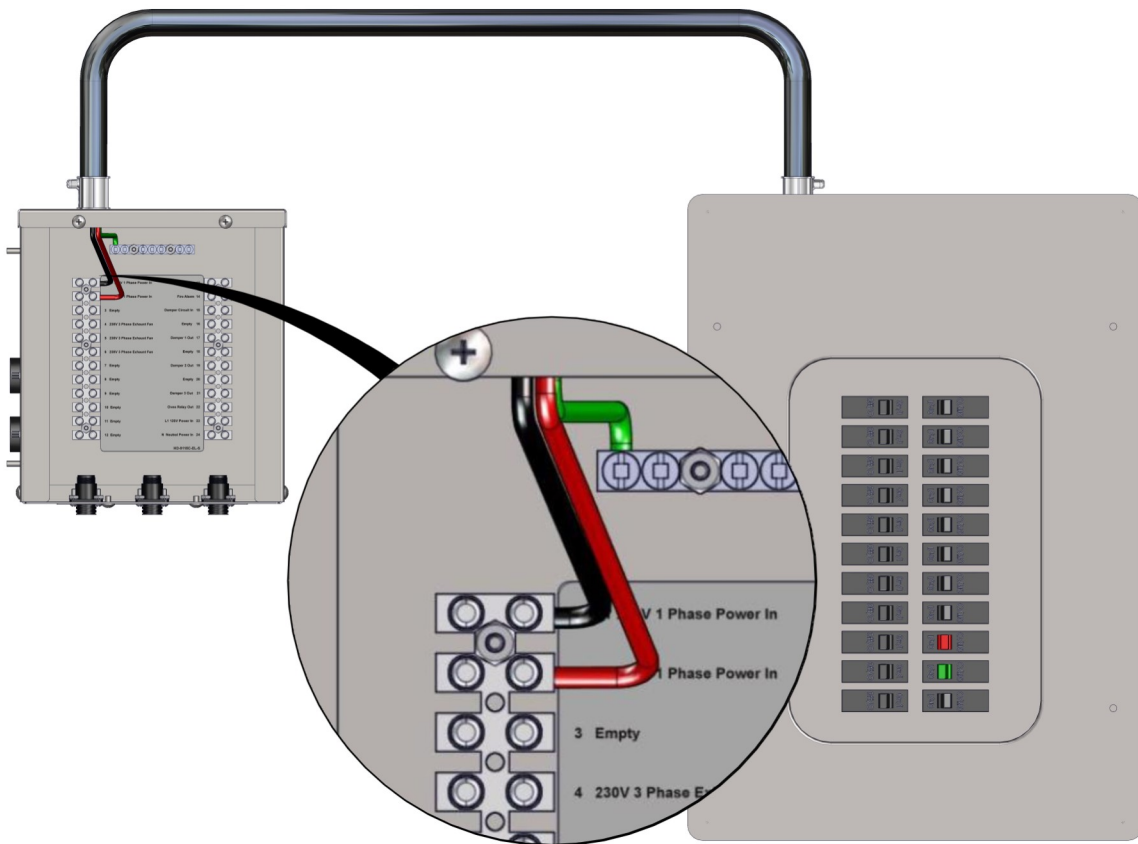


Input Power to VFD Controller - World Voltage & Frequency

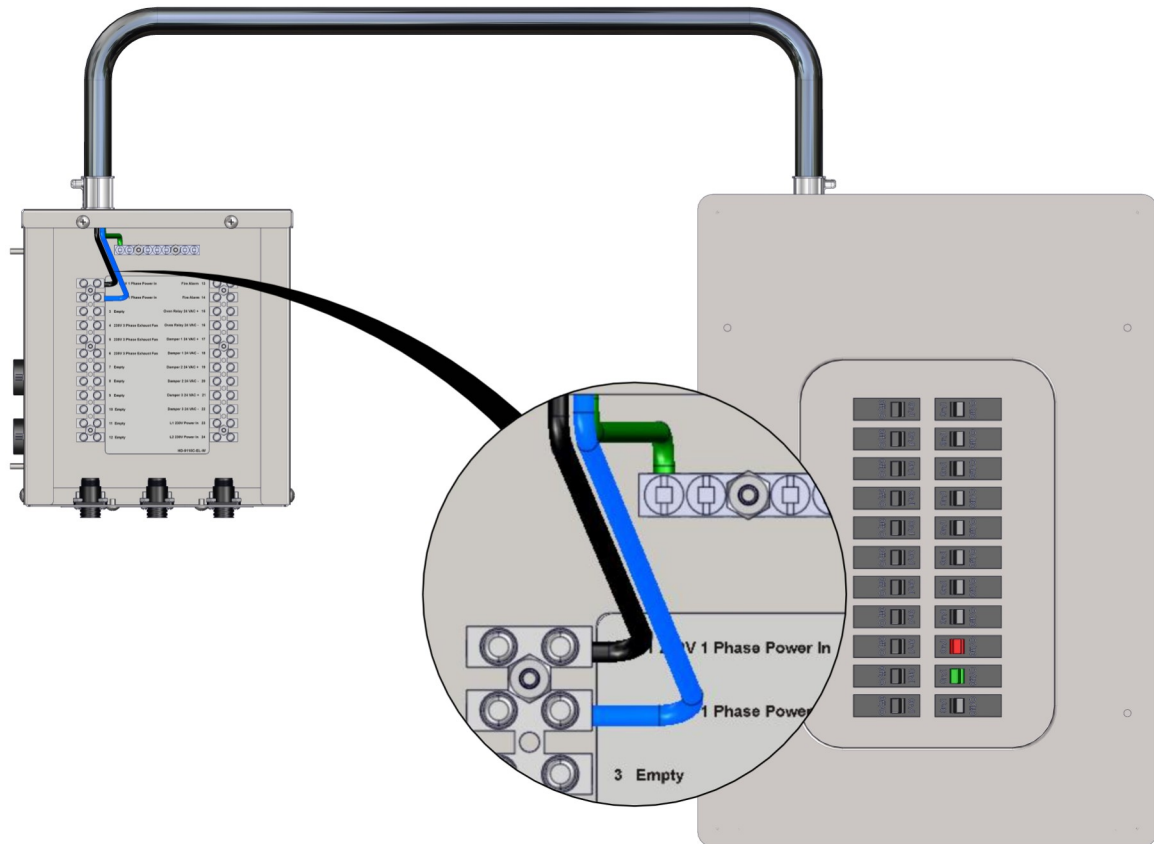


Power from VFD to Exhaust Fan - Standard Voltage & Frequency

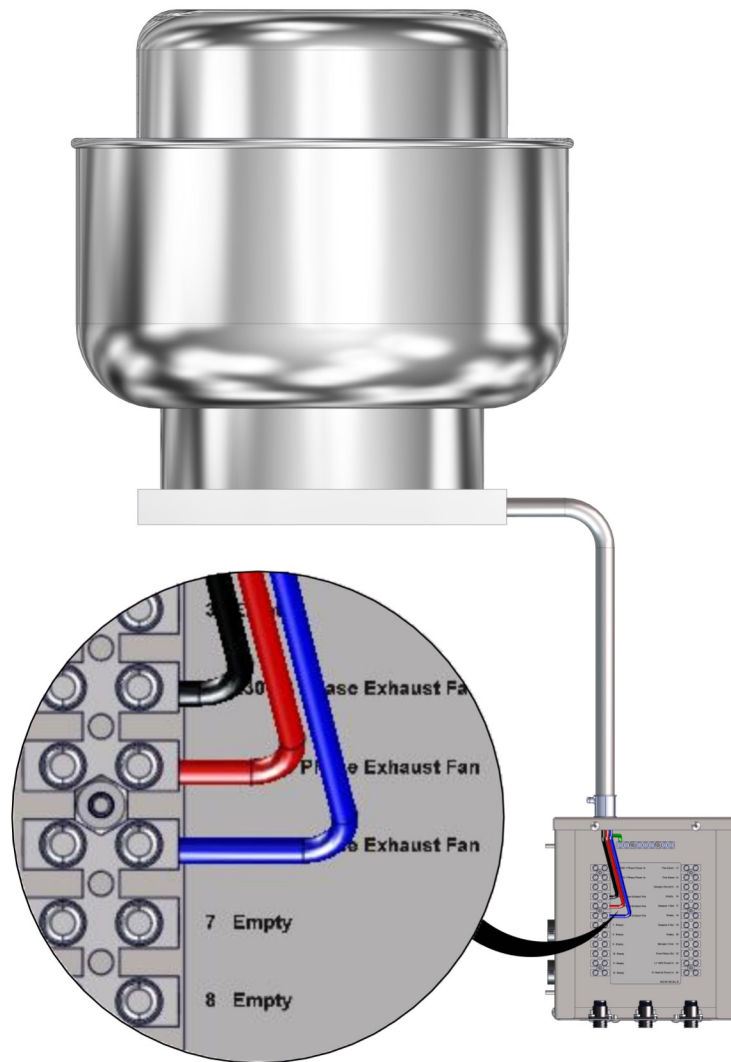

Power from VFD to Exhaust Fan - World Voltage & Frequency

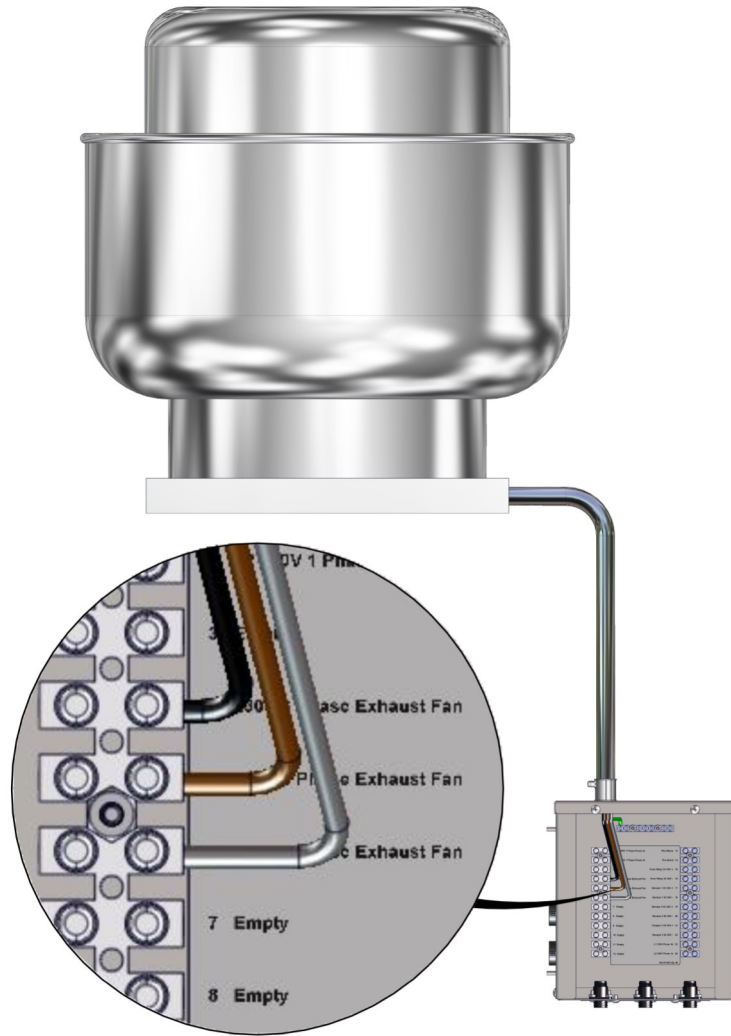


MUA Damper Relays - Single Output - Standard Voltage & Frequency

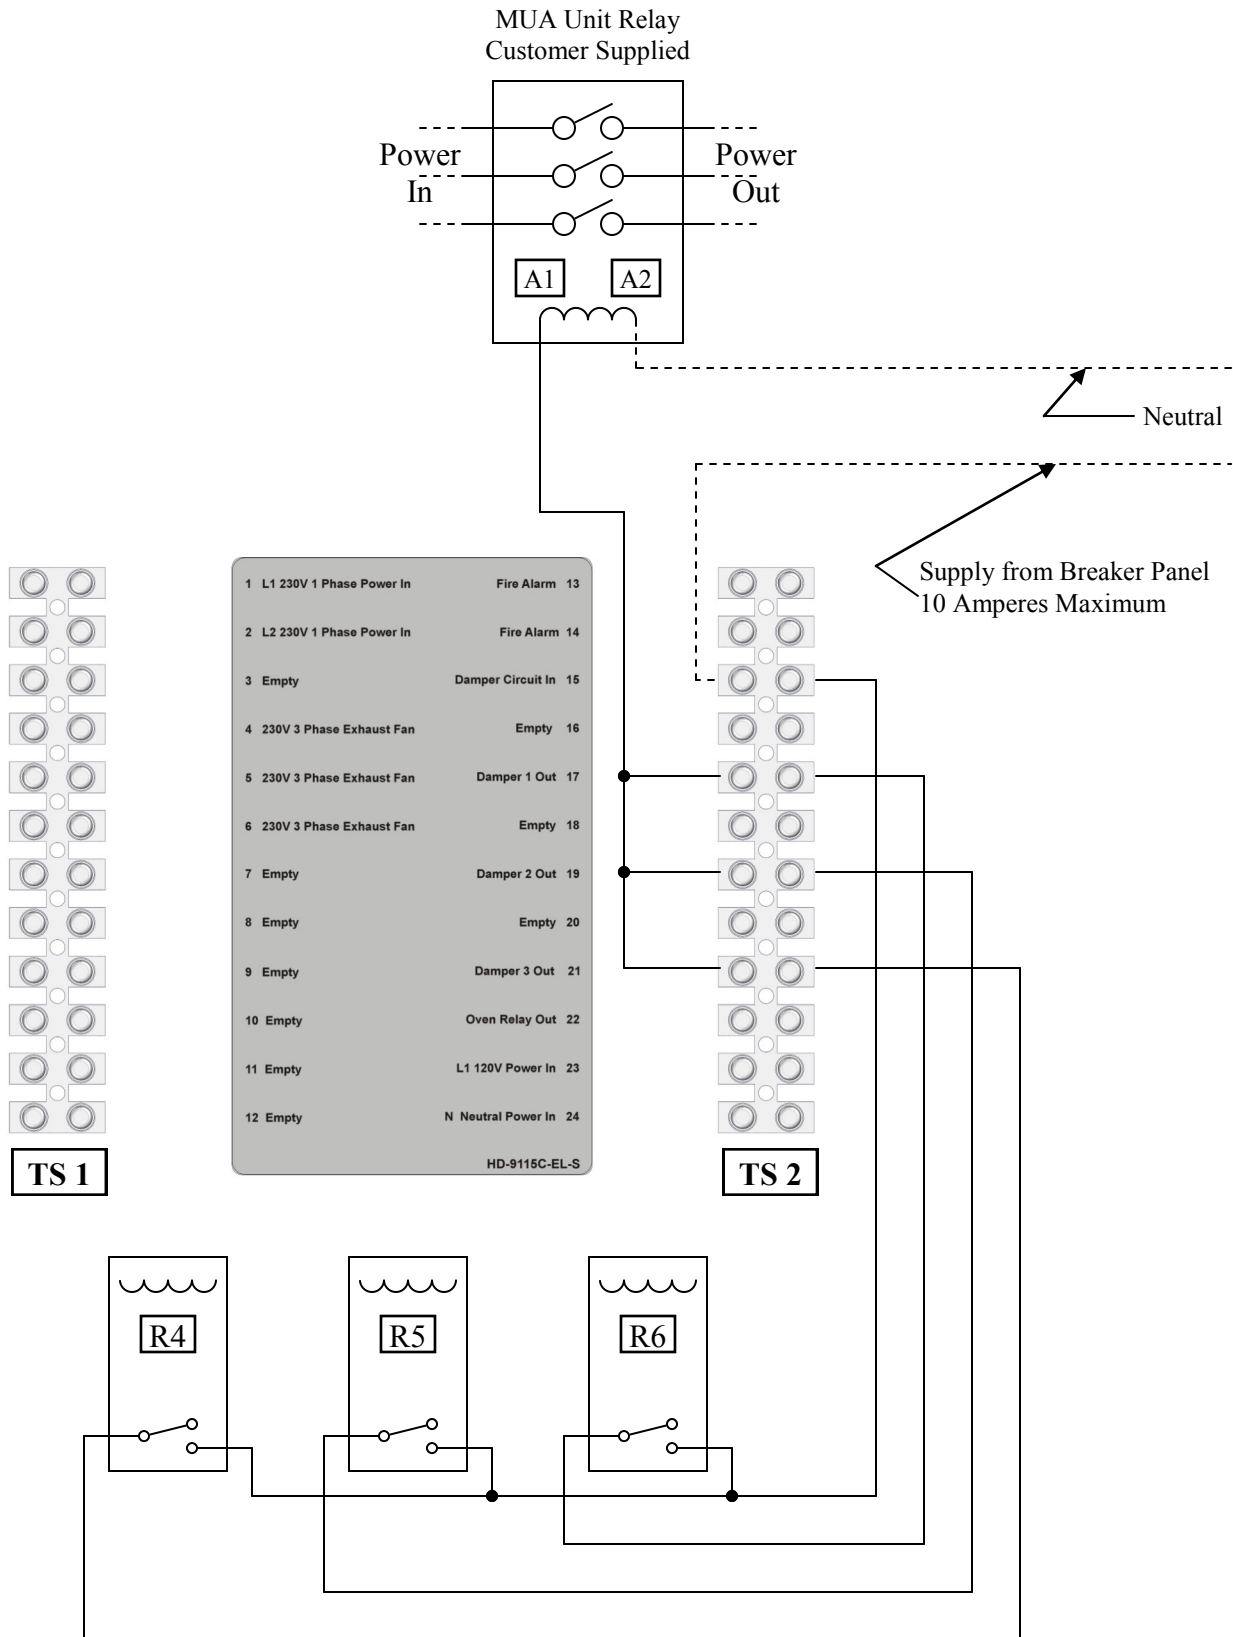


Some wiring removed for clarity. See schematic for details.

MUA Damper Relays - Single Output - World Voltage & Frequency

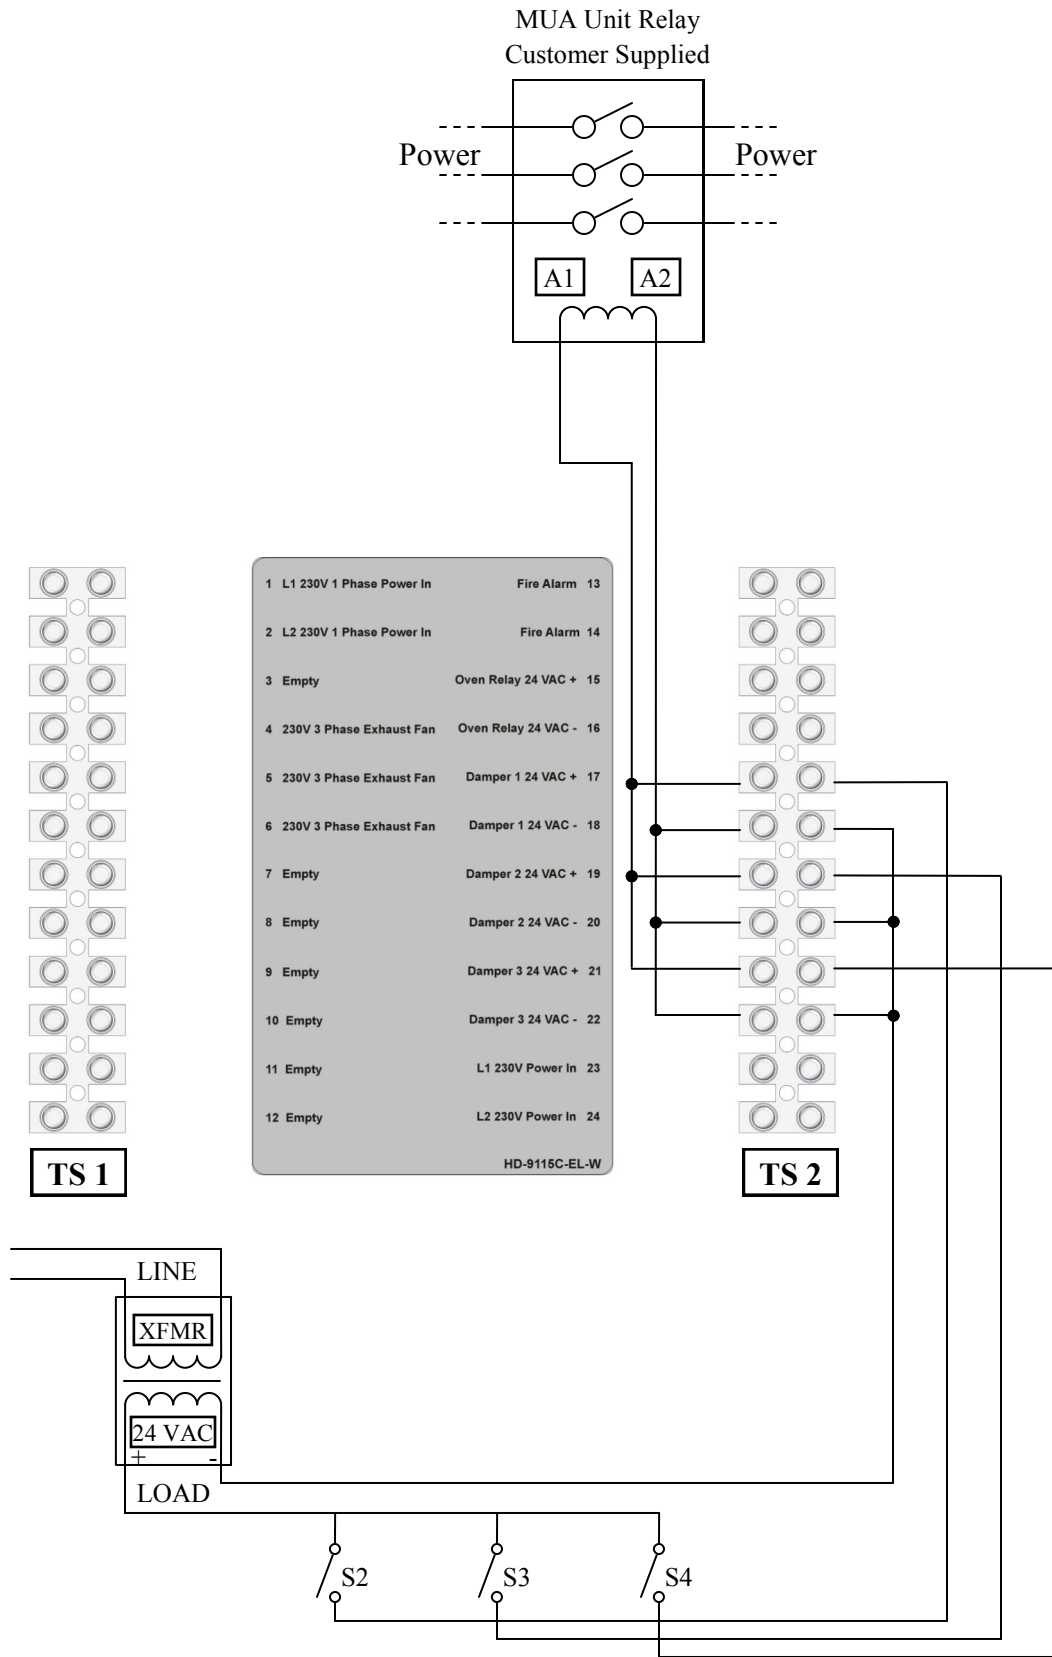


Some wiring removed for clarity. See schematic for details.

MUA Damper Relays - Multiple Output - Standard Voltage & Frequency

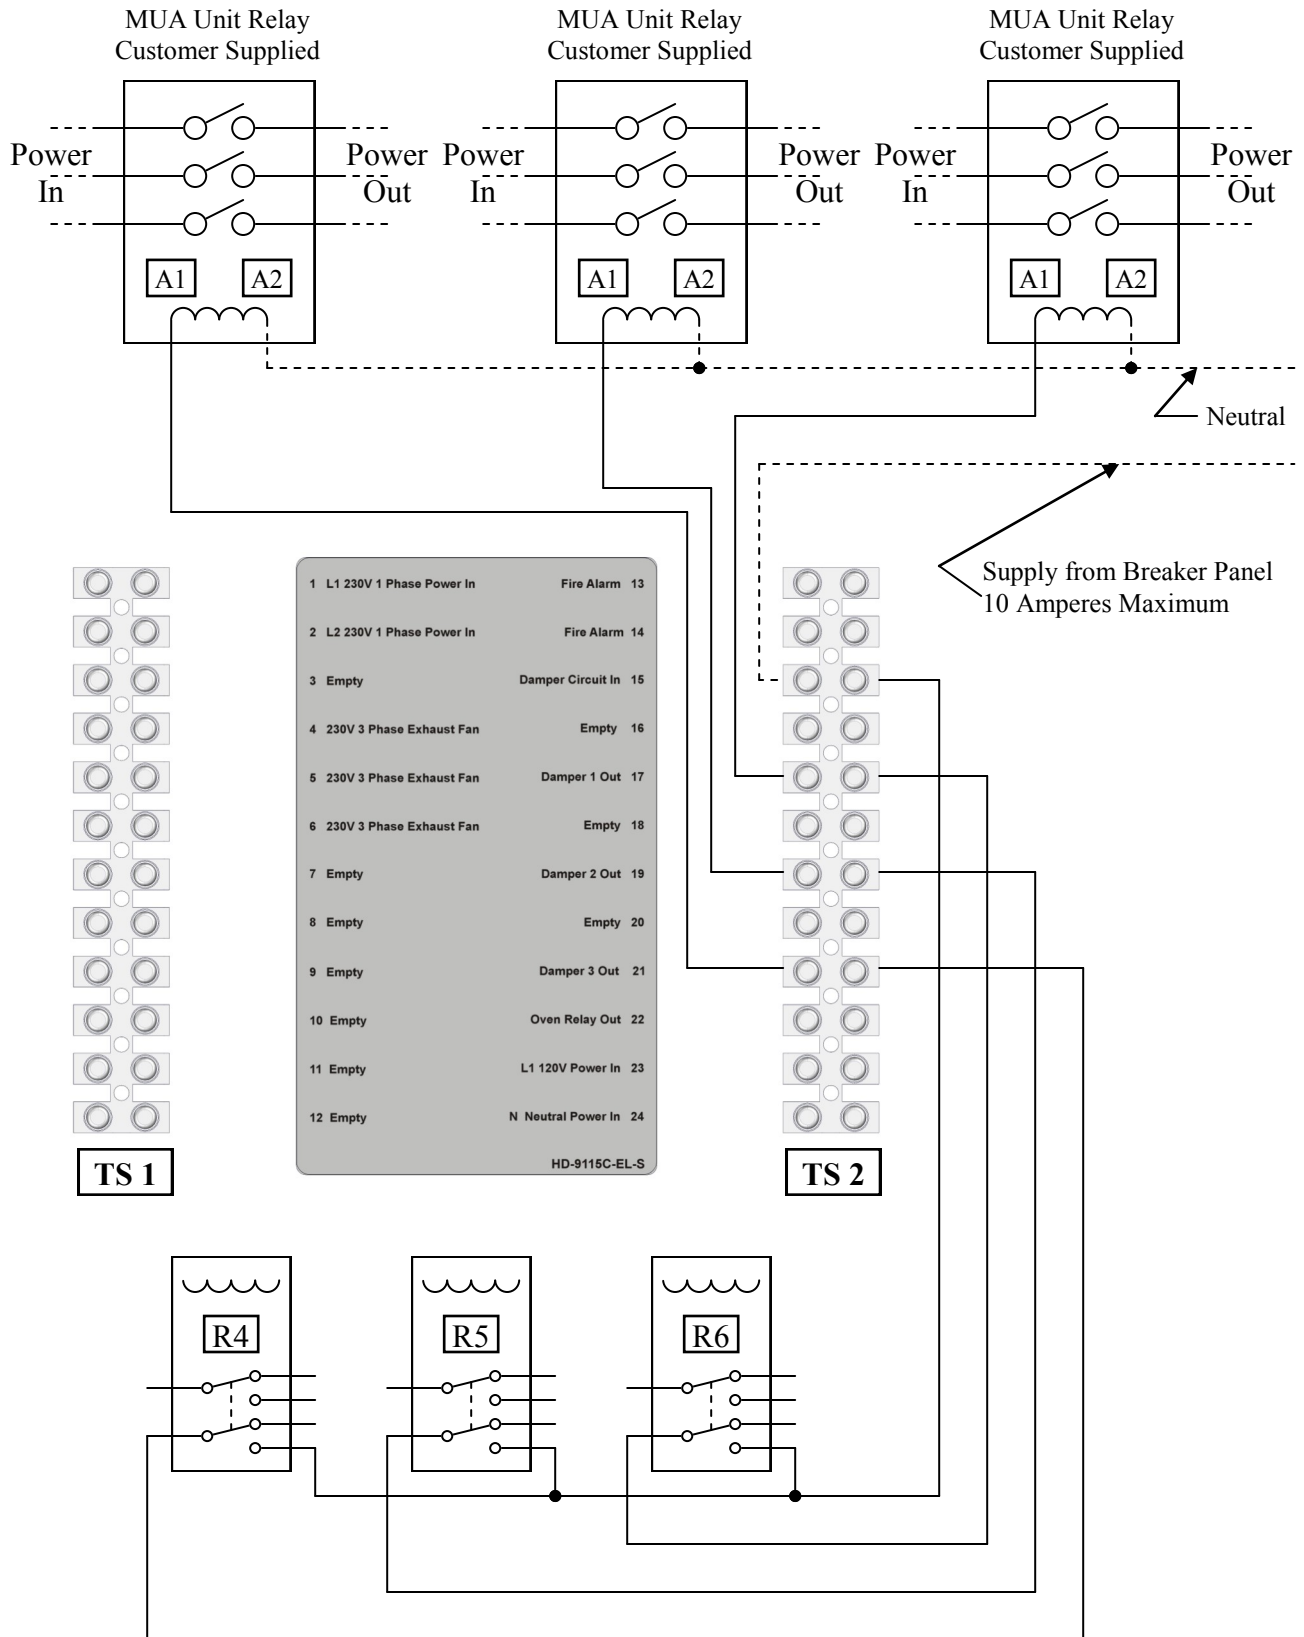


Some wiring removed for clarity. See schematic for details.

MUA Damper Relays - Multiple Output - World Voltage & Frequency

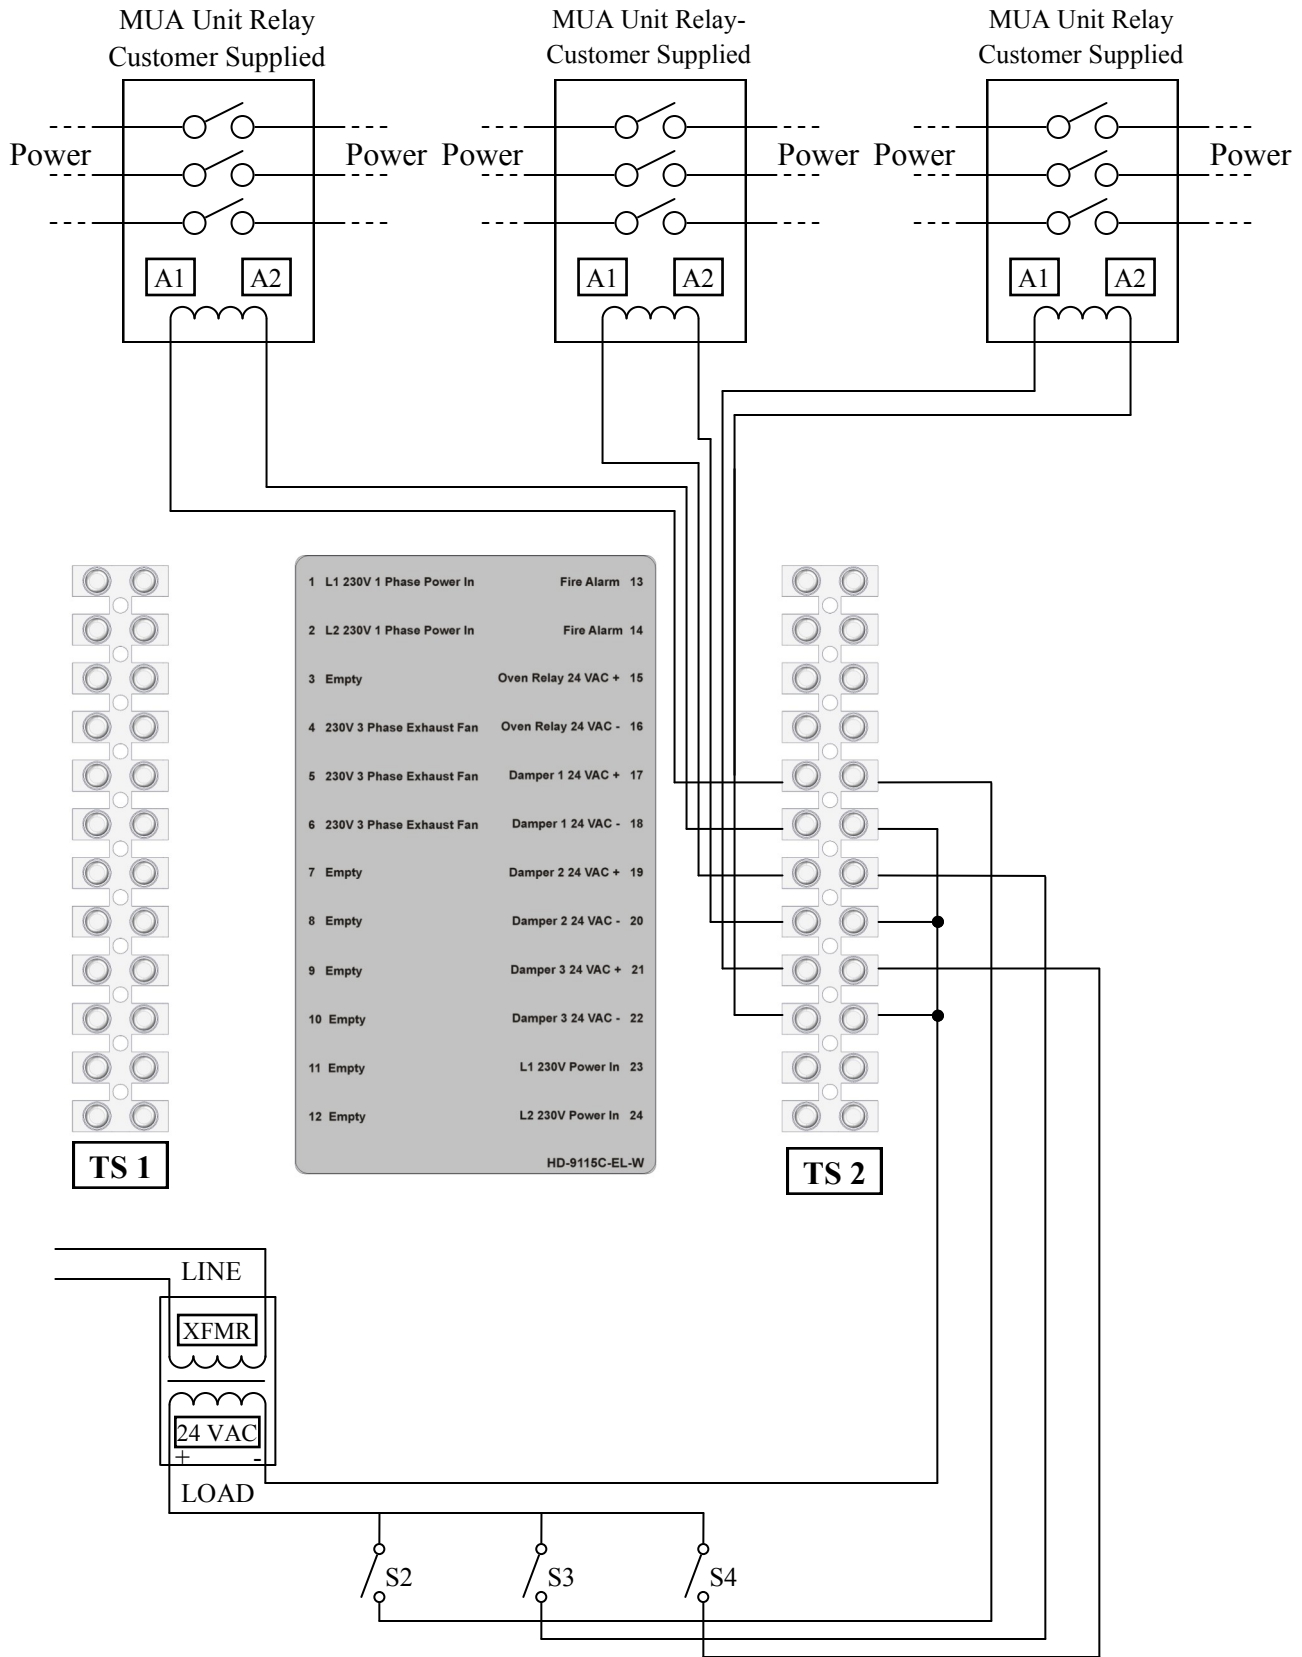


Some wiring removed for clarity. See schematic for details.


Fire Alarm Relay - Standard Voltage & Frequency


 Connect wires from the Junction Box to the Normally Open (NO) contacts in the Fire Suppression cabinet.

NOTE

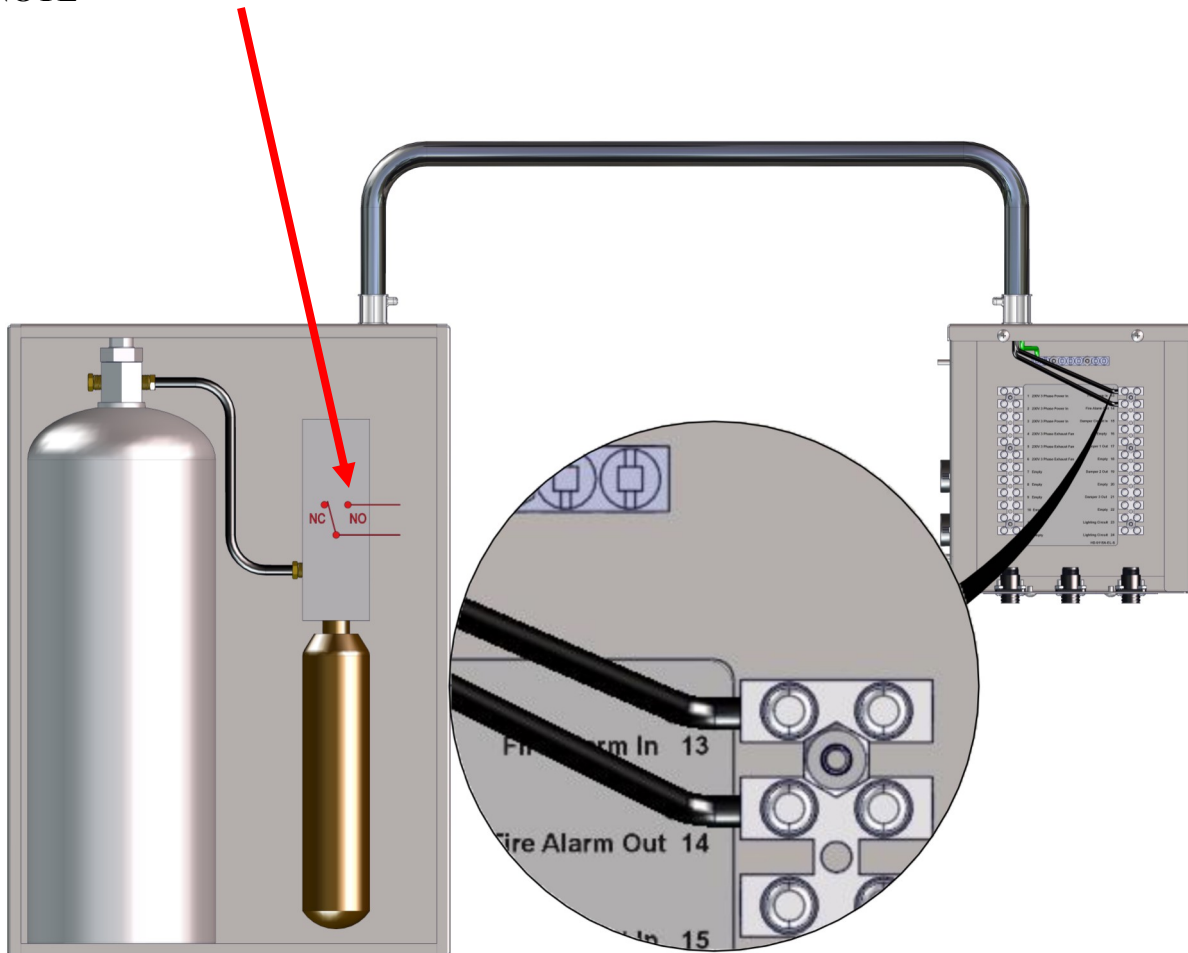


Fire Alarm Relay - World Voltage & Frequency


NOTE  Connect wires from the Junction Box to the Normally Open (NO) contacts in the Fire Suppression cabinet.

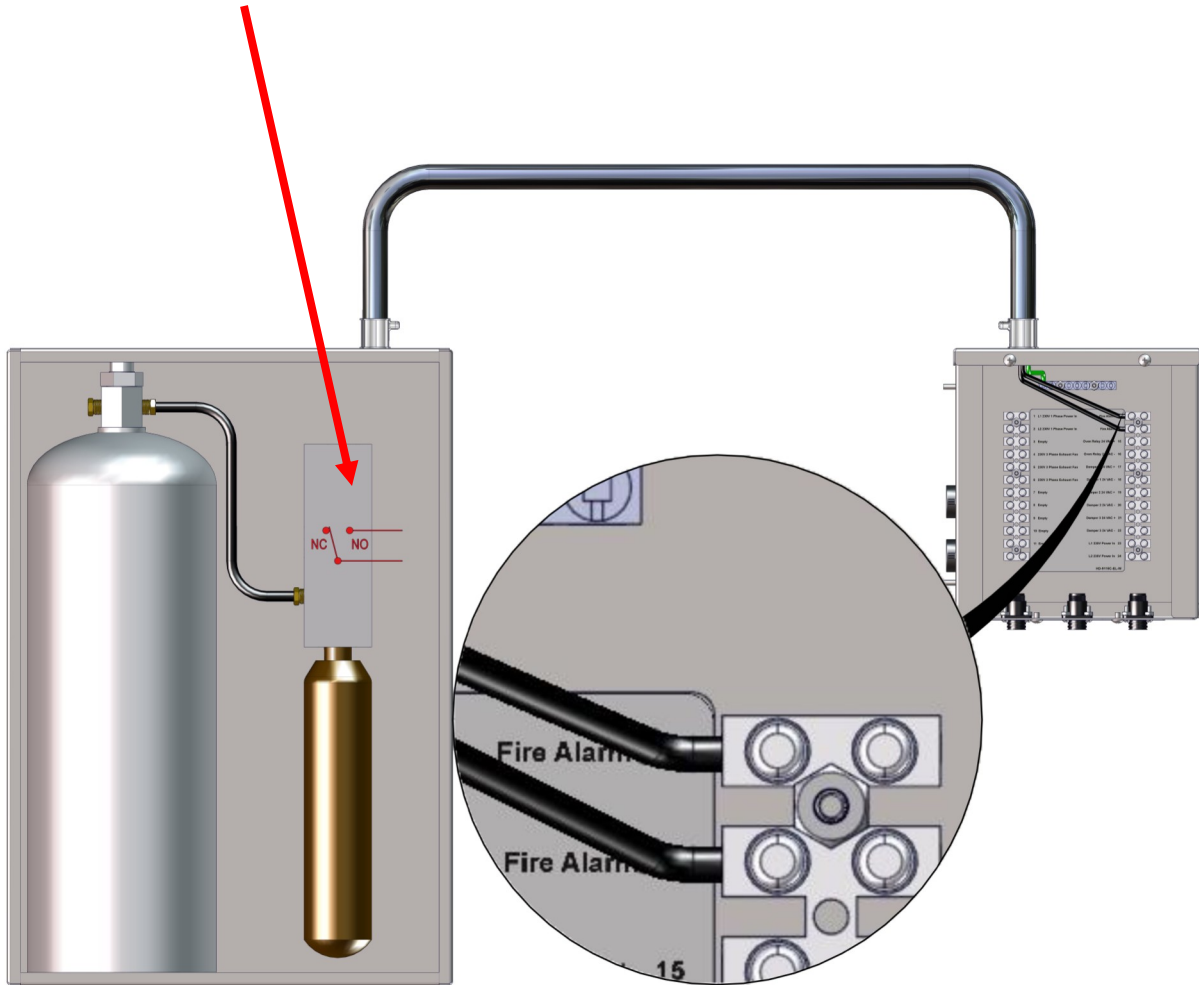

Prepare Ovens - Remove Lid Screws - Two (2) Only


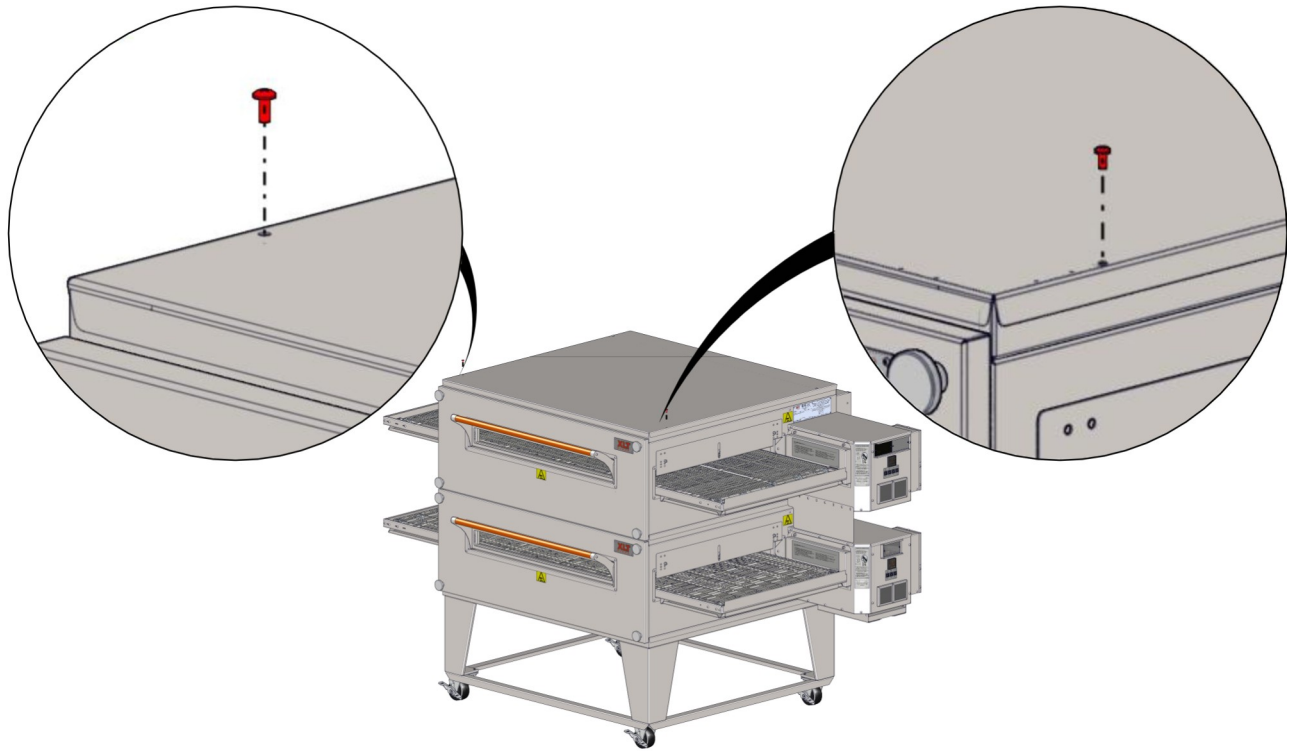


Prepare Ovens - Control Box Closeout Bracket

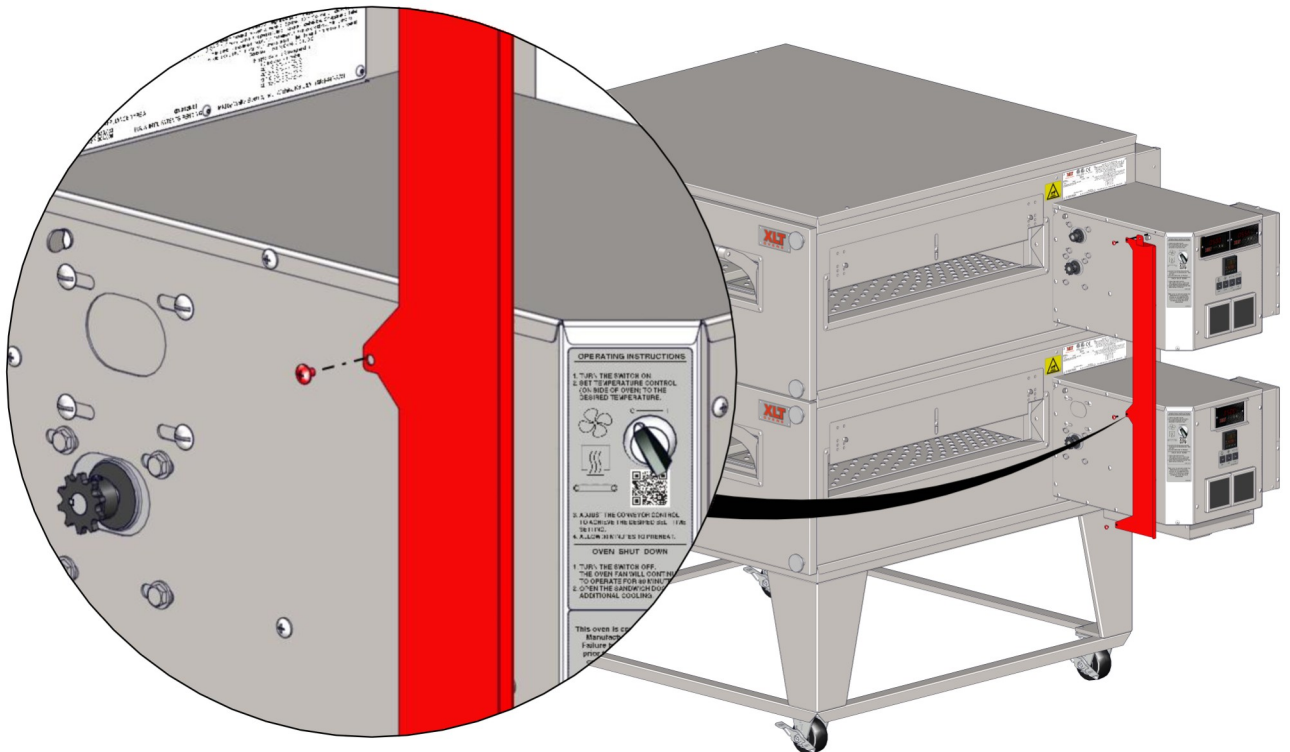


Conveyors have been removed for clarity


Prepare Ovens - Front Shroud Brackets

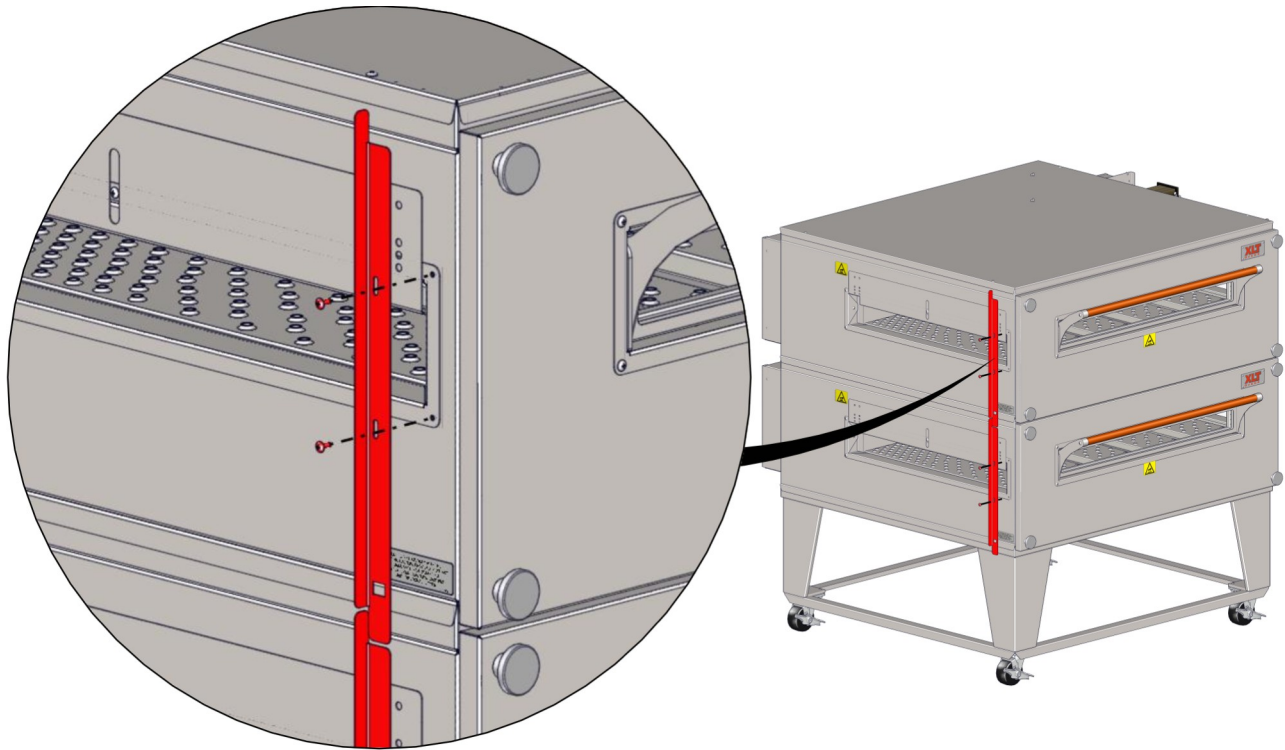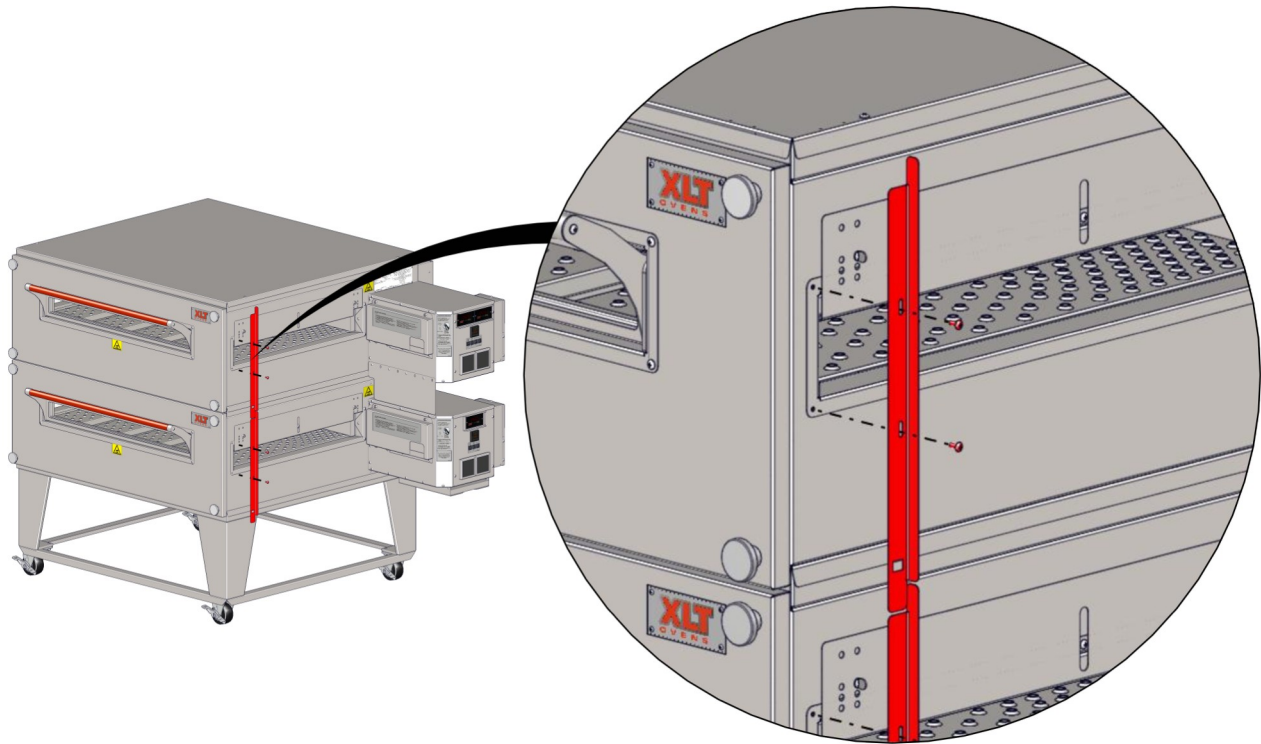


Prepare Ovens - Bottom Rail Bracket

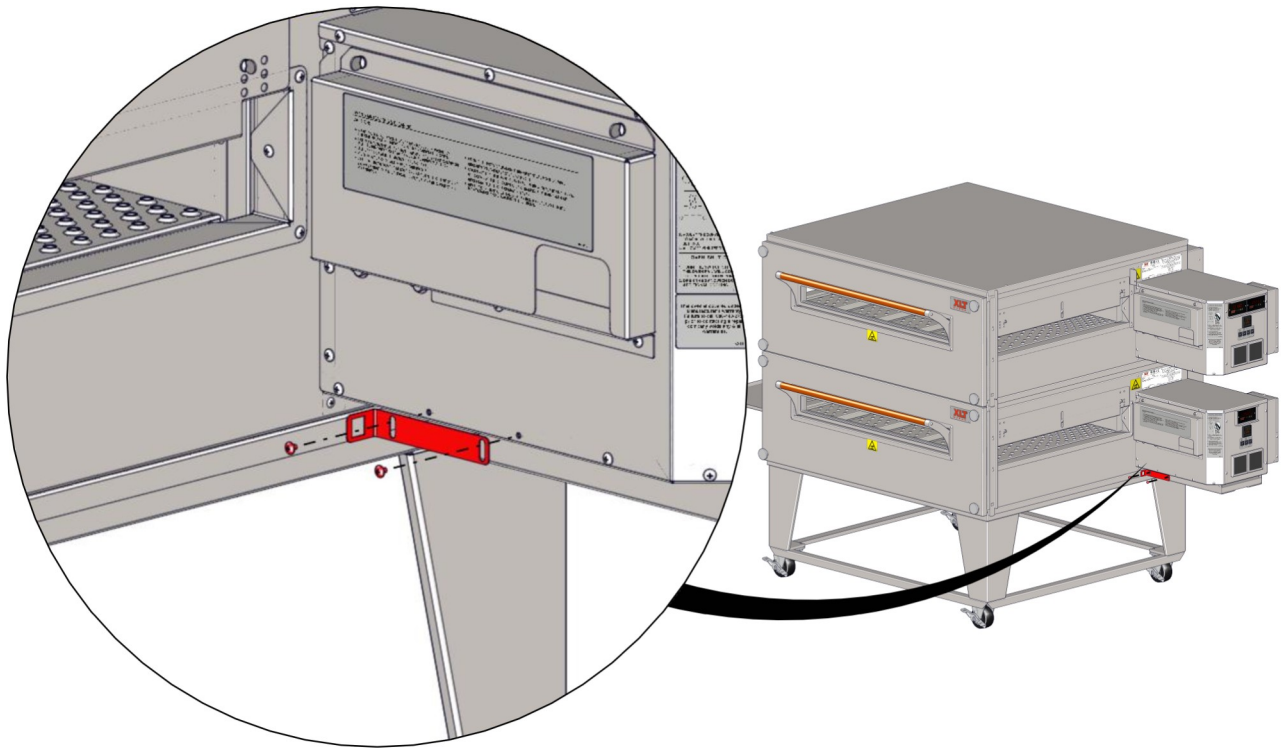


Prepare Ovens - Control Box Side Closeout

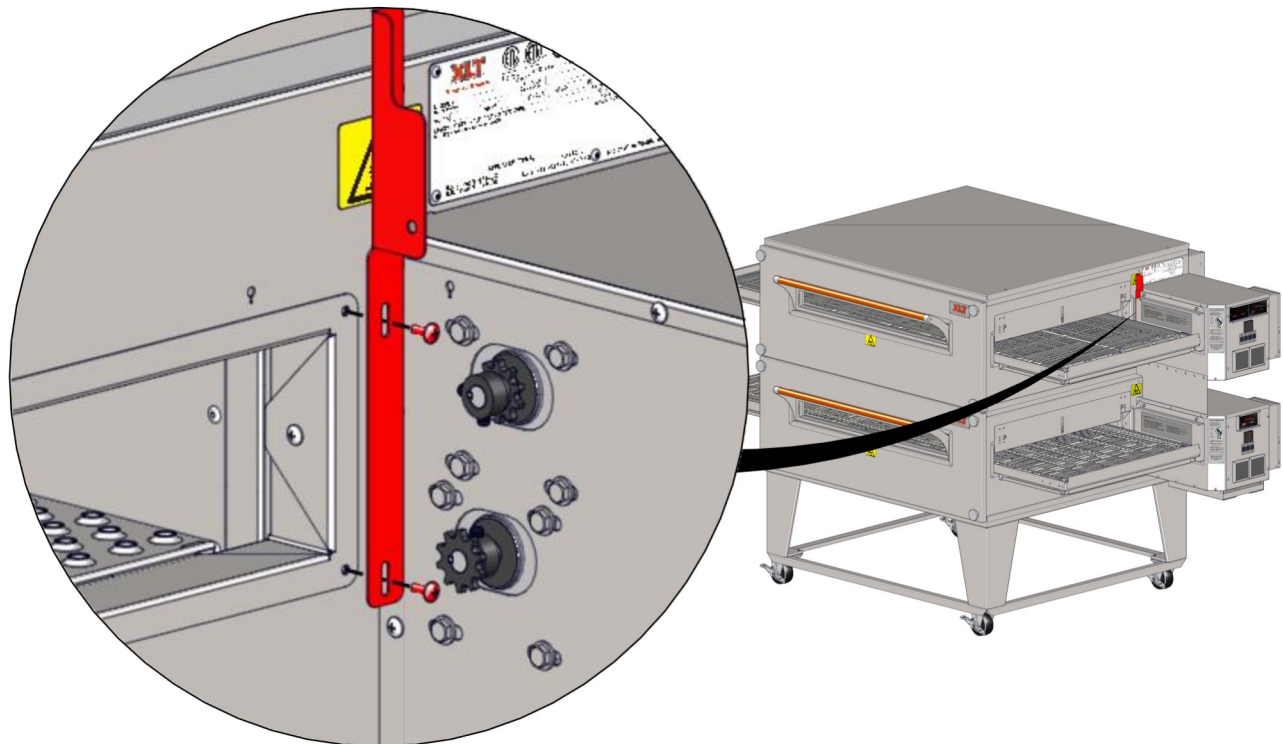

Prepare Ovens - Rear Shroud Brackets


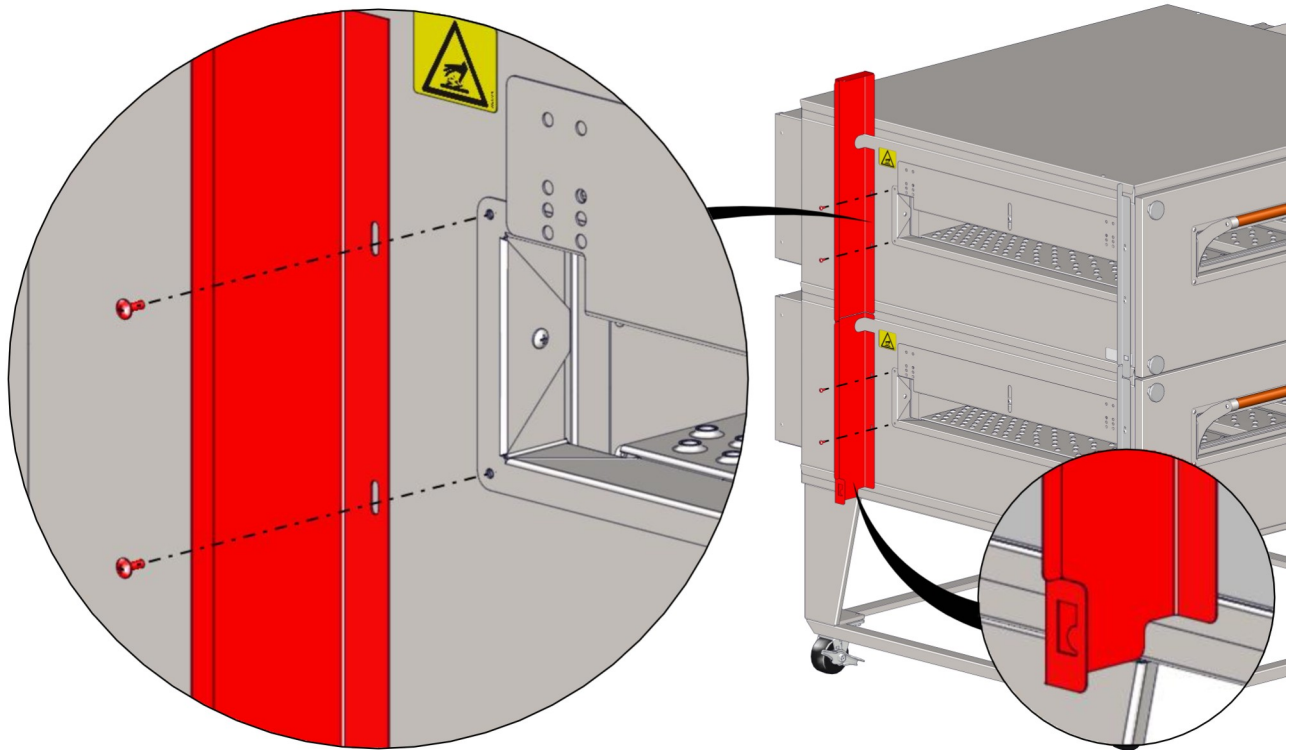


Prepare Hood

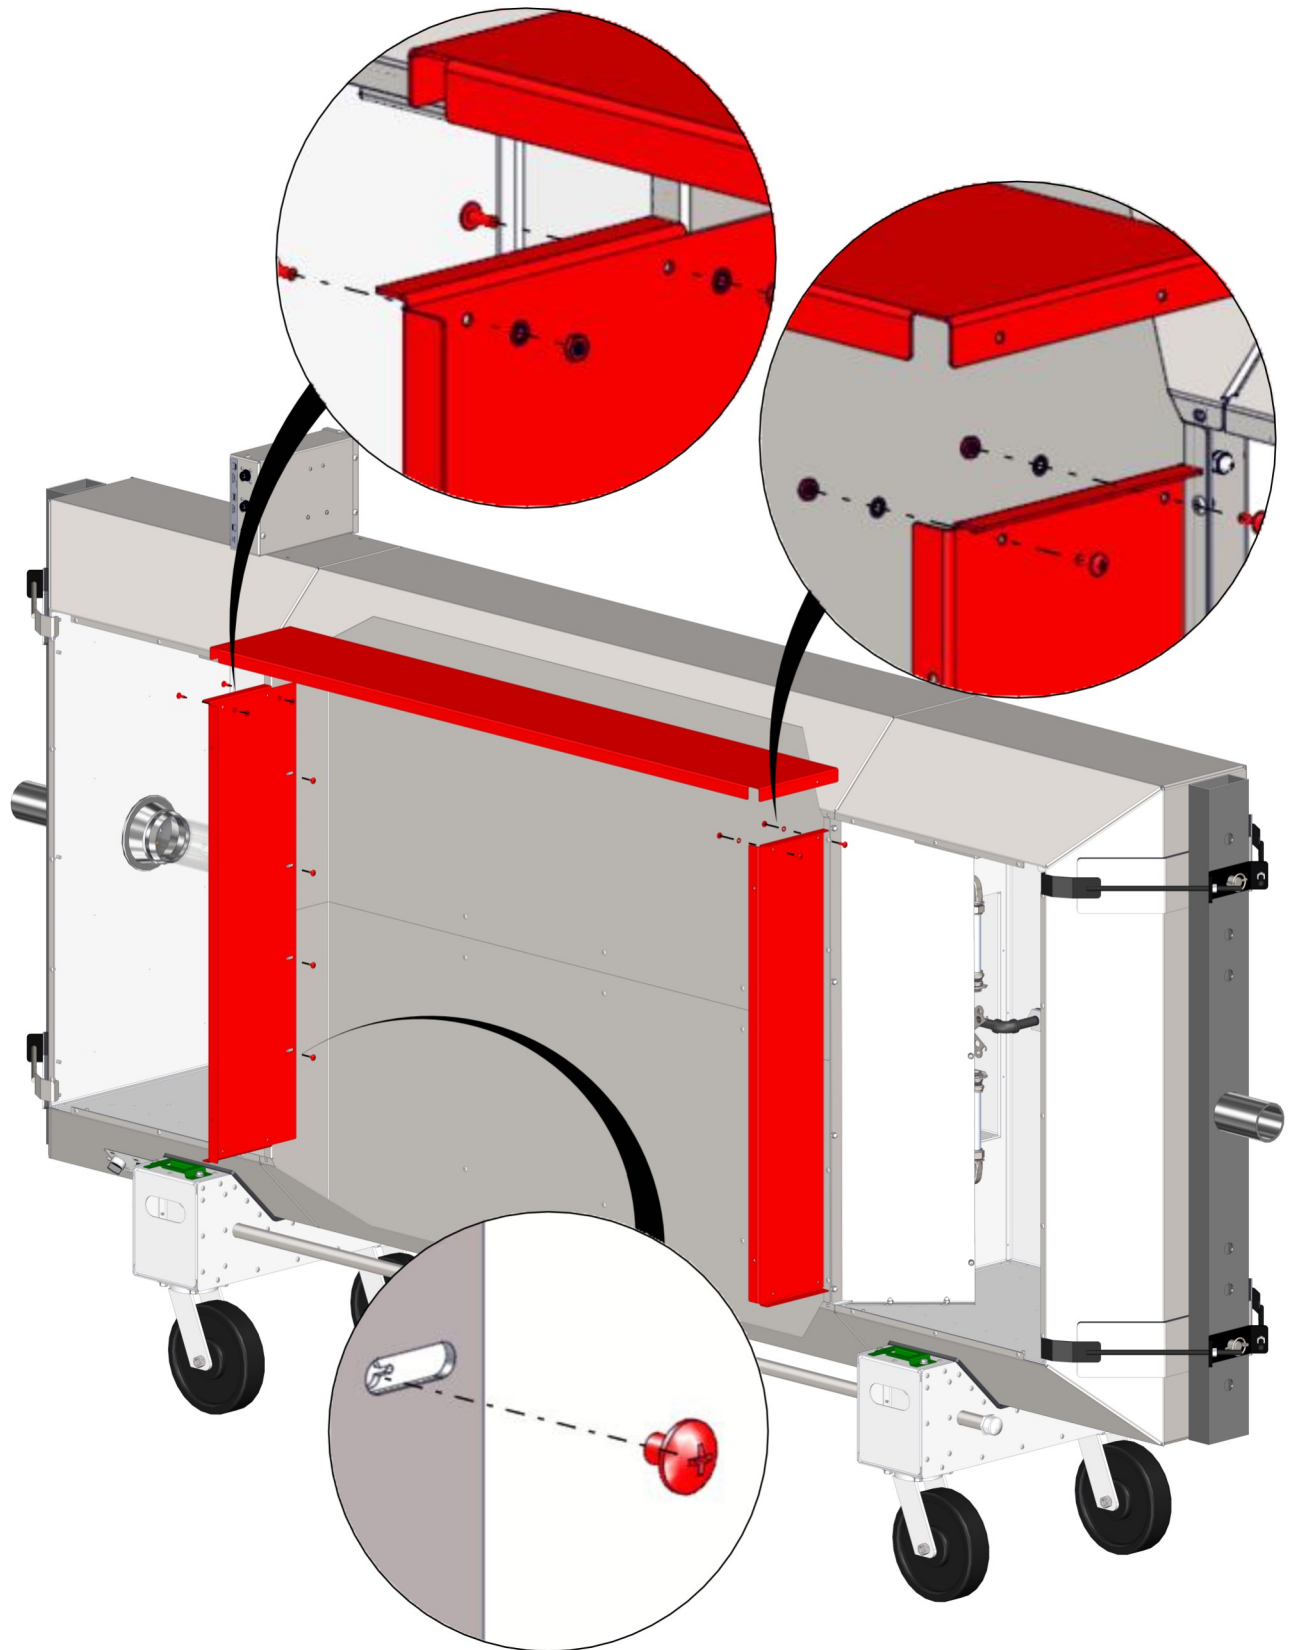

Lifting Gear Setup


AVI hoods can easily be moved and stacked with the proper lifting equipment. The use of XLT approved lifting equipment is highly recommended. Contact XLT for more information.

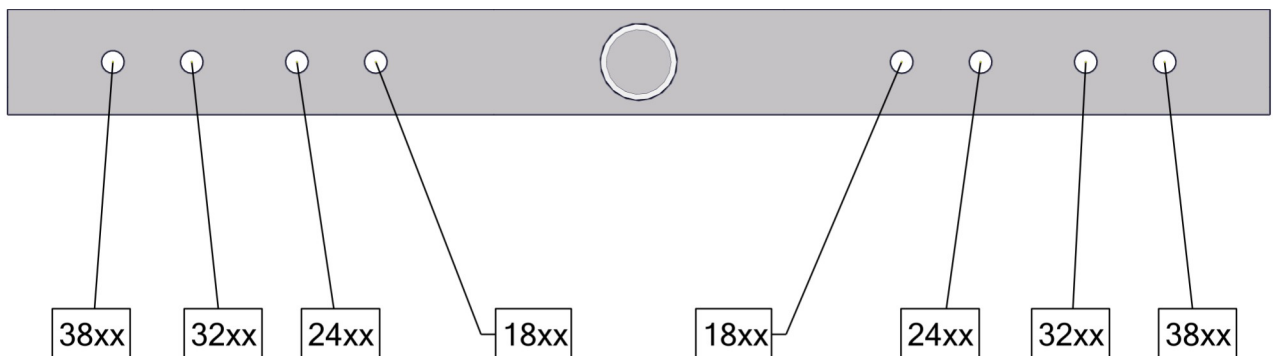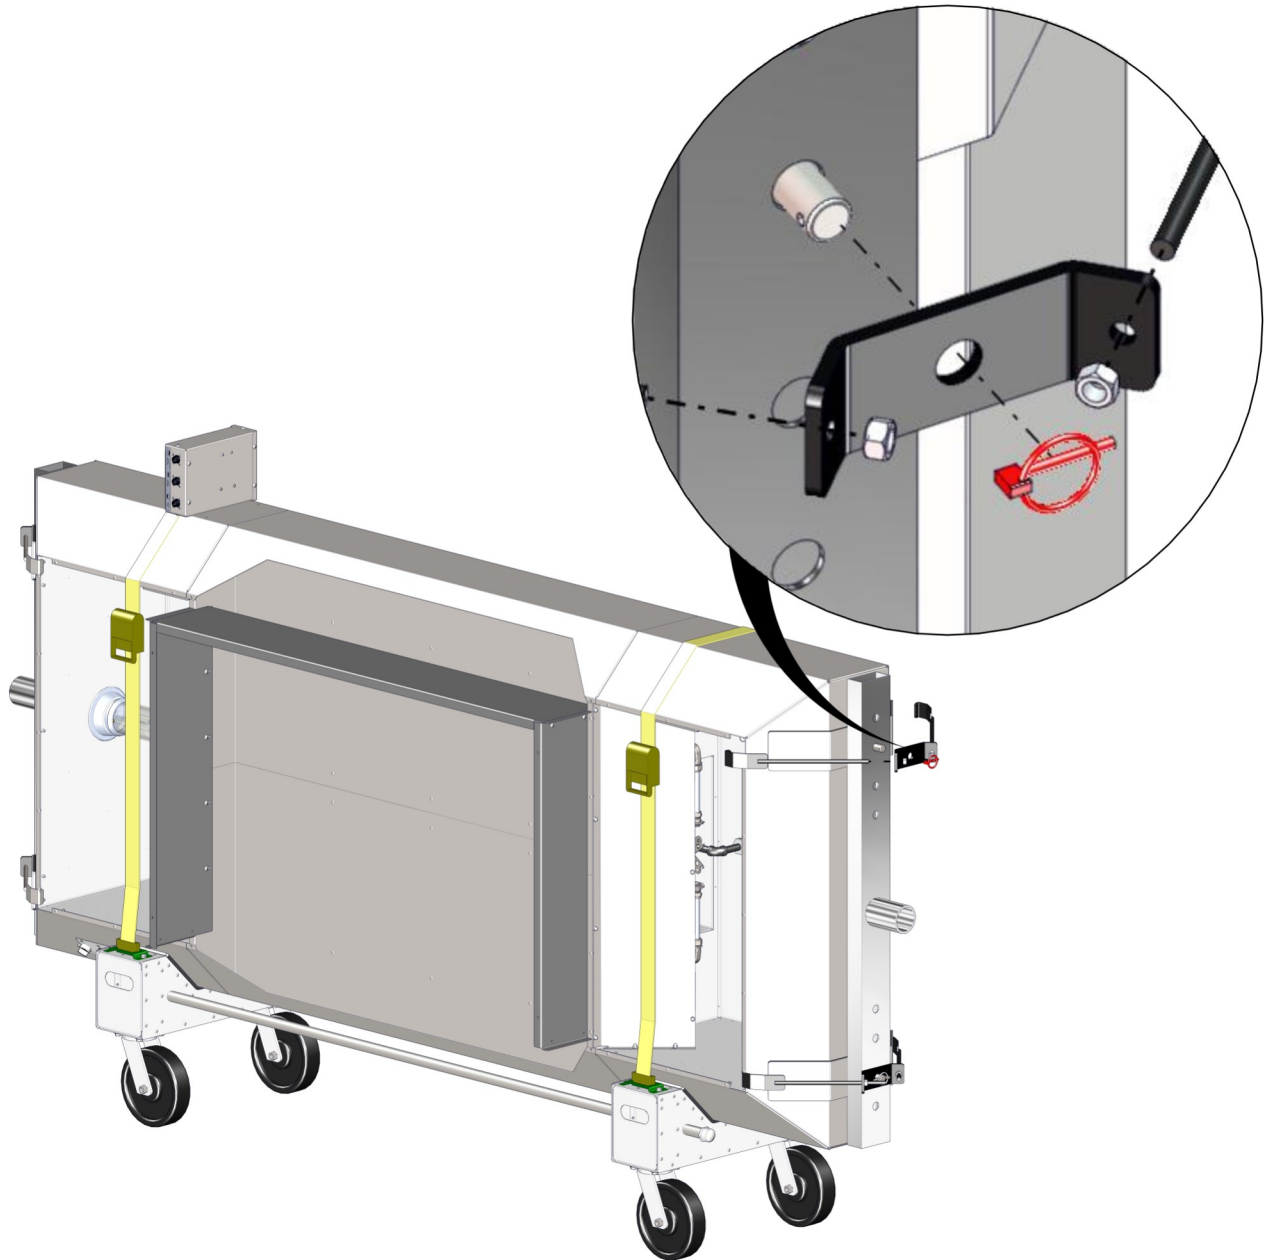

Lifting Jack Setup

**DANGER**

- Check for smooth operation. The cable should not be pinched & should pass smoothly over the pulley on top of the pole assembly.
- Inspect cable prior to each use.
- If cable is frayed or shows signs of excessive wear & tear, **DO NOT USE** until cable is replaced.
- At a minimum replace the cable annually with wire rope that meets or exceeds the jack manufacturer's specifications.
- Do not exceed the stated capacity of the jack.

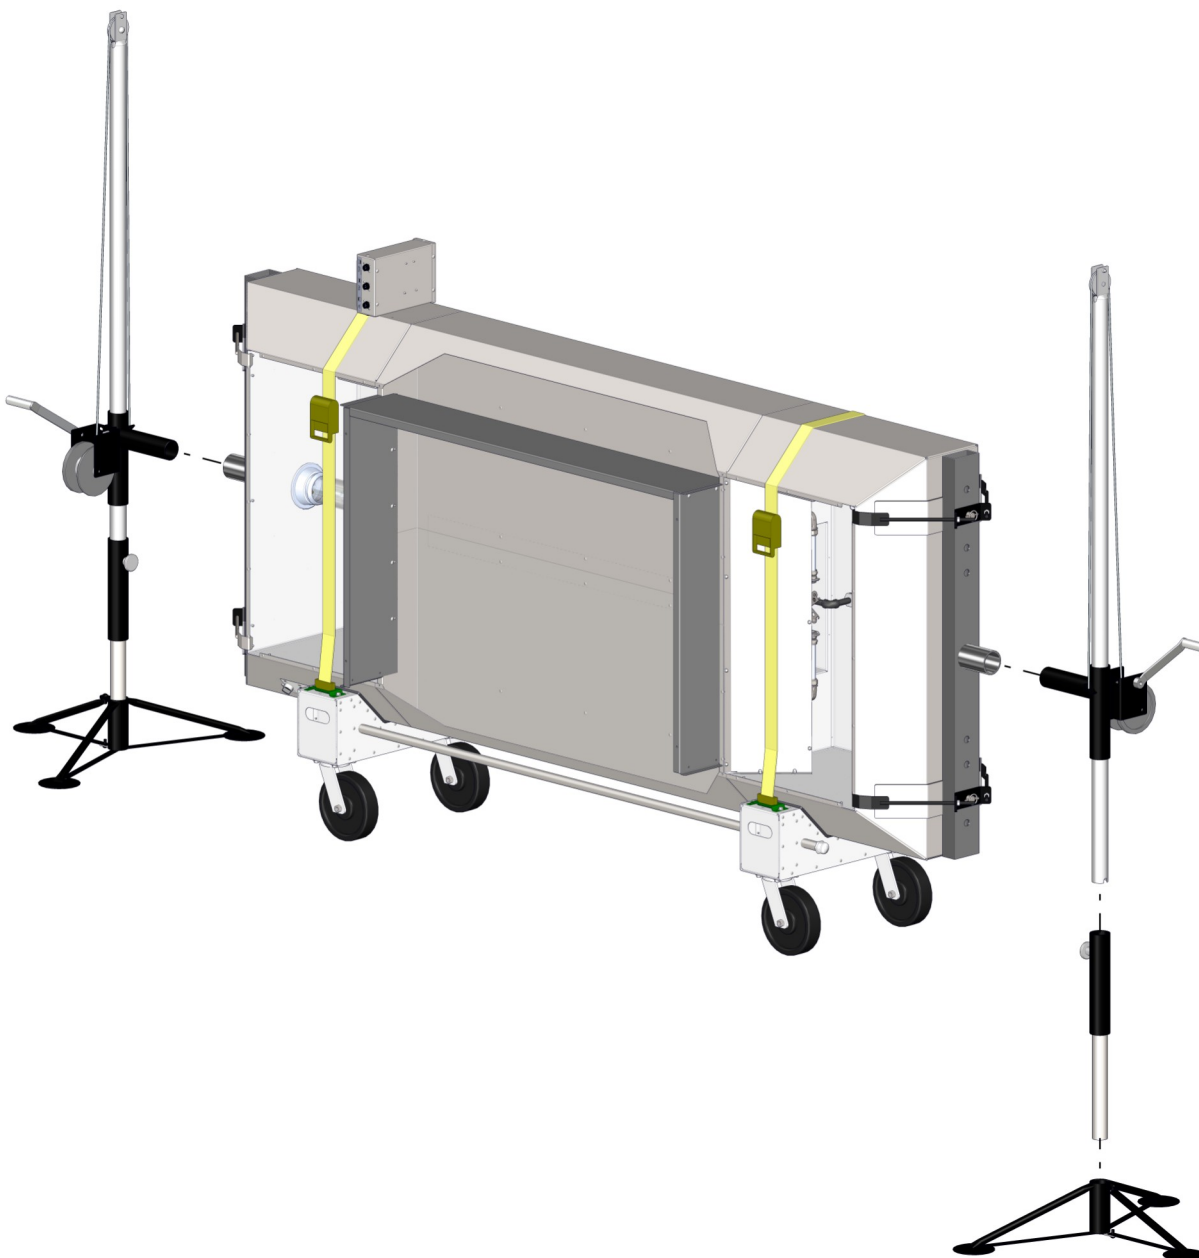

Stacking Hood on the Ovens




DANGER

Failure to engage the Lifting Jacks into the Lifting Pipe properly and completely will result in damage, injury, or death from a falling hood.



DANGER

- Both jacks should be raised in unison, otherwise they may bind and a dangerous situation will develop.
- Do not put any part of yourself under the hood at any time.
- The hood is top heavy. Be careful.

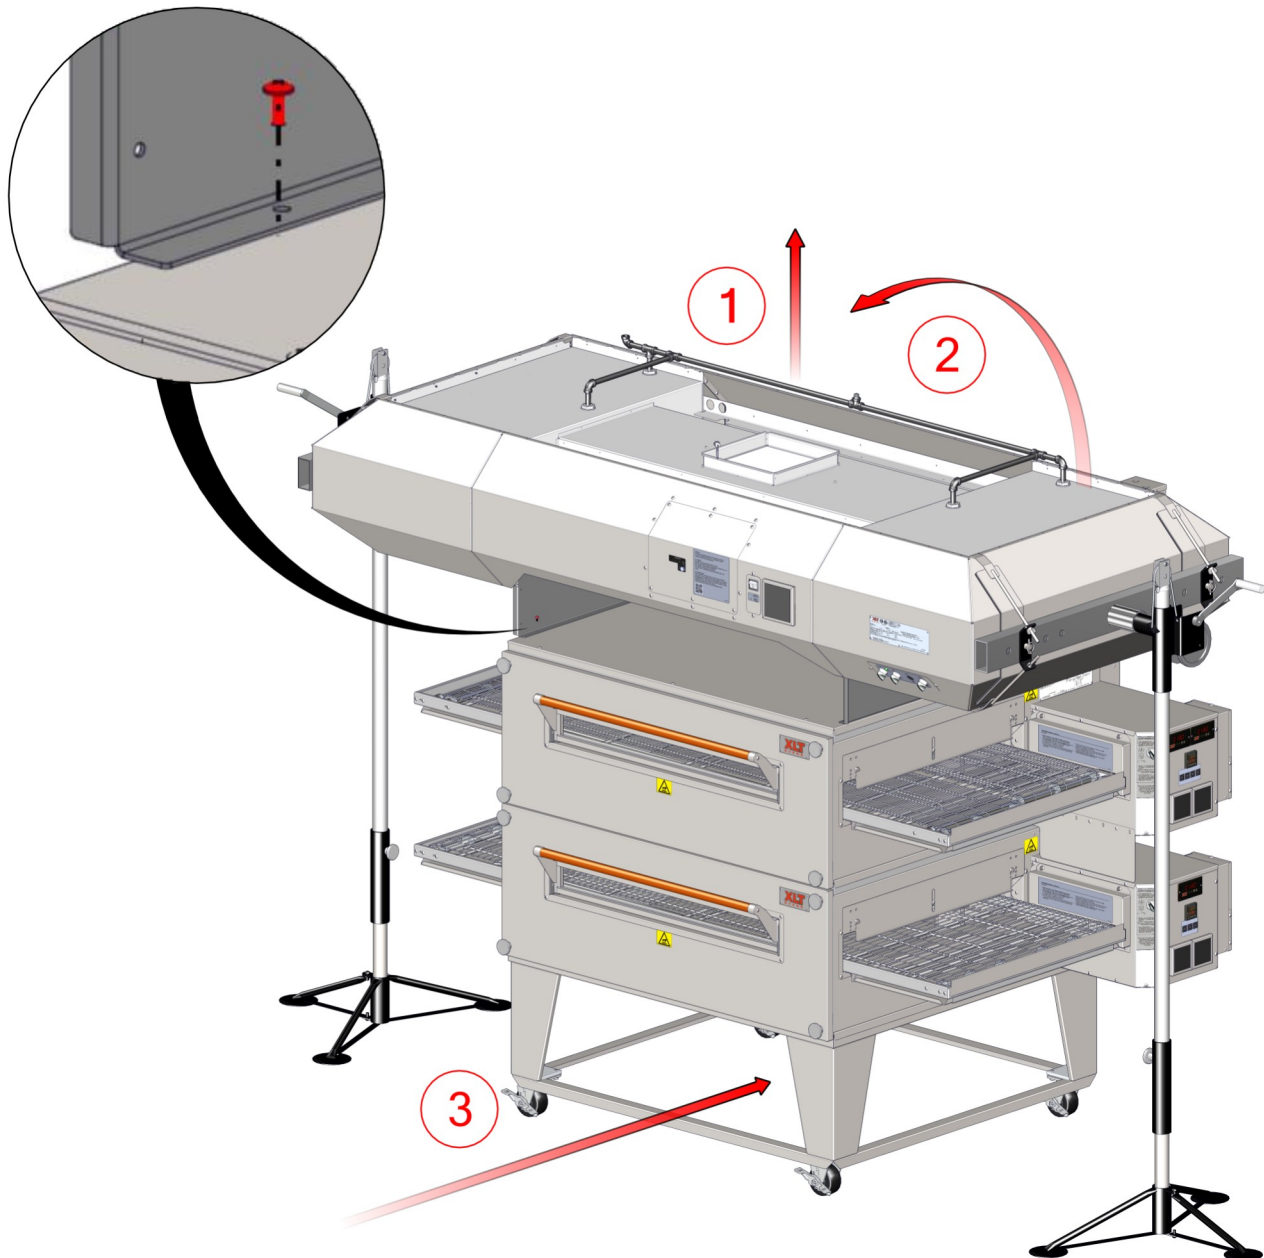


Hang Hood From Ceiling Joists



DANGER








Hood Must Be Suspended From Ceiling Joists

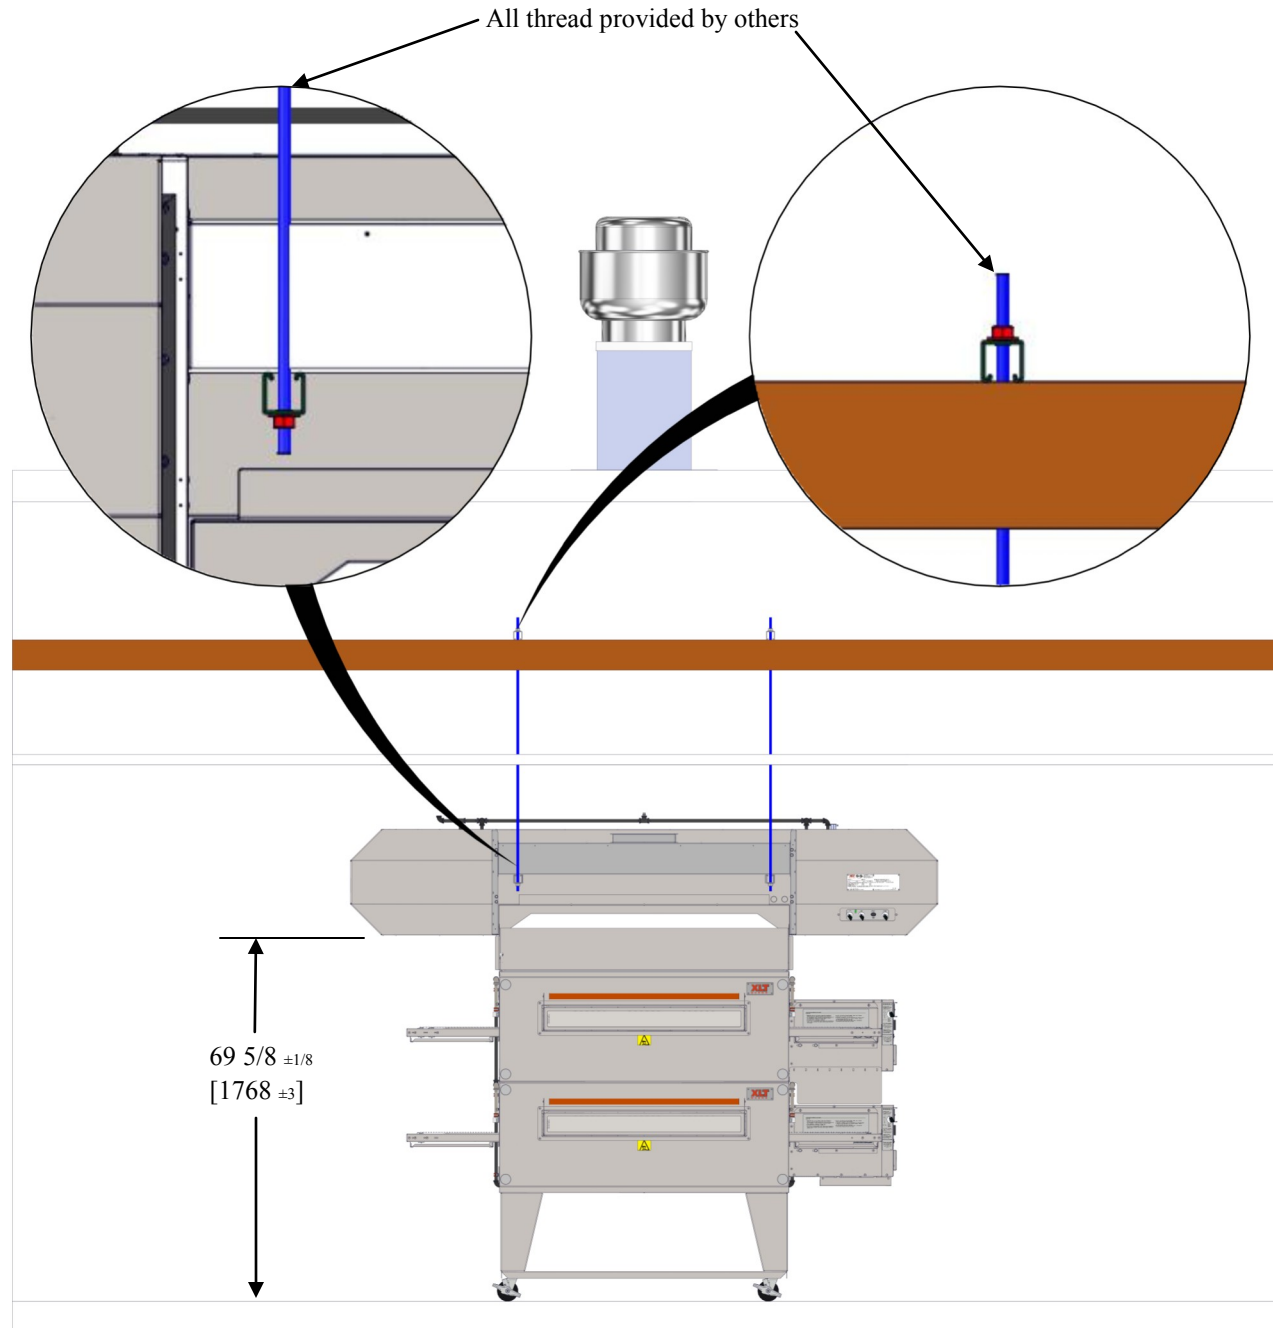


NOTE

This measurement is from the finished floor to the bottom of the suspended hood.


Install Grease Trays, Light Bulbs & Covers, and Grease Filters

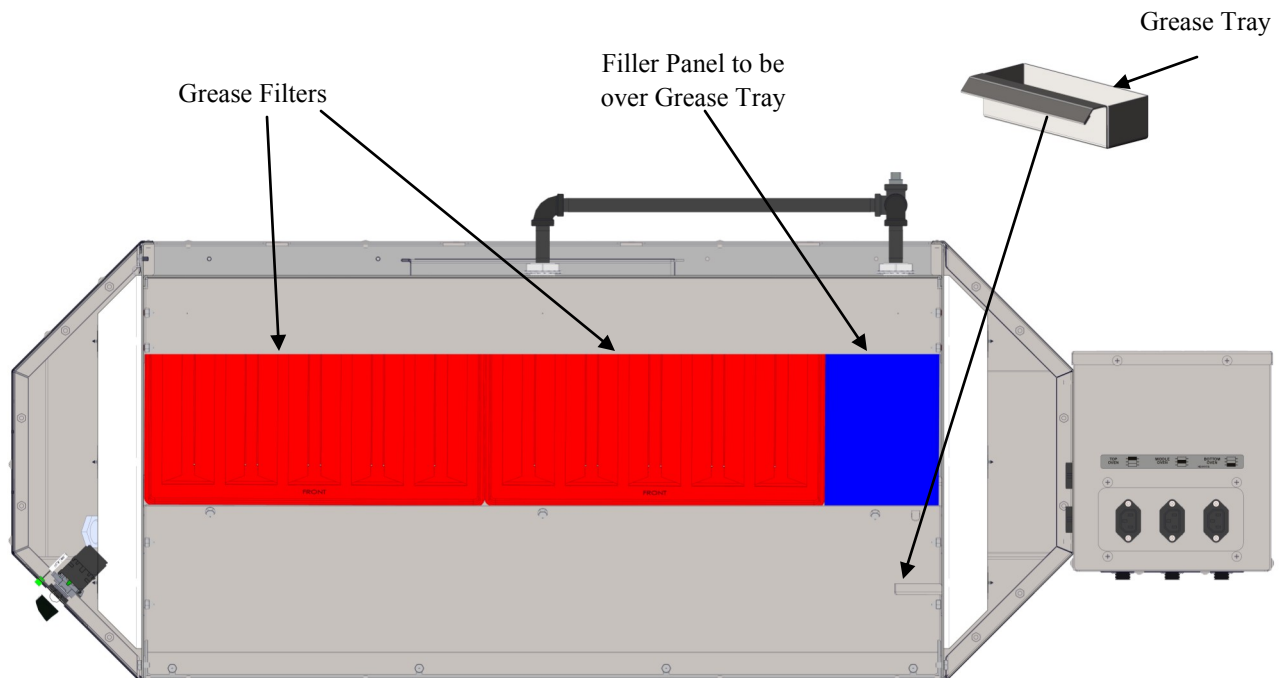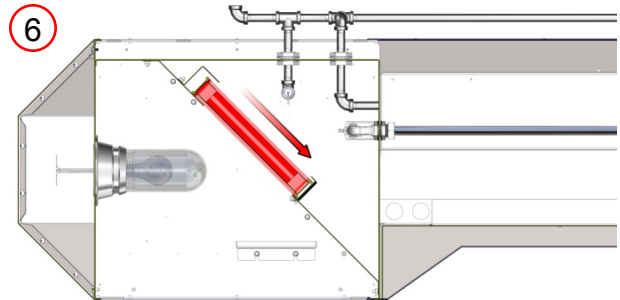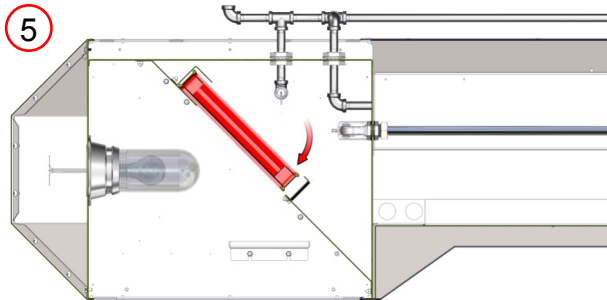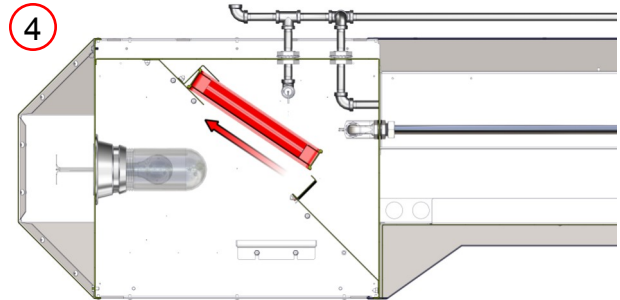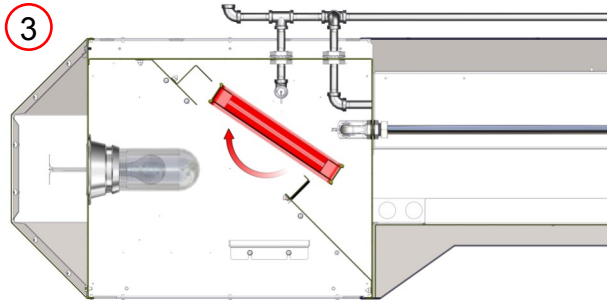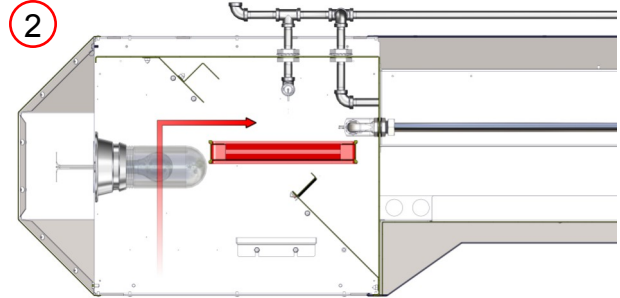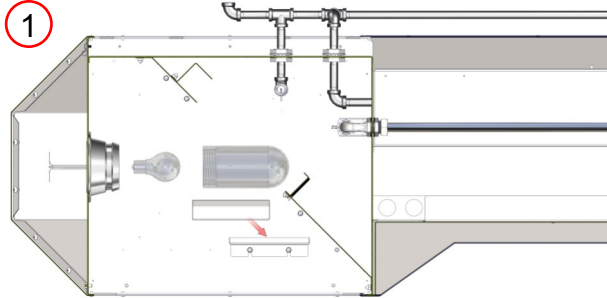





Install Shroud Hanging Brackets

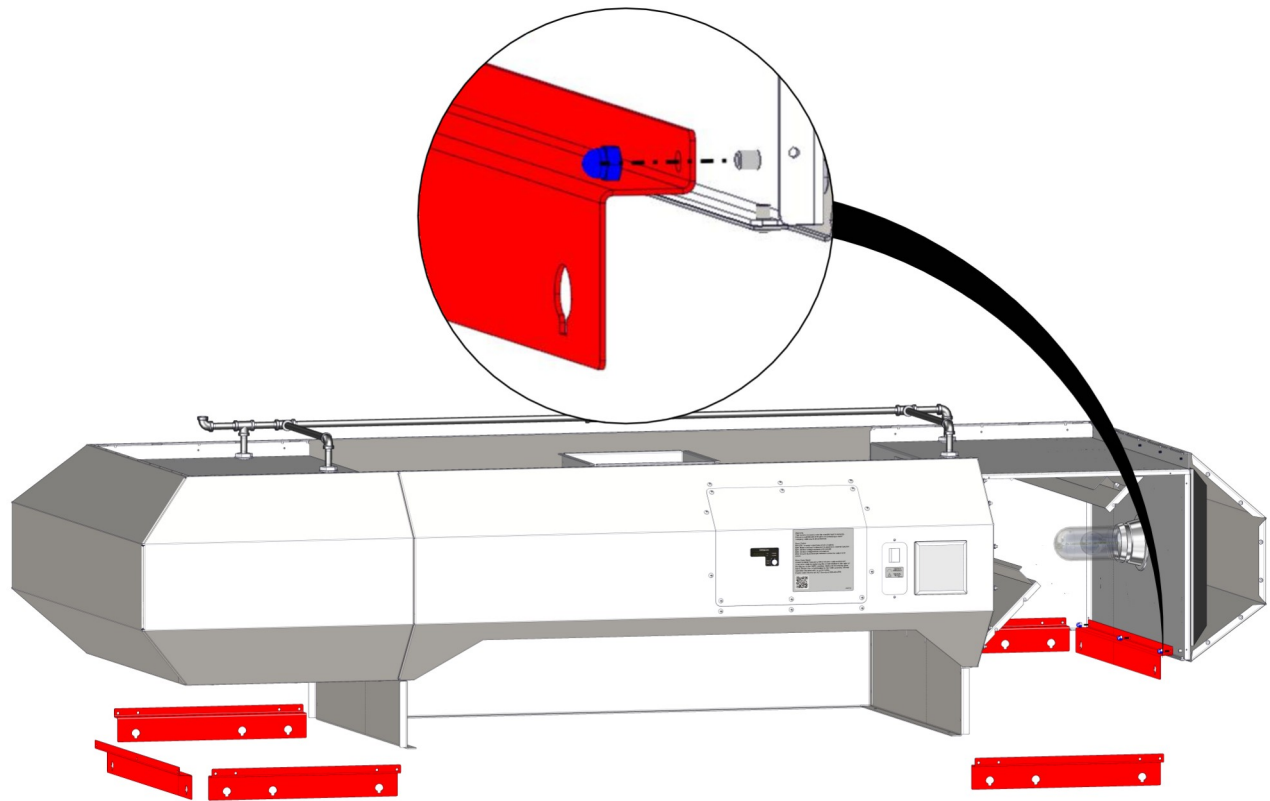


Install Corner Posts

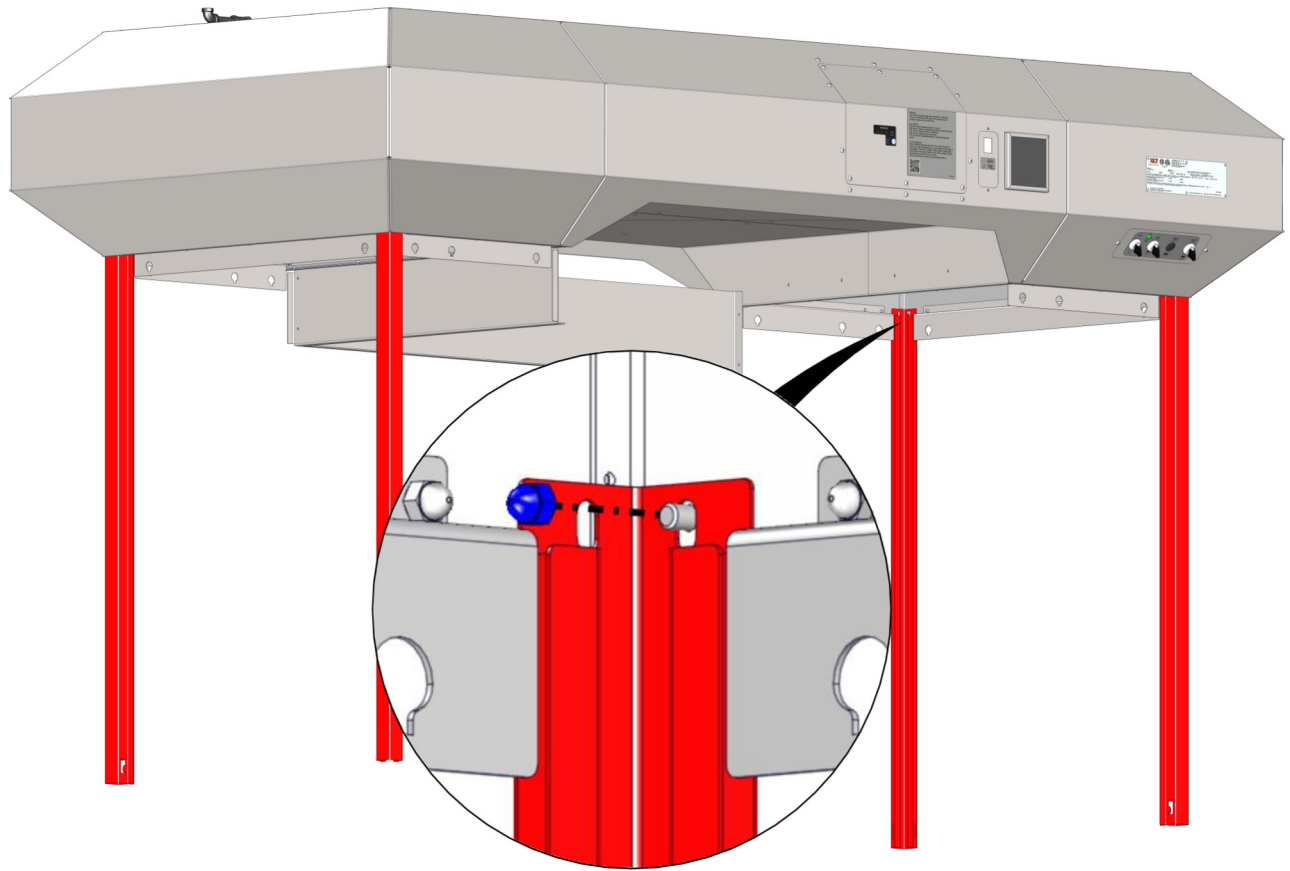

Install Bottom Rails

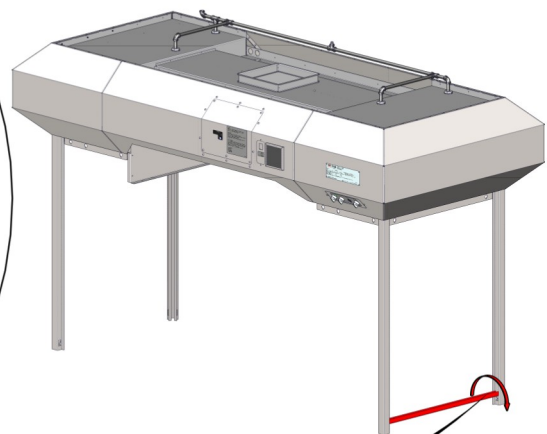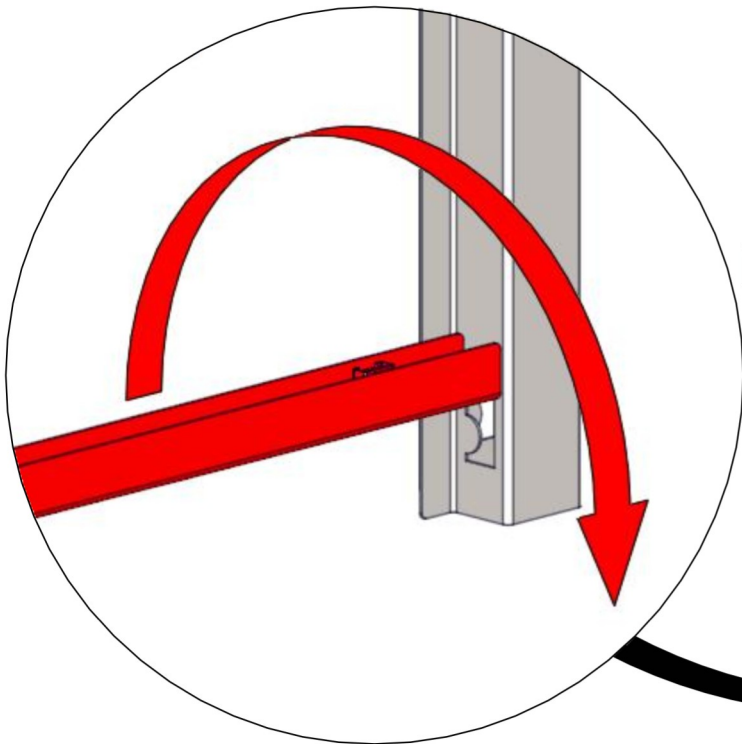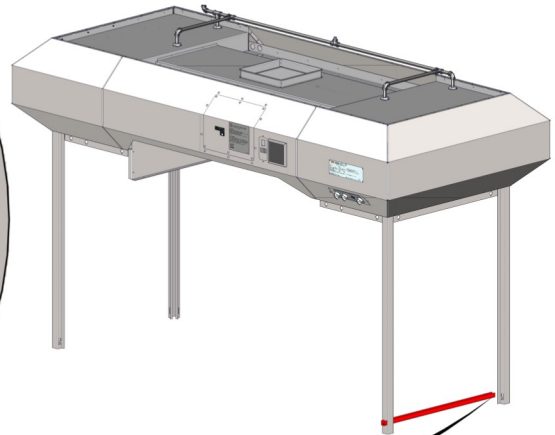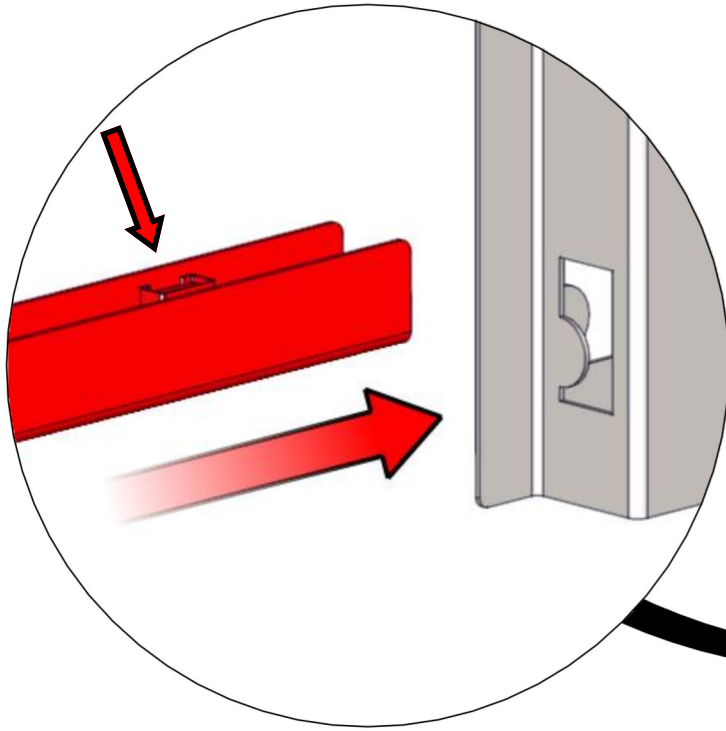


Install Bottom Rails

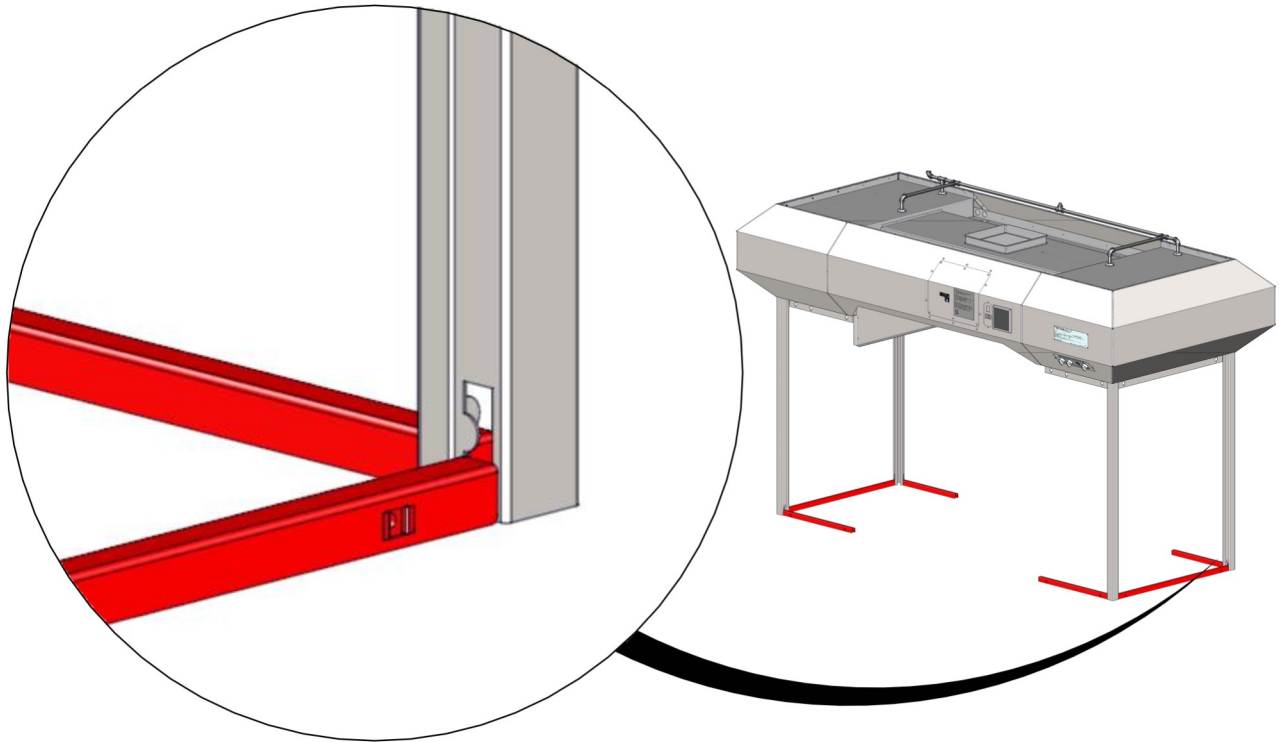


AVI HOOD INSTALLATION

Install Control Box Upper Closeout

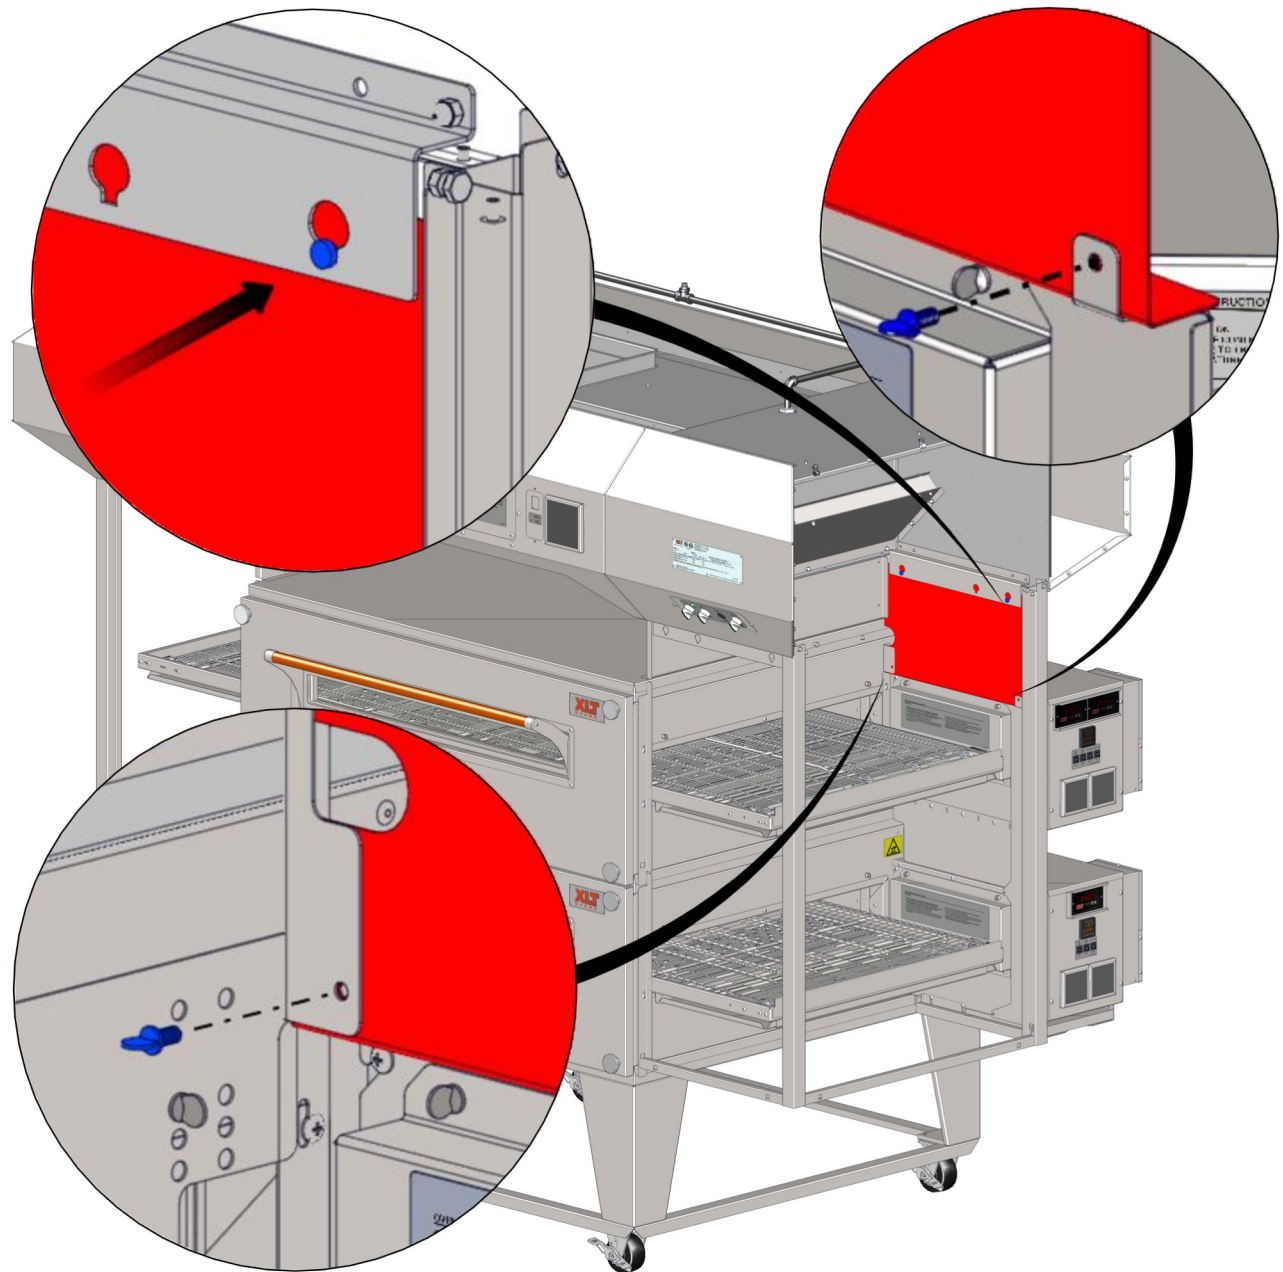


Install Shroud Panels - Front and Ends

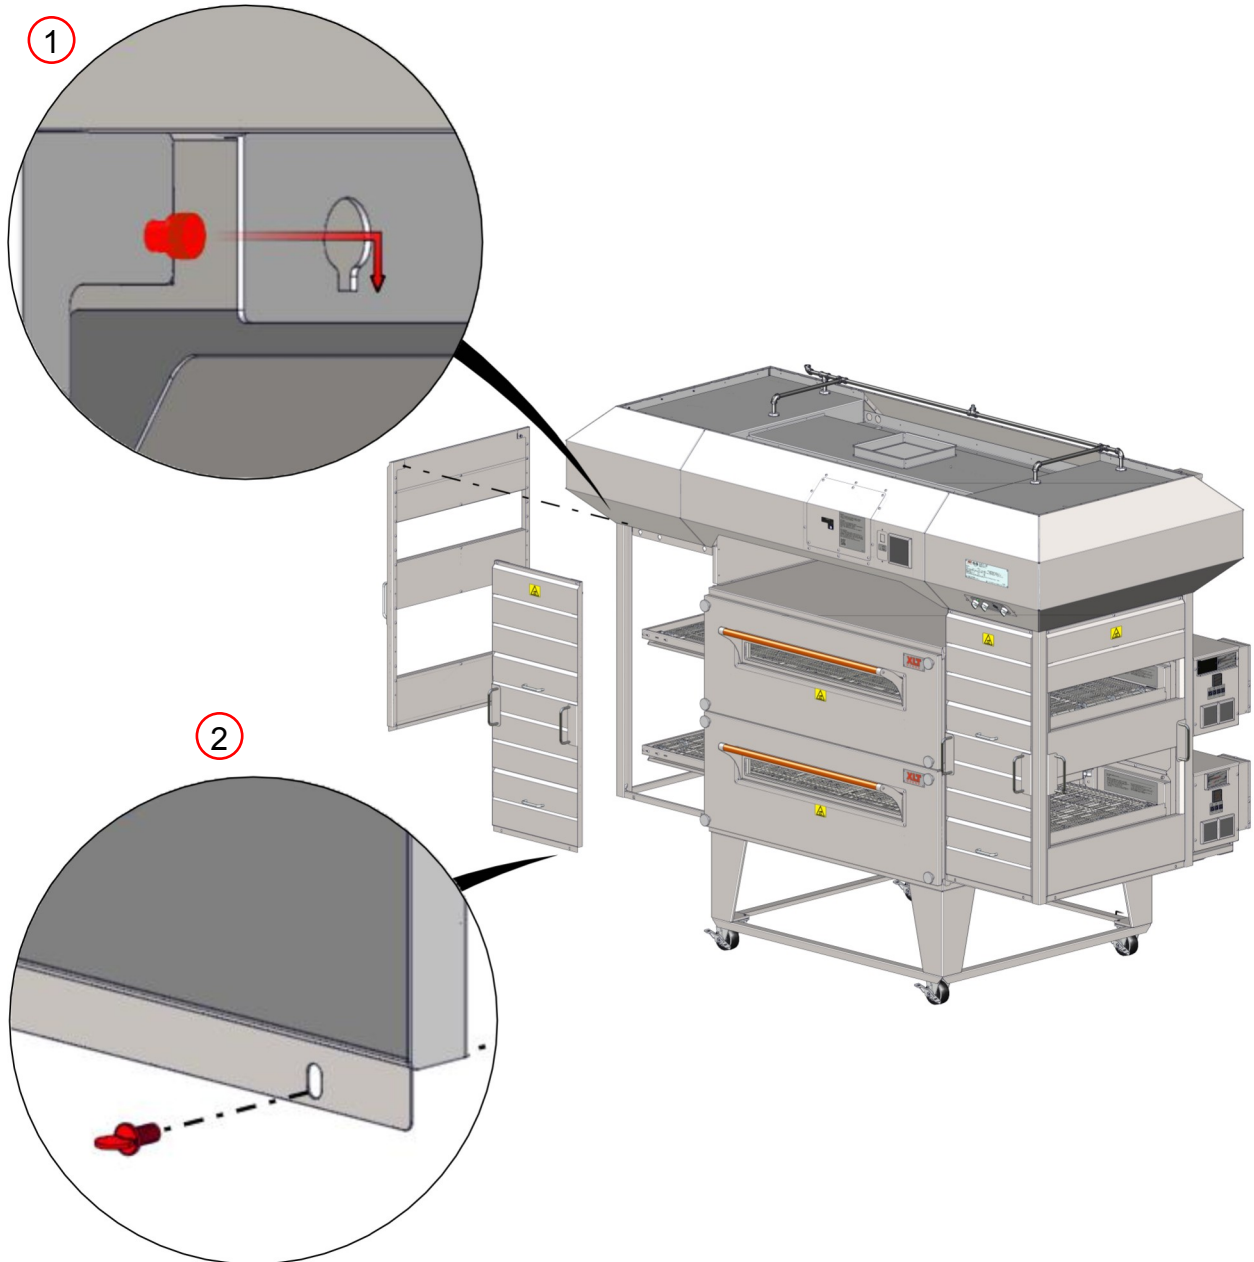

Install Back Shroud Panel



Install Hood Control Cord Assembly




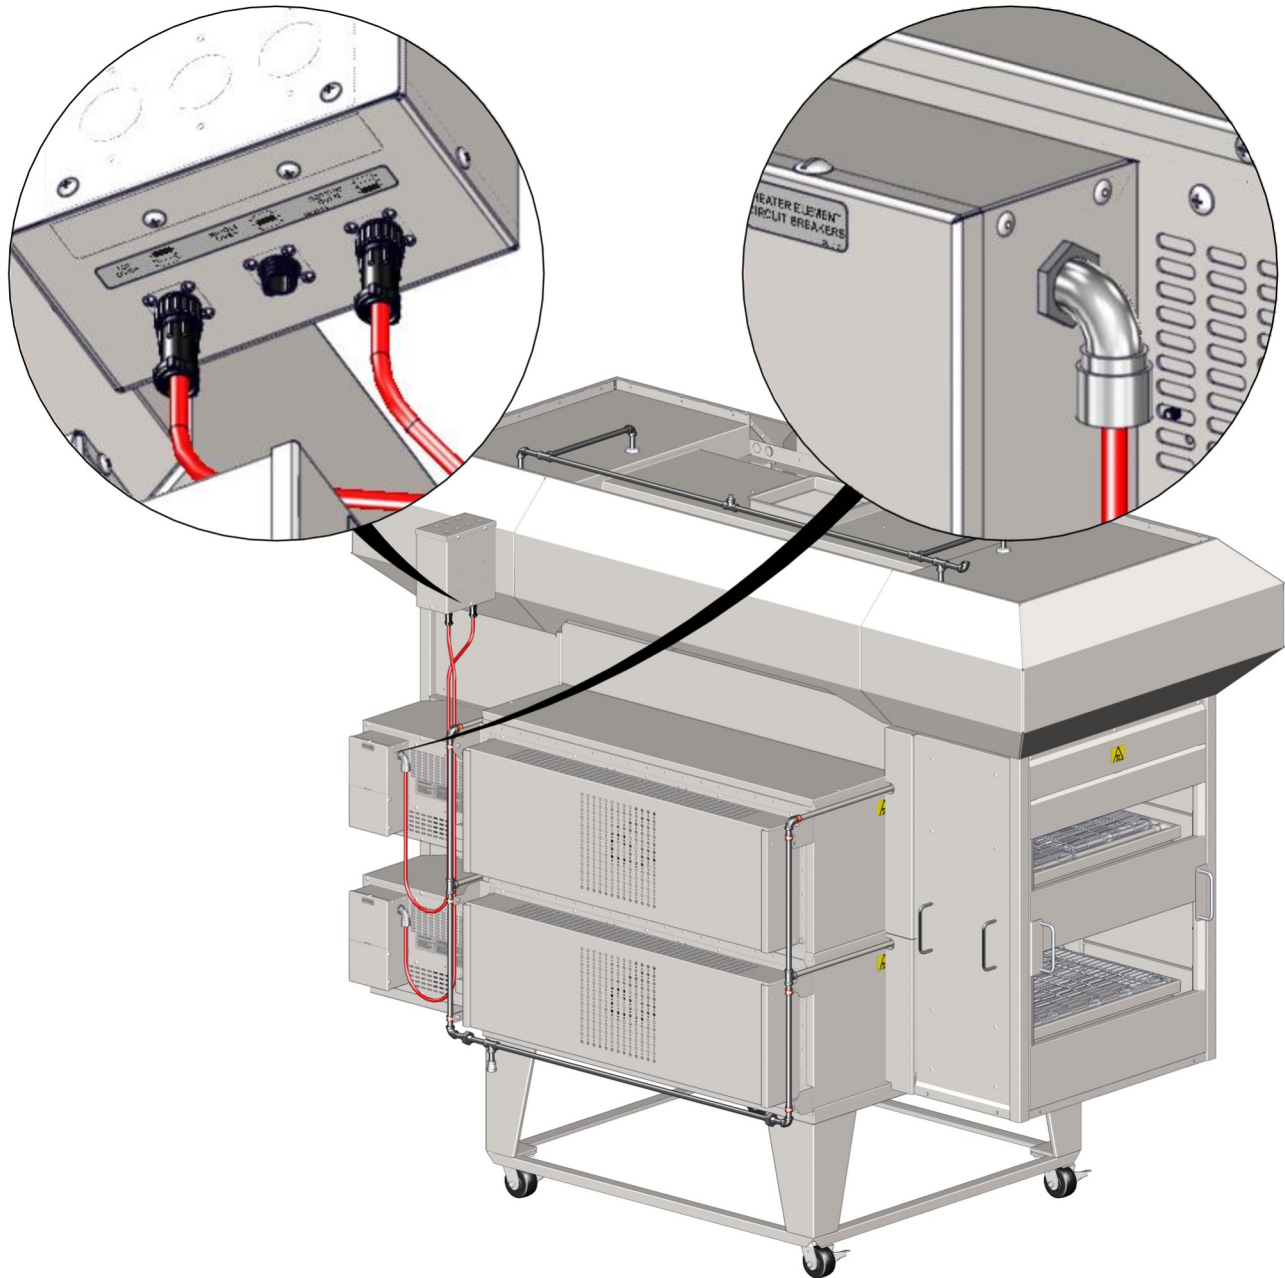


All hoods are outfitted with three (3) control cord outlets, regardless of how many XLT Ovens are installed. For a single oven use “Top” location. For a double stack use “Top” location for upper oven and “Bottom” location for lower oven, leaving “Middle” location open.

Insert and lock each oven control cord into the designated location on the bottom of the hood control box.

AVI HOOD INSTALLATION

Connect Hood Control Cord Assembly

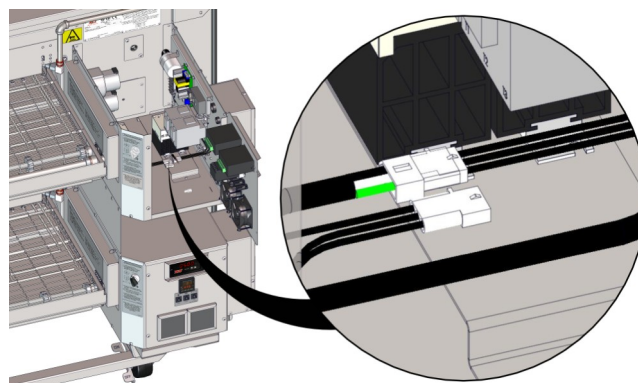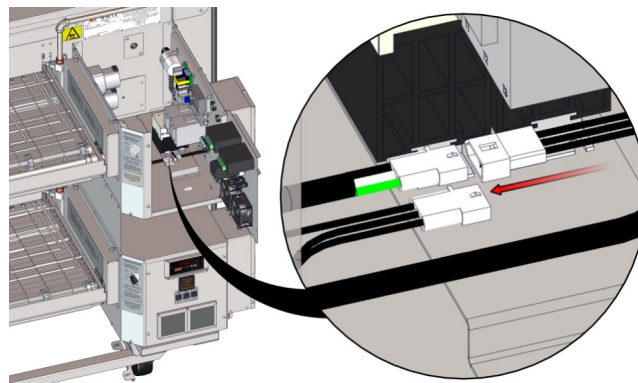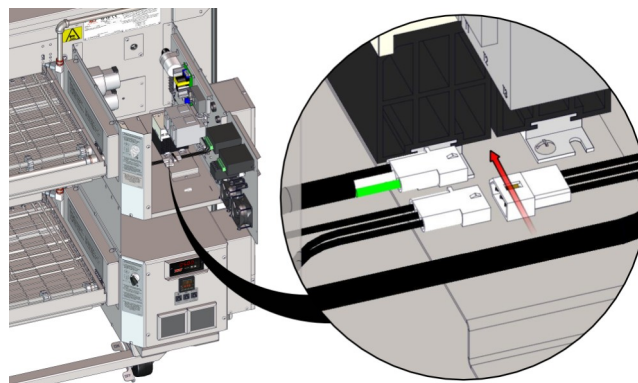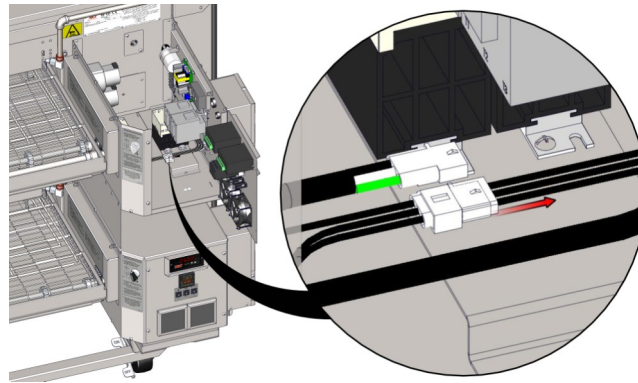

Variable Frequency Drive Adjustments

All AVI Hoods are functionally tested at the factory. Operation is verified, and adjustments are made to ensure proper operation. However, field conditions are sometimes different than factory conditions. These variables make it necessary to have an authorized service technician verify operation and make field adjustments if needed. The following items must be checked and verified to meet the specifications and requirements stated in this manual prior to the hood being commissioned:

- **Correct fan rotation.**
- **Balanced make-up air.**


The Initial Start-Up Checklist must be completed at time of installation, signed by the Customer and returned to XLT Ovens to initiate Warranty Policy.

The VFD controller is adjusted at the factory to the values displayed in the chart below.

VFD Controller Settings						
	Switches On			1832, 1855 & 2440	3240 & 3255	3855
	Top	Middle	Bottom			
Single	X			20 Hz	25 Hz	30Hz
Double	X			20 Hz	25 Hz	30Hz
			X	35 Hz	40 Hz	45 Hz
Triple	X		X	35 Hz	40 Hz	45 Hz
	X			20 Hz	25 Hz	30Hz
		X		30 Hz	35 Hz	40 Hz
			X	40 Hz	45 Hz	50 Hz
	X	X		30 Hz	35 Hz	40 Hz
	X		X	40 Hz	45 Hz	50 Hz
		X	X	40 Hz	45 Hz	50 Hz
Fire Suppression				60 Hz		


If you require either more or less air flow, follow these steps:

1. Turn at least one (1) oven switch ON. The VFD display should show the POWER and RUN LED lamps lit up, and a numeric value should appear in the window display.

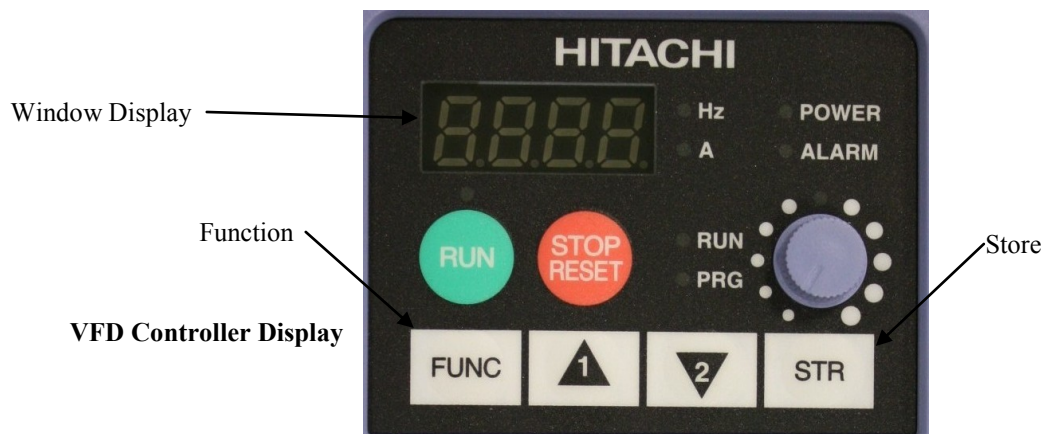

2. Press & hold the function key until <d001> displays.
3. Use the up / down arrows to reach <F001>.
4. Press the function key one (1) time. A frequency will display according to the switches that are ON per the chart below.
5. Turn all oven switches OFF. The display should read <0.0>.
6. Turn ON the oven switches to be set. For example, both Top and Bottom ovens, or Top oven only, or Bottom oven only, etc.
7. Press the Up/Down arrows until you reach the desired initial settings.
8. Press the store button once to store the new setting.
9. Repeat steps 6-8 for additional settings as needed.
10. When finished, turn all of the oven switches to the OFF position.
11. Press the <FUNC> key until <d001> appears in the display.
12. Press the <FUNC> one more time. The actual frequency will appear in the window display.
13. Press the <STR> button one time to store the values.

The control switches are located on the front of the hood.

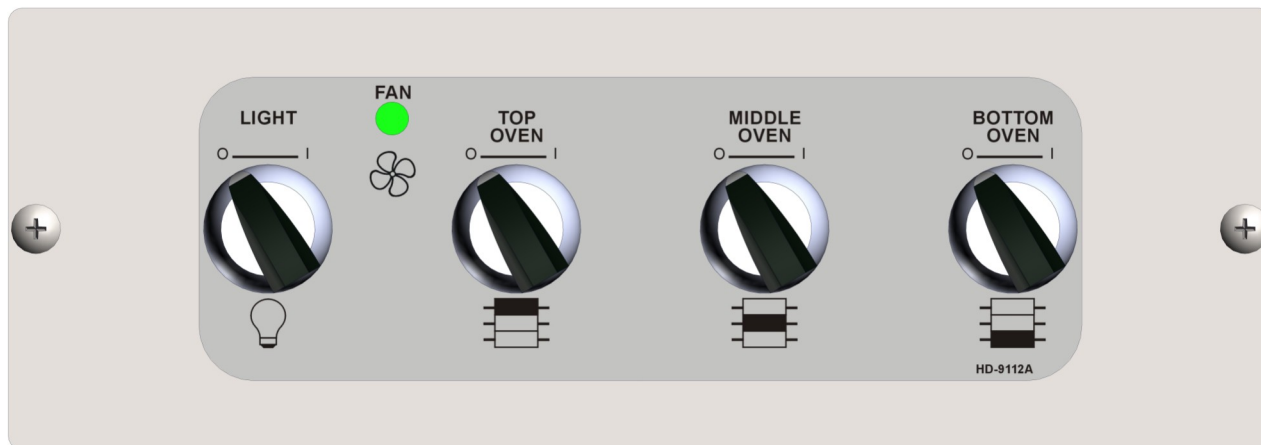


NOTE → When XLT Ovens are outfitted with AVI Hoods, the main switch on the oven is disabled and no longer operates. The switch on the AVI Hood overrides the oven switch.

Hood Operation


1. Turn the light switch on.
2. Turn the desired oven switch on. Refer to the Oven start-up section for instructions on how to adjust temperature and conveyor speed. The oven(s), exhaust fan, and make-up air unit will be activated by this switch if the AVI Hood is installed according to this manual.
3. When additional oven switches are turned on, the VFD will automatically increase the exhaust fan speed.
4. When shutting down the ovens, turn the desired oven switch off. The make-up air unit will shut off. The ovens and exhaust fan will shut off after about 30 minutes. Refer to the Oven shutdown section for instructions.
5. Do not press the <STOP/RESET> switch on the Variable Frequency Drive itself. The RUN and POWER LED should stay lit all of the time.

The valance kit size is determined by AVI Hood size & distance from the finished floor to the installed drop ceiling height. The valance kit screws directly to the AVI Hood & does not require any structural support. All kits have provisions for hood fire suppression piping to pass through without modification. The plastic coating must be removed from all parts prior to installation.

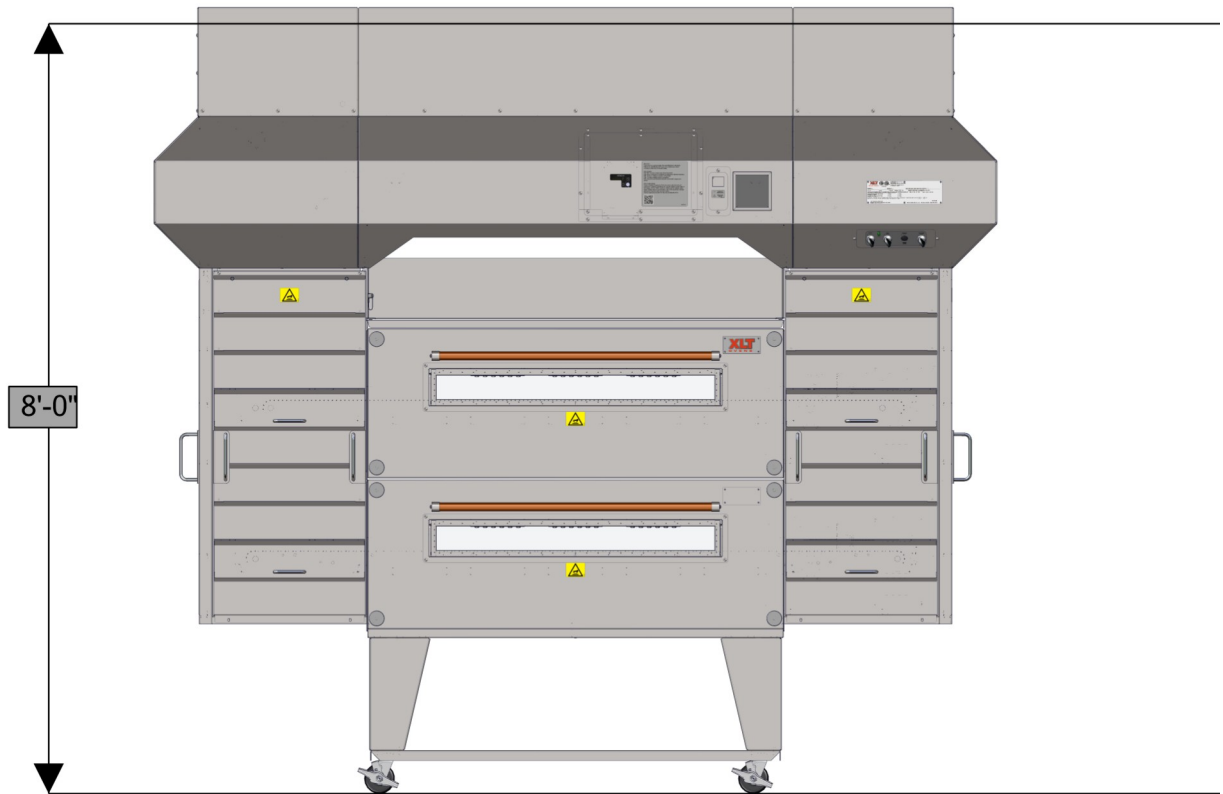


AVI Hood valance kits are available for different floor to ceiling heights. Contact XLT Ovens or your designated representative for more information.


Install Valance Brackets

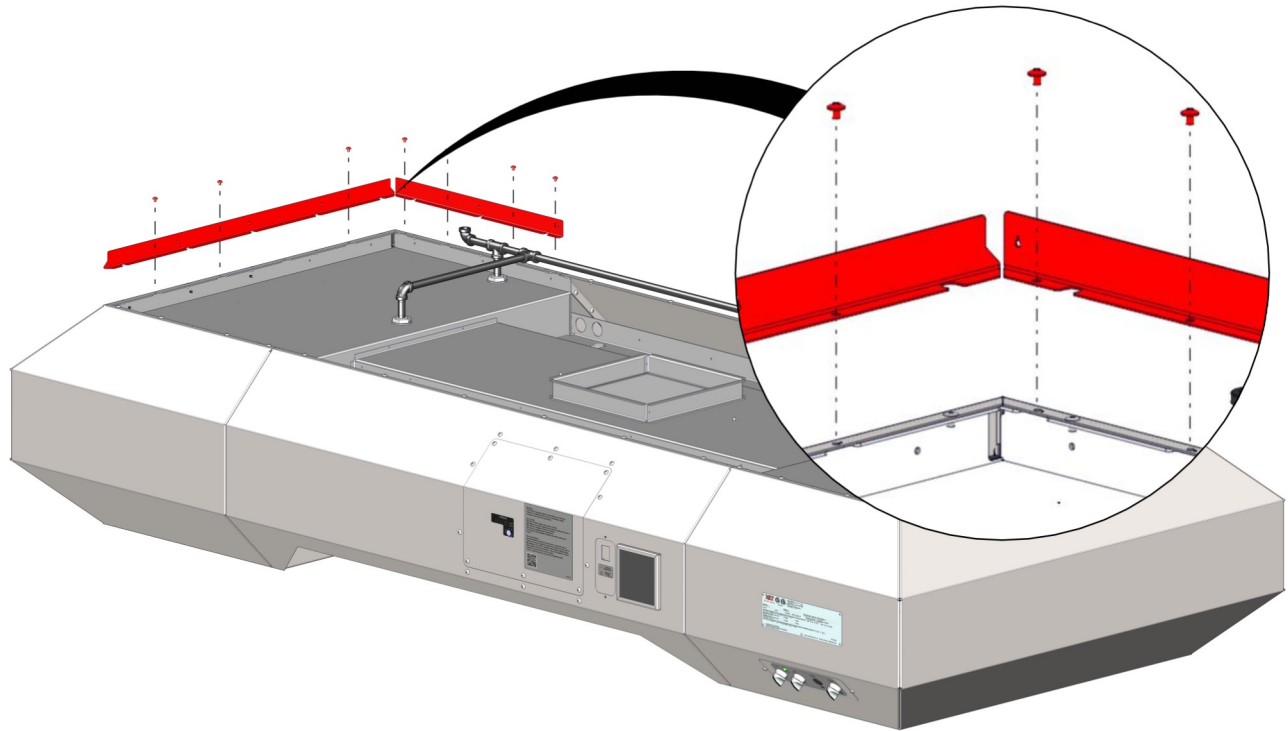


Install Front & Back Panels

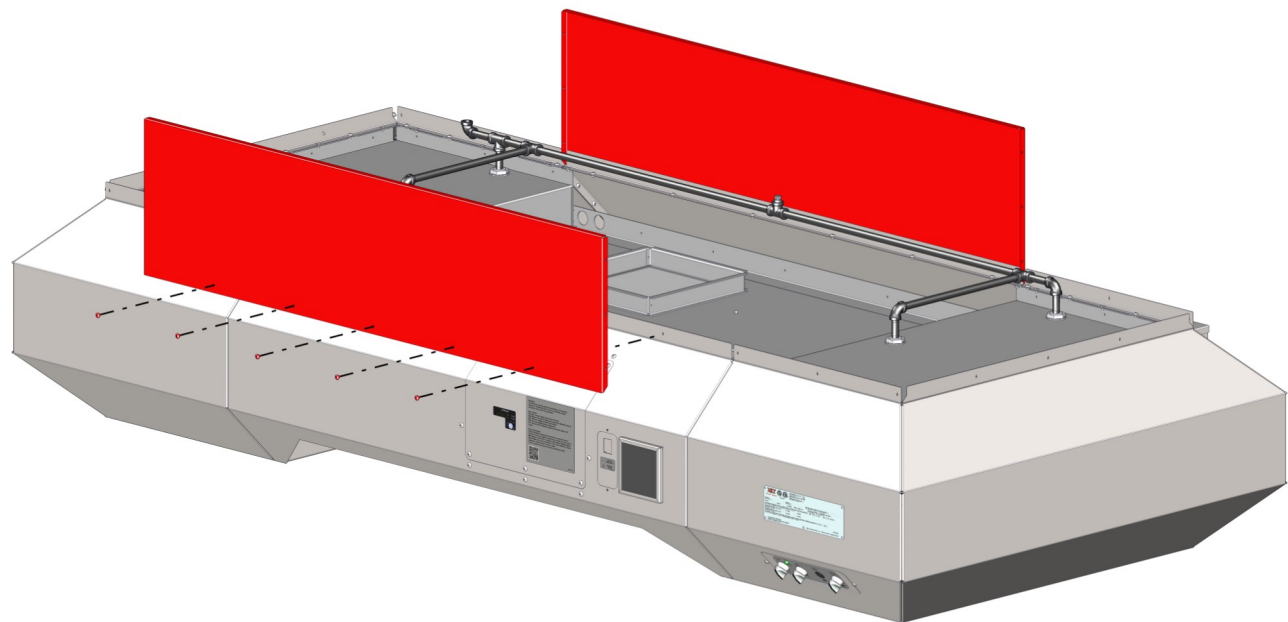


Install Corner Panels

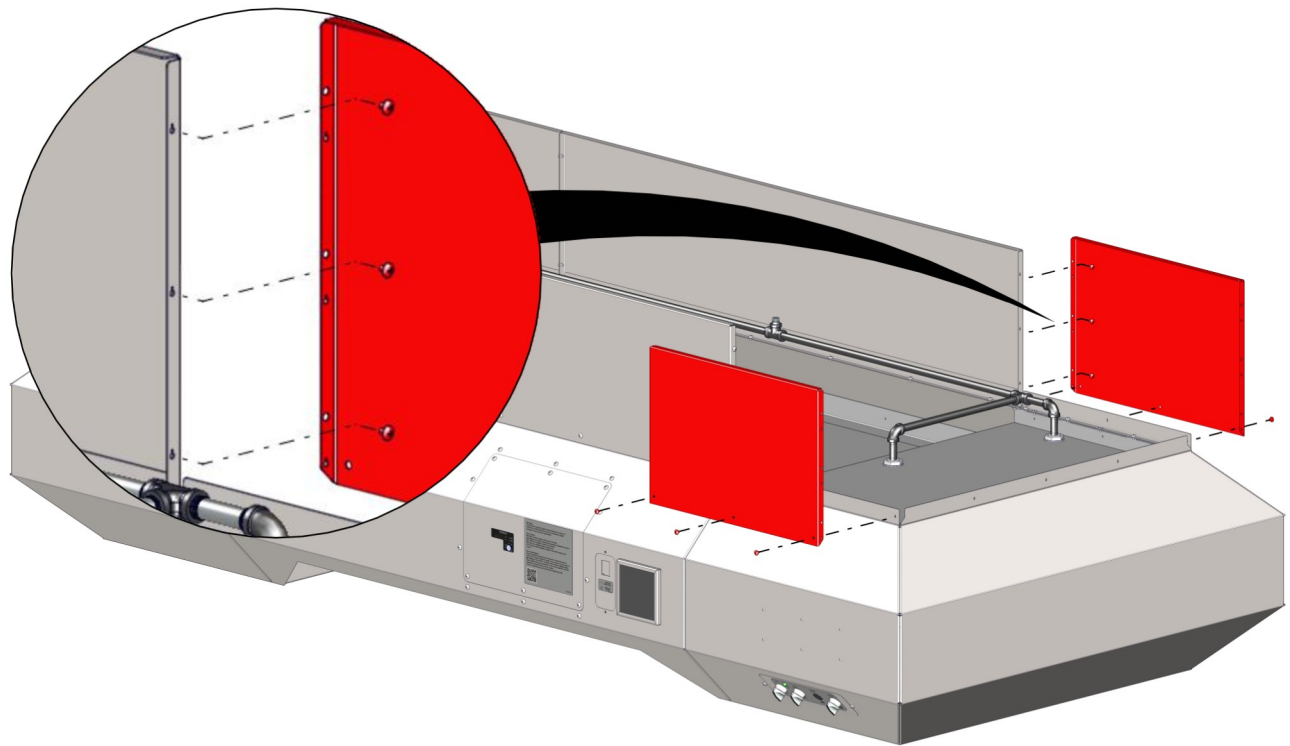

Install End Panels

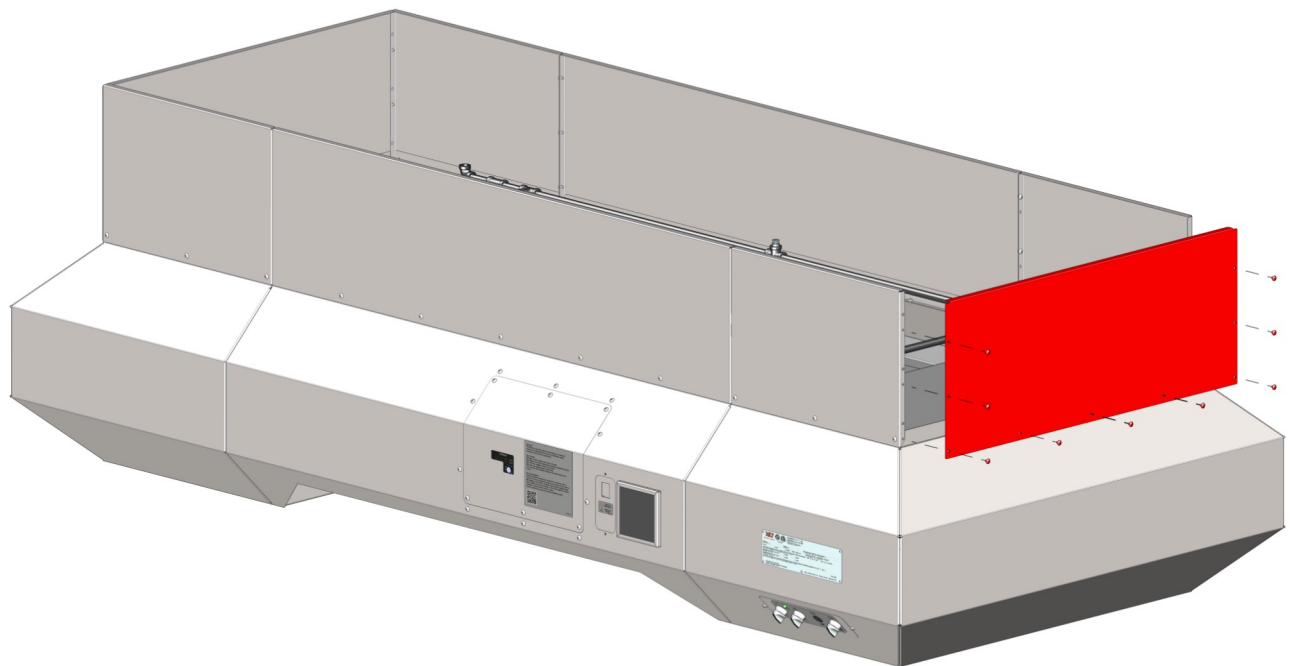

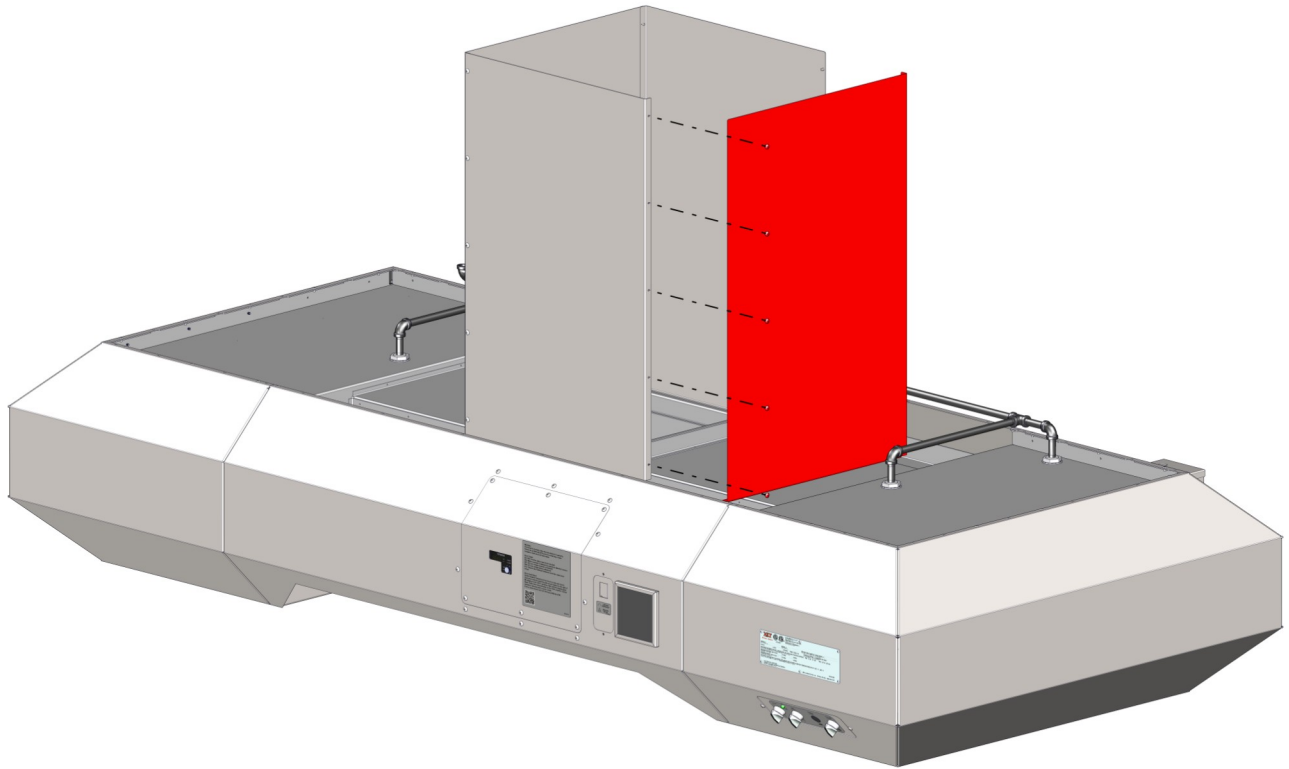

Your AVI hood is constructed of stainless and aluminized steel. Check application restrictions on product label prior to usage. Observe recommended precautionary and safety measures as dictated by the product manufacturer.

Do not use abrasive or caustic cleaners. Abrasive pads will scratch stainless steel surfaces. Areas with heavy buildup should be sprayed and allowed to soak for up to 5 minutes prior to wiping clean. Always wipe with the “grain” of the surface to maintain appearance.

Hood Cleaning & Maintenance Schedule						
	Daily	Weekly	Monthly	Semi-Annual	As Required	
Cleaning						
Wipe down Front, Sides, & Top	<input type="checkbox"/>					
Clean Light Globes	<input type="checkbox"/>					
Empty & Clean Grease Trays	<input type="checkbox"/>					<input type="checkbox"/>
Clean Grease Filters		<input type="checkbox"/>				<input type="checkbox"/>
Clean Duct and Exhaust Fan			<input type="checkbox"/>			<input type="checkbox"/>
Inspection						
Check Indicator Lamp	<input type="checkbox"/>					
Check Grease Trays	<input type="checkbox"/>					
Check Grease Filters		<input type="checkbox"/>				
Adjust						
No Adjustments Necessary						
Lubricate						
No Lubrication Required						
Replace						
Light Bulbs						<input type="checkbox"/>

Schedule provided as a guide only. Frequency of cleaning may vary as needed.

Oven must be cool and the electric cord unplugged before any cleaning is done.

DANGER

Shroud Panels can weigh up to 60 lbs [27 kg]. Use caution when lifting.

CAUTION

DO NOT spray liquid cleaning agents in the slots & holes of the following locations:

- Hood electrical box (located on back of upper portion)
- VFD Controller
- Back of control box
- Underneath control box

CAUTION

Refer to the Hood Installation Section for disassembly and reassembly.

Before troubleshooting the hood:

1. Make sure that the RUN lamp and POWER lamp are lit.
2. Check to see that the breaker in the service panel is not tripped.
3. Check to see that the breaker on the hood electrical box is not tripped.
4. Make sure the Switch Relocation Cords (SRC) are properly installed to the oven(s).
5. Check to see that the grease filters are clean & installed properly.
6. Check to see if the exhaust fan is rotating in the correct rotation. (applies to new installations)

In the occurrence that the VFD controller has an ERROR Code displaying. Follow these steps to clear them.

Error Codes:

- E01-E04 Inverter output was short circuited
- E05 motor overload is detected by electronic thermal function.
- E07 DC bus voltage exceeds a threshold
- E09 DC bus voltage is below a threshold
- E14 Ground fault detected between controller output and motor.


Error Code Reset:

1. Check VFD display for error code and record it.
2. Turn the Circuit Breaker on the hood to the OFF position. Wait until the VFD display goes out.
3. Turn the Circuit Breaker on the hood to the ON position.
4. Normal operation resumes with no error codes.
5. If error codes return, contact XLT customer service.

If the corrective actions listed above do not correct the problem, then XLT has qualified customer service personnel that can provide assistance on any type of XLT Oven or AVI Hood problem you may experience. Customer Service is available at 888-443-2751 24/7/365, or visit www.xltovens.com.

For repairs or maintenance of the fire suppression system and components, contact the local Ansul dealer or XLT for assistance.

This page intentionally left blank.

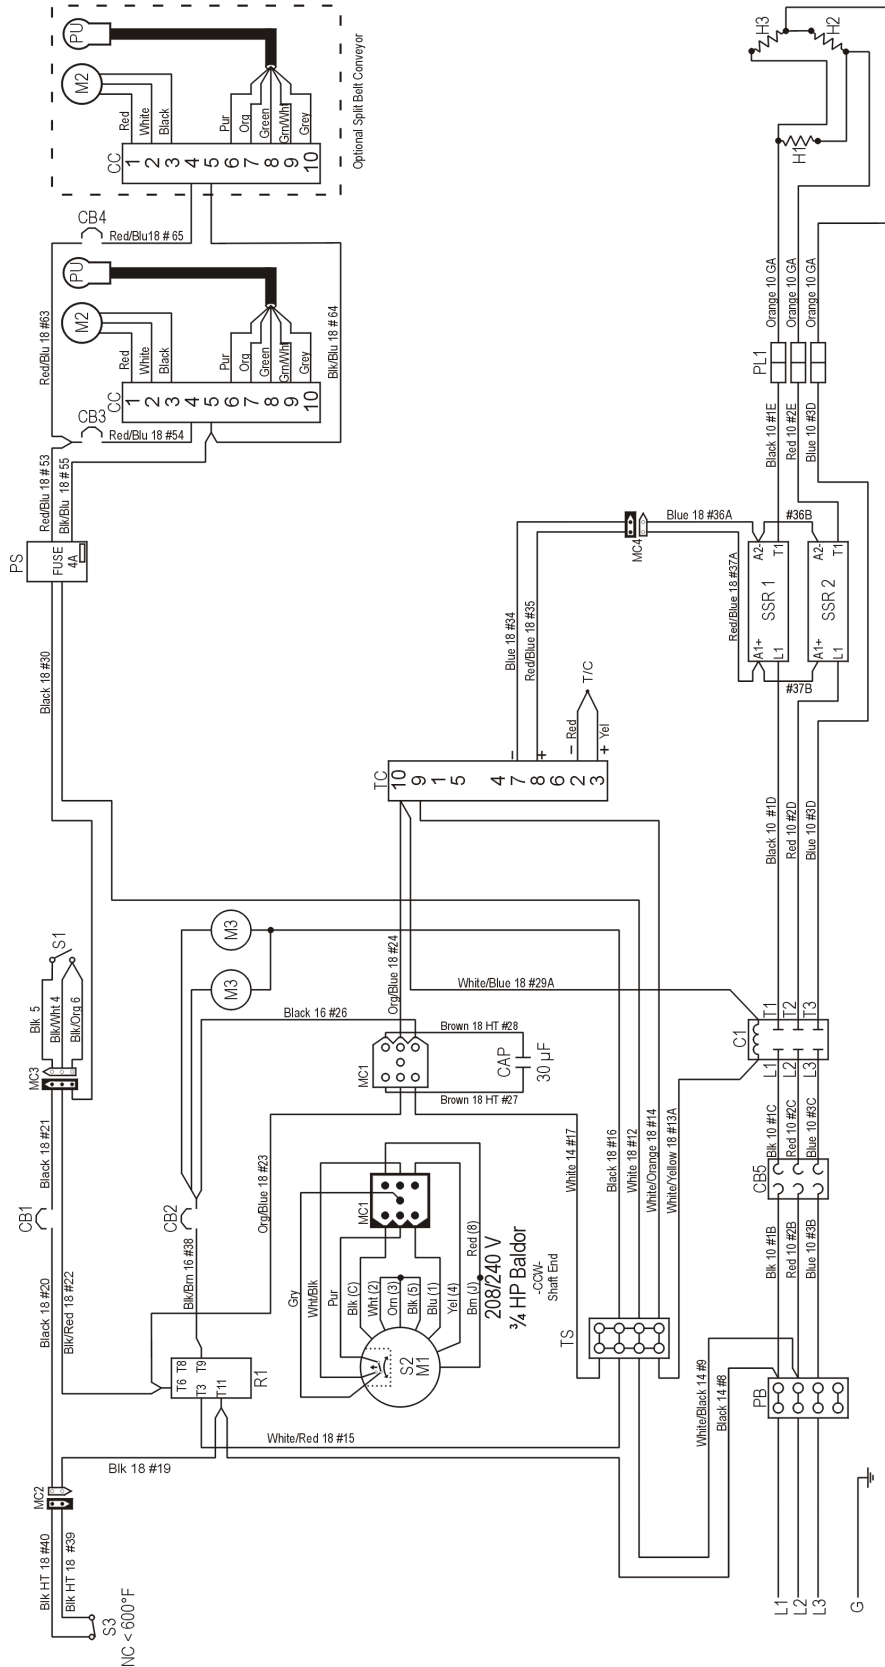


XLT-1832C-EL-S

- C1 - CONTACTOR, 50 AMP
- CAP - CAPACITOR, 30 uf
- CB1 - CIRCUIT BREAKER, 2 AMP
- CB2 - CIRCUIT BREAKER, 10 AMP
- CB3 - CIRCUIT BREAKER, 1 AMP
- CB4 - CIRCUIT BREAKER, 1 AMP
- CB5 - CIRCUIT BREAKER, 65 AMP
- CC - CONVEYOR CONTROL
- H1 - HEATING ELEMENT, 208 VAC OR 240 VAC, 5300 W
- H2 - HEATING ELEMENT, 208 VAC OR 240 VAC, 5300 W
- H3 - HEATING ELEMENT, 208 VAC OR 240 VAC, 5300 W
- M1 - MOTOR, OVEN FAN
- M2 - MOTOR, CONVEYOR
- M3 - MOTOR, COOLING FAN
- MC1 - MOLEX CONNECTOR 9 PIN, OVEN FAN
- MC2 - MOLEX CONNECTOR 2 PIN, HIGH LIMIT
- MC3 - MOLEX CONNECTOR 3 PIN, MAIN SWITCH
- MC4 - MOLEX CONNECTOR 2 PIN, SSR
- PB - POWER BLOCK
- PL1 - PUSH LOCK, 1-3 ELEMENTS
- PS - POWER SUPPLY 24 VDC
- PU - CONVEYOR MOTOR PICK-UP
- R1 - RELAY-COOL-DOWN TIMER
- S1 - SWITCH, MAIN
- S2 - SWITCH, CENTRIFUGAL
- S3 - SWITCH, HIGH-LIMIT
- SSR1 - SOLID STATE RELAY, 50 AMP
- SSR2 - SOLID STATE RELAY, 50 AMP
- T/C - THERMOCOUPLE
- TC - TEMPERATURE CONTROL
- TS - TERMINAL STRIP

208/240 VAC, 3 PH, 60 HZ
 XD-9130C-208/240-5300-3
 08/01/2012




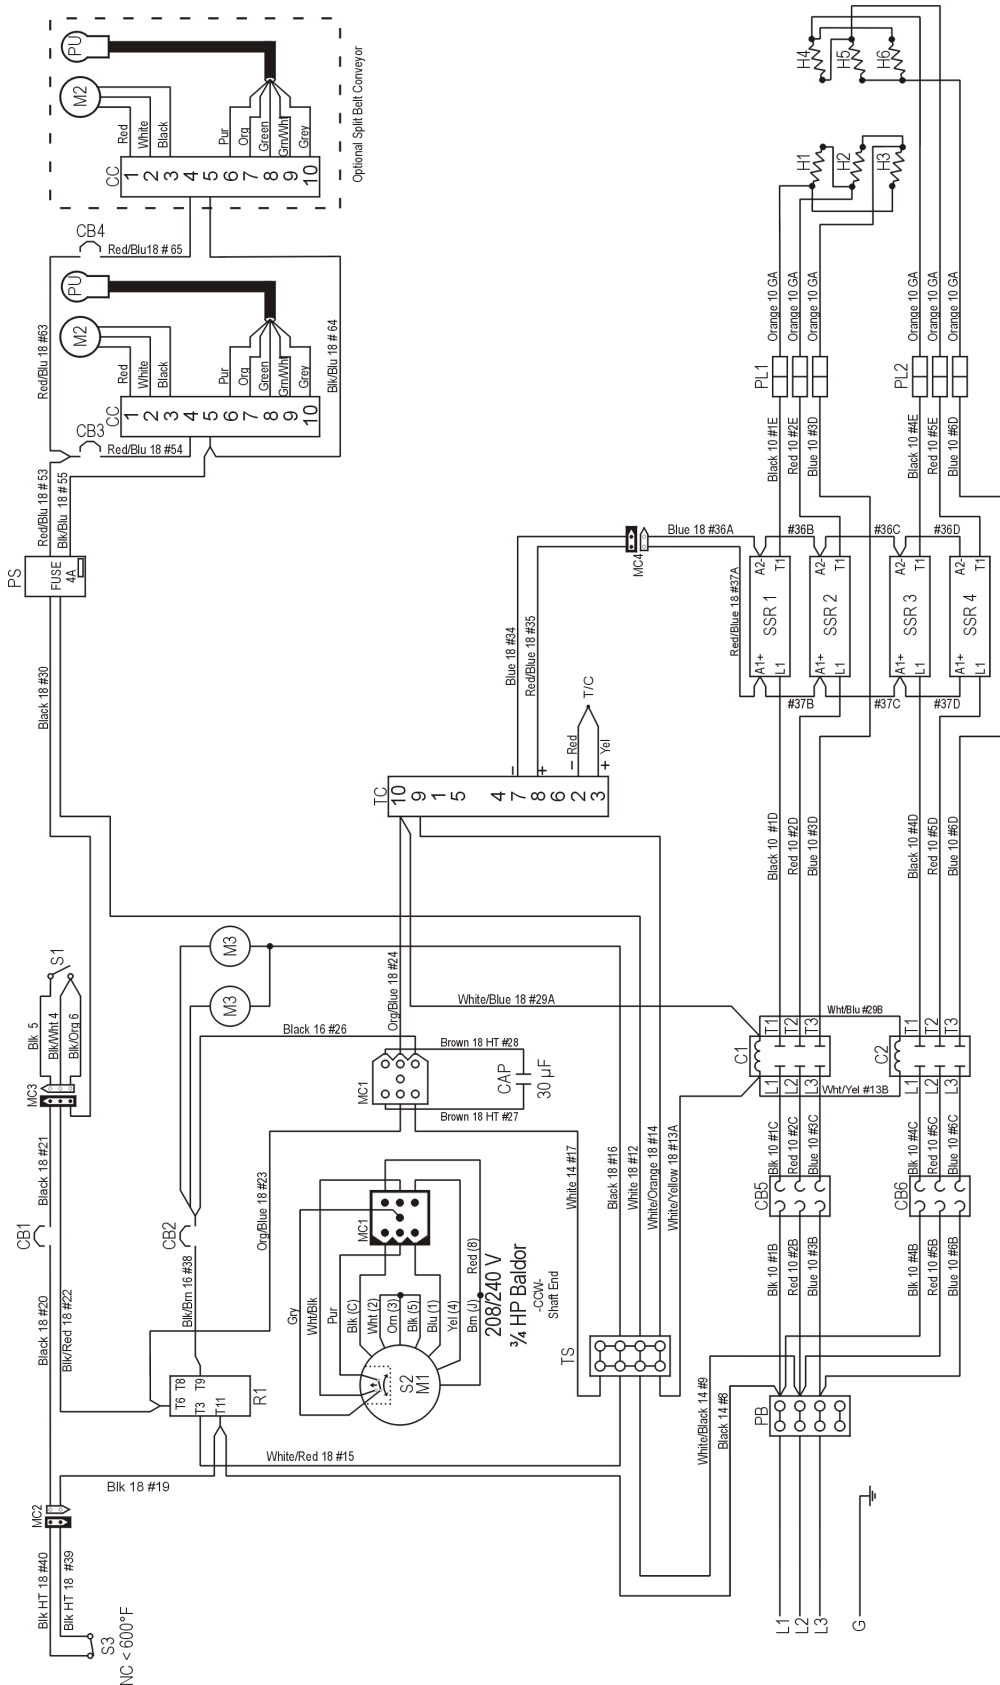

XLT-2440C-EL-S
XLT-3240C-EL-S

208/240 VAC 3 PH 60 Hz
XD-9130C-208/240-4500-6
08/01/2012


- C1 -CONTRACTOR, 50 AMP
- C2 -CONTRACTOR, 30 AMP
- CAP -CAPACITOR, 30 µf
- CB1 -CIRCUIT BREAKER, 2 AMP
- CB2 -CIRCUIT BREAKER, 10 AMP
- CB3 -CIRCUIT BREAKER, 1 AMP
- CB4 -CIRCUIT BREAKER, 1 AMP
- CB5 -CIRCUIT BREAKER, 63 AMP
- CB6 -CIRCUIT BREAKER, 63 AMP
- CC -CONVEYOR CONTROL
- H1 -HEATING ELEMENT, 208 VAC OR 240 VAC, 4500 W
- H2 -HEATING ELEMENT, 208 VAC OR 240 VAC, 4500 W
- H3 -HEATING ELEMENT, 208 VAC OR 240 VAC, 4500 W
- H4 -HEATING ELEMENT, 208 VAC OR 240 VAC, 4500 W
- H5 -HEATING ELEMENT, 208 VAC OR 240 VAC, 4500 W
- H6 -HEATING ELEMENT, 208 VAC OR 240 VAC, 4500 W
- M1 -MOTOR, OVEN FAN
- M2 -MOTOR, CONVEYOR
- M3 -MOTOR, COOLING FAN
- MC1 -MOLEX CONNECTOR 9 PIN, OVEN FAN
- MC2 -MOLEX CONNECTOR 2 PIN, HIGH LIMIT
- MC3 -MOLEX CONNECTOR 3 PIN, MAIN SWITCH
- MC4 -MOLEX CONNECTOR 2 PIN, SSR
- PB -POWER BLOCK
- PL1 -PUSH LOCK, 1-3 ELEMENTS
- PL2 -PUSH LOCK, 4-6 ELEMENTS
- PS -POWER SUPPLY 24 VDC
- PU -CONVEYOR MOTOR PICK-UP
- R1 -RELAY-COOL-DOWN TIMER
- S1 -SWITCH, MAIN
- S2 -SWITCH, CENTRIFUGAL
- S3 -SWITCH, HIGH-LIMIT
- SSR1 -SOLID STATE RELAY, 50 AMP
- SSR2 -SOLID STATE RELAY, 50 AMP
- SSR3 -SOLID STATE RELAY, 50 AMP
- SSR4 -SOLID STATE RELAY, 50 AMP
- T/C -THERMOCOUPLE
- TS -TEMPERATURE CONTROL
- TC -TERMINAL STRIP

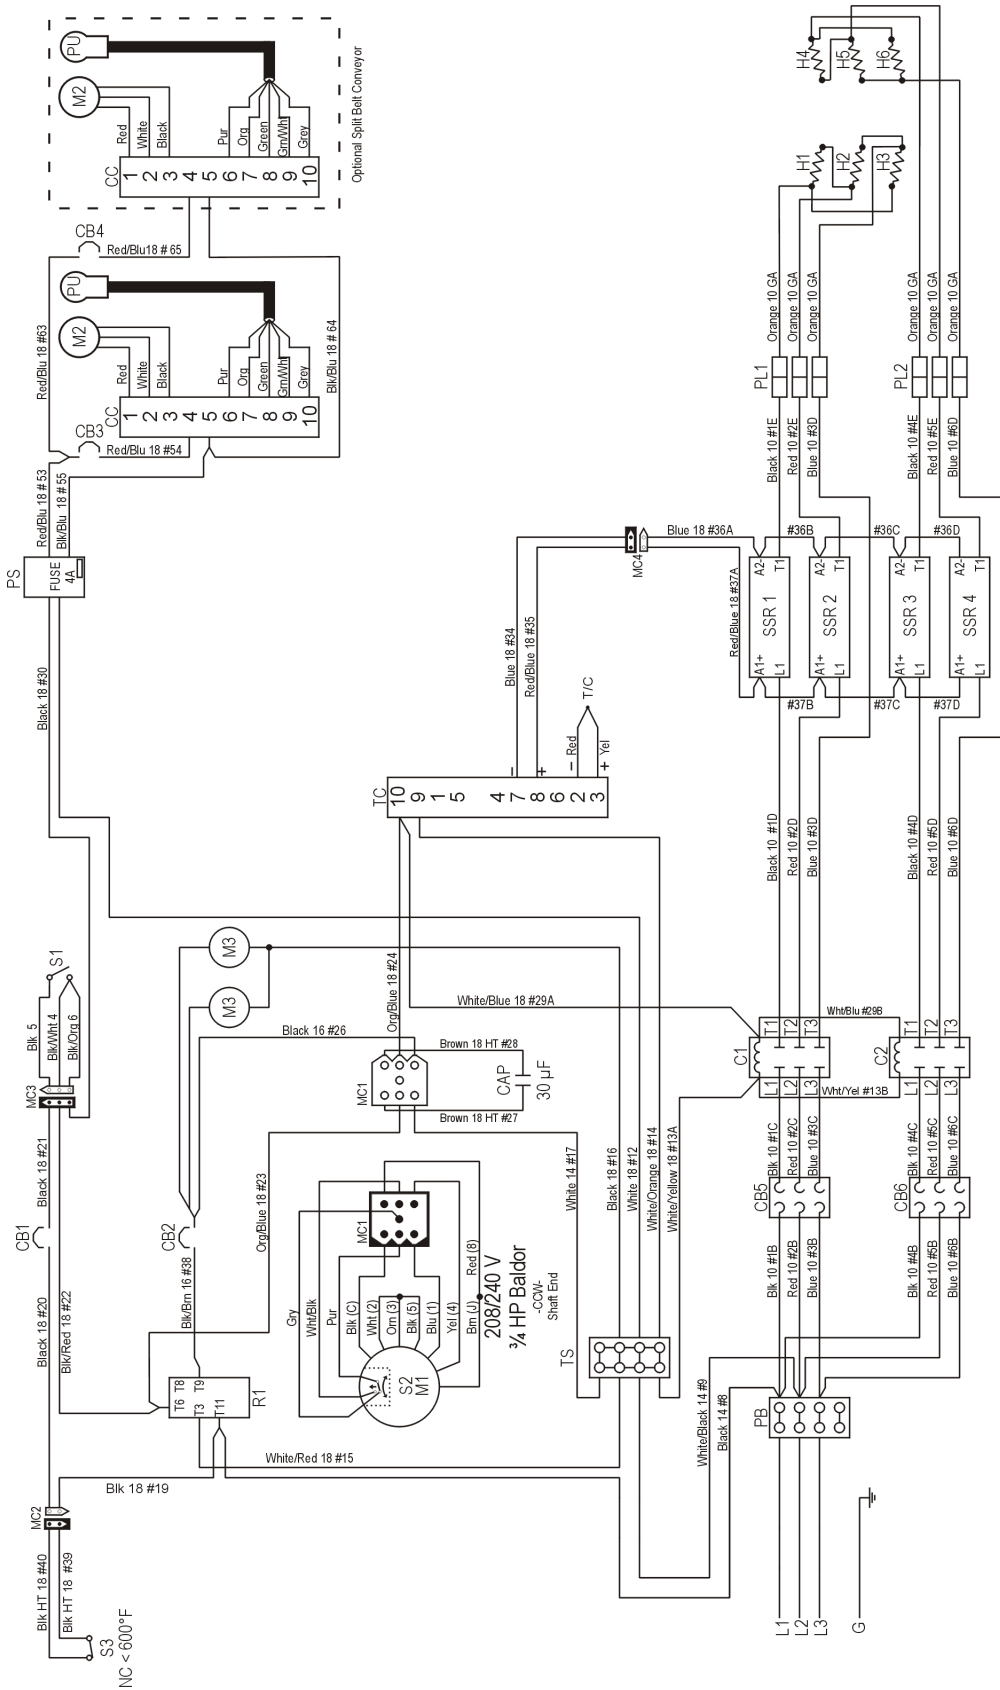

XLT-1855C-EL-S
XLT-3255C-EL-S
XLT-3855C-EL-S

208/240 VAC 3 PH 60 HZ
 XD-9130C-208/240-5300-6
 08/01/2012

- C1 - CONTACTOR, 50 AMP
- C2 - CONTACTOR, 50 AMP
- CAP - CAPACITOR, 30 µf
- CB1 - CIRCUIT BREAKER, 2 AMP
- CB2 - CIRCUIT BREAKER, 10 AMP
- CB3 - CIRCUIT BREAKER, 1 AMP
- CB4 - CIRCUIT BREAKER, 1 AMP
- CB5 - CIRCUIT BREAKER, 63 AMP
- CB6 - CIRCUIT BREAKER, 63 AMP
- CC - CONVEYOR CONTROL
- H1 - HEATING ELEMENT, 208 VAC OR 240 VAC, 5300 W
- H2 - HEATING ELEMENT, 208 VAC OR 240 VAC, 5300 W
- H3 - HEATING ELEMENT, 208 VAC OR 240 VAC, 5300 W
- H4 - HEATING ELEMENT, 208 VAC OR 240 VAC, 5300 W
- H5 - HEATING ELEMENT, 208 VAC OR 240 VAC, 5300 W
- H6 - HEATING ELEMENT, 208 VAC OR 240 VAC, 5300 W
- M1 - MOTOR, OVEN FAN
- M2 - MOTOR, CONVEYOR
- M3 - MOTOR, COOLING FAN
- MC1 - MOLEX CONNECTOR 9 PIN, OVEN FAN
- MC2 - CONTACTOR 2 PIN, HIGH LIMIT
- MC3 - MOLEX CONNECTOR 3 PIN, MAIN SWITCH
- MC4 - MOLEX CONNECTOR 2 PIN, SSR
- PB - POWER BLOCK
- PL1 - PUSH LOCK, 1-3 ELEMENTS
- PL2 - PUSH LOCK, 4-6 ELEMENTS
- PS - POWER SUPPLY 24 VDC
- PU - CONVEYOR MOTOR PICK-UP
- R1 - RELAY-COOL-DOWN TIMER
- S1 - SWITCH, MAIN
- S2 - SWITCH, CENTRIFUGAL
- S3 - SWITCH, HIGH-LIMIT
- SSR1 - SOLID STATE RELAY, 50 AMP
- SSR2 - SOLID STATE RELAY, 50 AMP
- SSR3 - SOLID STATE RELAY, 50 AMP
- SSR4 - SOLID STATE RELAY, 50 AMP
- T/C - THERMOCOUPLE
- TS - TEMPERATURE CONTROL
- T1 - TERMINAL STRIP

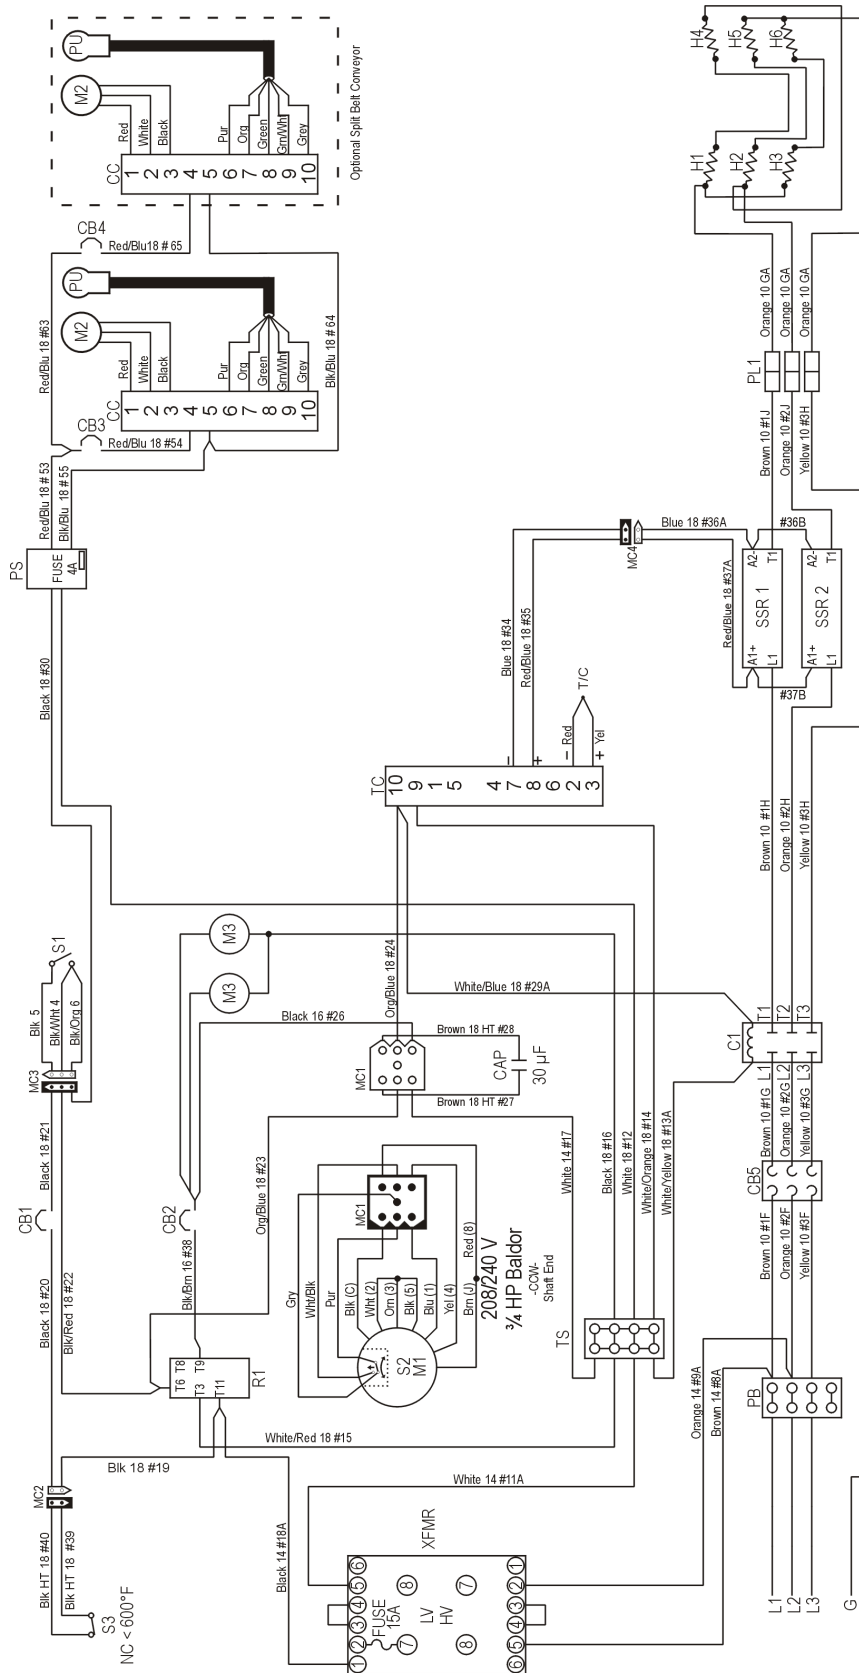

XLT-2440C-EL-S
XLT-3240C-EL-S


- S1 - SWITCH, MAIN
- S2 - SWITCH, CENTRIFUGAL
- S3 - SWITCH, HIGH-LIMIT
- SSR1 - SOLID STATE RELAY, 50 AMP
- SSR2 - SOLID STATE RELAY, 50 AMP
- T/C - THERMOCOUPLE
- TS - THERMAL SWITCH
- TS - THERMAL SWITCH CONTROL
- XFMR - TRANSFORMER, 240 VAC

- MC1 - MOLEX CONNECTOR 9 PIN, OVEN FAN
- MC2 - MOLEX CONNECTOR 2 PIN, HIGH LIMIT
- MC3 - MOLEX CONNECTOR 3 PIN, MAIN SWITCH
- MC4 - MOLEX CONNECTOR 2 PIN, SSR
- PB - POWER BLOCK
- PL1 - PUSH LOCK, 3 ELEMENTS
- PL2 - PUSH LOCK, 3 ELEMENTS
- PL3 - PUSH LOCK, 3 ELEMENTS
- PU - CONVEYER MOTOR PICKUP
- R1 - RELAY, COOL-DOWN TIMER

- H1 - HEATING ELEMENT, 240 VAC, 4500 W
- H2 - HEATING ELEMENT, 240 VAC, 4500 W
- H3 - HEATING ELEMENT, 240 VAC, 4500 W
- H4 - HEATING ELEMENT, 240 VAC, 4500 W
- H5 - HEATING ELEMENT, 240 VAC, 4500 W
- H6 - HEATING ELEMENT, 240 VAC, 4500 W
- M1 - MOTOR, REVERSE
- M2 - MOTOR, COOL-DOWN
- M3 - MOTOR, COOLING FAN

- C1 - CONTACTOR, 50 AMP
- CAP - CAPACITOR, 30 uF
- CB1 - CIRCUIT BREAKER, 2 AMP
- CB2 - CIRCUIT BREAKER, 10 AMP
- CB3 - CIRCUIT BREAKER, 1 AMP
- CB4 - CIRCUIT BREAKER, 1 AMP
- CB5 - CIRCUIT BREAKER, 65 AMP
- CC - CONVEYOR CONTROL

480 VAC 3 PH 60 Hz
XD-9130C-480-4500-6
08/01/2012

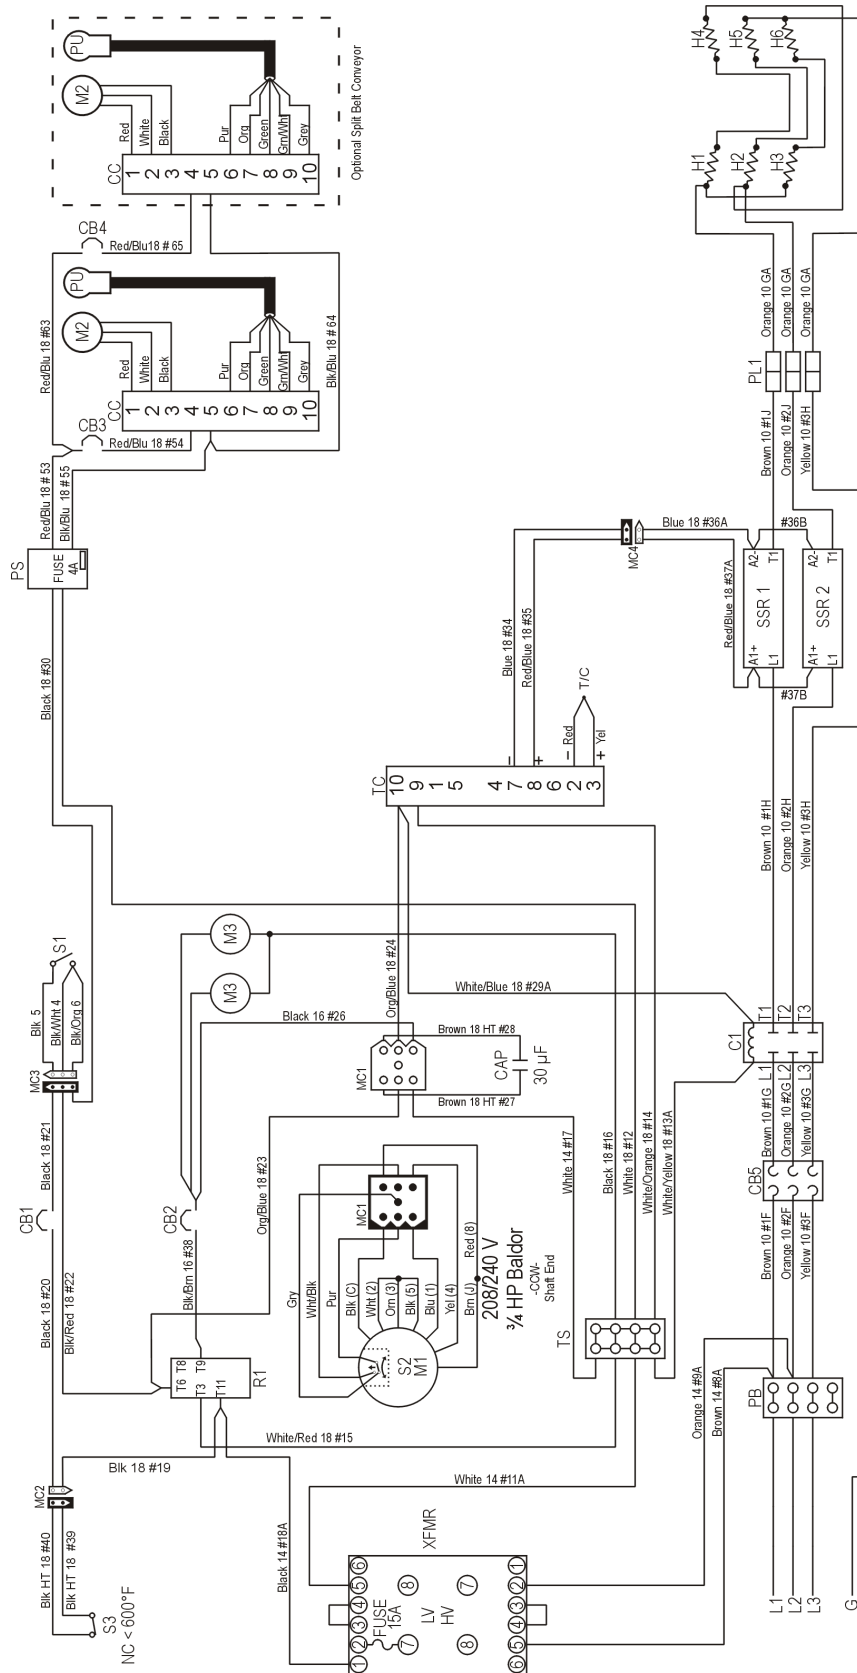

XLT-1855C-EL-S
XLT-3255C-EL-S
XLT-3855C-EL-S


480 VAC 3 PH 60 Hz
 XD-9130C-480-5300-6
 08/01/2012

- S1 - SWITCH, MAIN
- S2 - SWITCH, CENTRIFUGAL
- S3 - SWITCH, HIGH-LIMIT
- SSR1 - SOLID STATE RELAY, 50 AMP
- SSR2 - SOLID STATE RELAY, 50 AMP
- T/C - THERMOCOUPLE
- TS - THERMAL SWITCH
- TS - THERMAL SWITCH CONTROL
- XFMR - TRANSFORMER, 240 VAC

- MC1 - MOLEX CONNECTOR 9 PIN, OVEN FAN
- MC2 - MOLEX CONNECTOR 2 PIN, HIGH LIMIT
- MC3 - MOLEX CONNECTOR 3 PIN, MAIN SWITCH
- MC4 - MOLEX CONNECTOR 2 PIN, SSR
- PB - POWER BLOCK
- PL1 - PUSH LOCK, 3 ELEMENTS
- PL2 - PUSH LOCK, 3 ELEMENTS
- PL3 - PUSH LOCK, 3 ELEMENTS
- PU - CONVEYER MOTOR PICKUP
- R1 - RELAY, COOL-DOWN TIMER

- H1 - HEATING ELEMENT, 240 VAC, 5300 W
- H2 - HEATING ELEMENT, 240 VAC, 5300 W
- H3 - HEATING ELEMENT, 240 VAC, 5300 W
- H4 - HEATING ELEMENT, 240 VAC, 5300 W
- H5 - HEATING ELEMENT, 240 VAC, 5300 W
- H6 - HEATING ELEMENT, 240 VAC, 5300 W
- M1 - MOTOR, CONVEYER
- M2 - MOTOR, CONVEYER
- M3 - MOTOR, COOLING FAN

- C1 - CONTACTOR, 50 AMP
- CAP - CAPACITOR, 30 µf
- CB1 - CIRCUIT BREAKER, 2 AMP
- CB2 - CIRCUIT BREAKER, 10 AMP
- CB3 - CIRCUIT BREAKER, 1 AMP
- CB4 - CIRCUIT BREAKER, 1 AMP
- CB5 - CIRCUIT BREAKER, 65 AMP
- CC - CONVEYER CONTROL

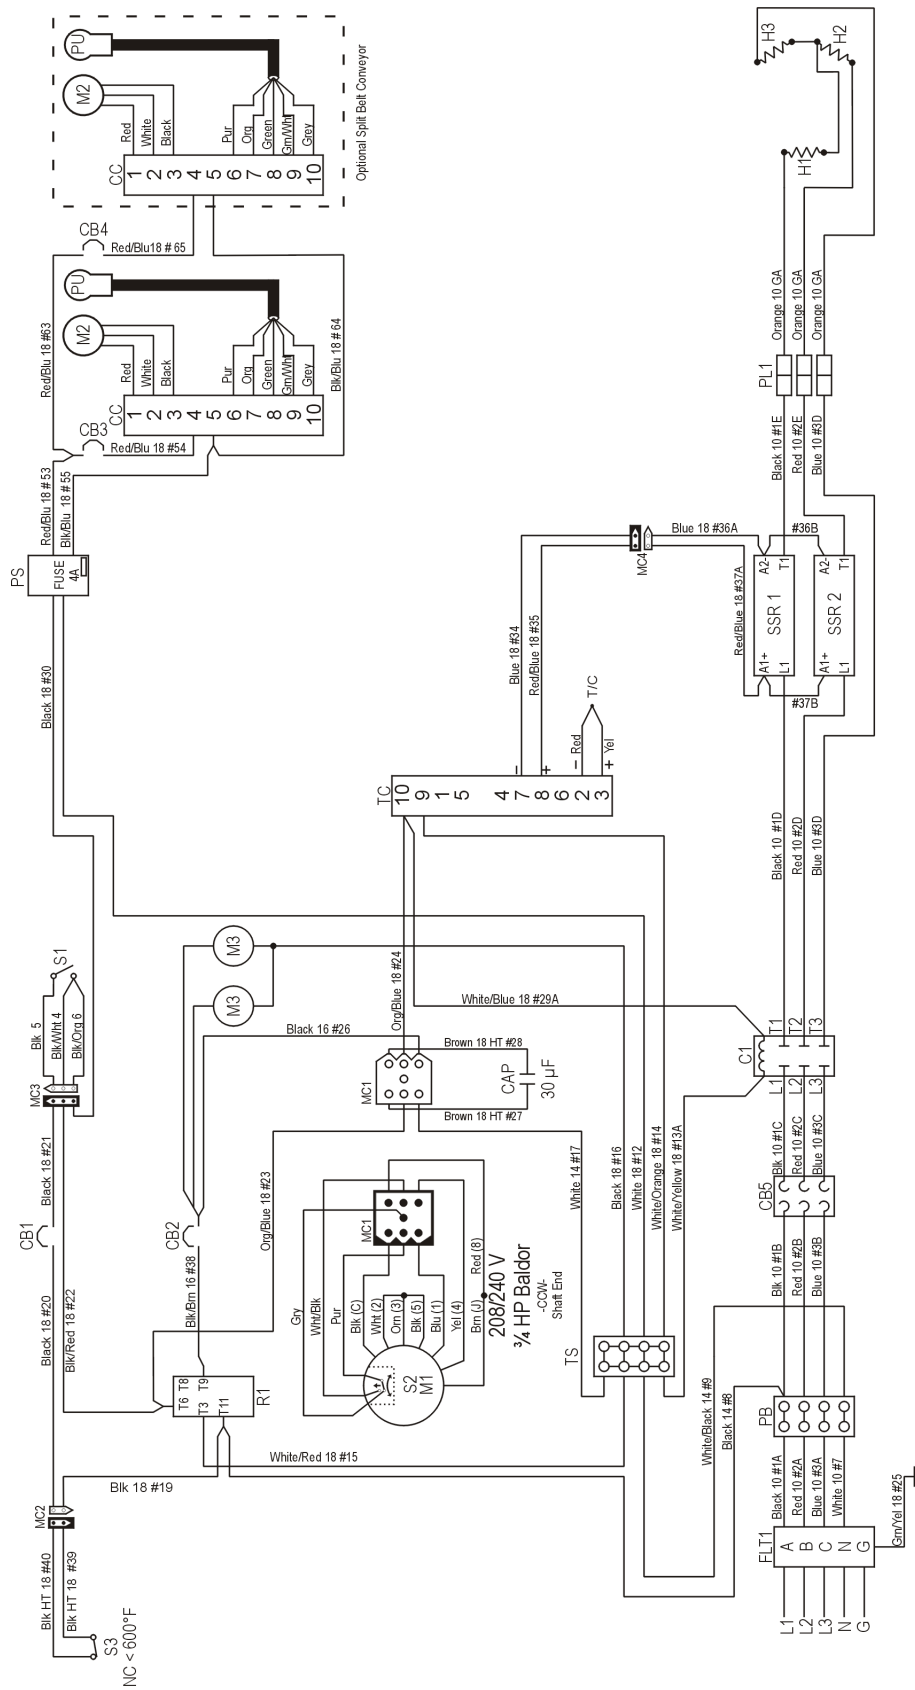


XLT-1832C-EL-W

- C1 -CAPACITOR, 30 AMP
- CAP -CAPACITOR, 30 uF
- CB1 -CIRCUIT BREAKER, 2 AMP
- CB2 -CIRCUIT BREAKER, 10 AMP
- CB3 -CIRCUIT BREAKER, 1 AMP
- CB4 -CIRCUIT BREAKER, 1 AMP
- CB5 -CIRCUIT BREAKER, 63 AMP
- CC -CONVEYOR CONTROL
- FLT1 -FILTER, LINE VOLTAGE
- FLT2 -FILTER, CONTROL VOLTAGE
- H1 -HEATING ELEMENT, 240 VAC, 5500 W
- H2 -HEATING ELEMENT, 240 VAC, 5500 W
- H3 -HEATING ELEMENT, 240 VAC, 5500 W
- M1 -MOTOR, OVEN FAN
- M2 -MOTOR, CONVEYOR
- M3 -MOTOR, COOLING FAN
- MC1 -MOLEX CONNECTOR 9 PIN, MAIN MOTOR
- MC2 -MOLEX CONNECTOR 2 PIN, HIGH LIMIT
- MC3 -MOLEX CONNECTOR 3 PIN, OVEN FAN
- MC4 -MOLEX CONNECTOR 2 PIN, SSR
- PB -POWER BLOCK
- PL1 -PUSH LOCK, 1-3 ELEMENTS
- PS -POWER SUPPLY 24 VDC
- PU -CONVEYOR MOTOR PICK-UP
- R1 -RELAY, COOL-DOWN TIMER
- S1 -SWITCH, MAIN
- S2 -SWITCH, CENTRIFUGAL
- S3 -SWITCH, HIGH-LIMIT
- SSR1 -SOLID STATE RELAY, 30 AMP
- SSR2 -SOLID STATE RELAY, 30 AMP
- TIC -THERMOCOUPLE
- TC -TEMPERATURE CONTROL
- TS -TERMINAL STRIP

380 VAC 3 PH 50/60 HZ
 XD-9130C-380-5300-3
 08/01/2012



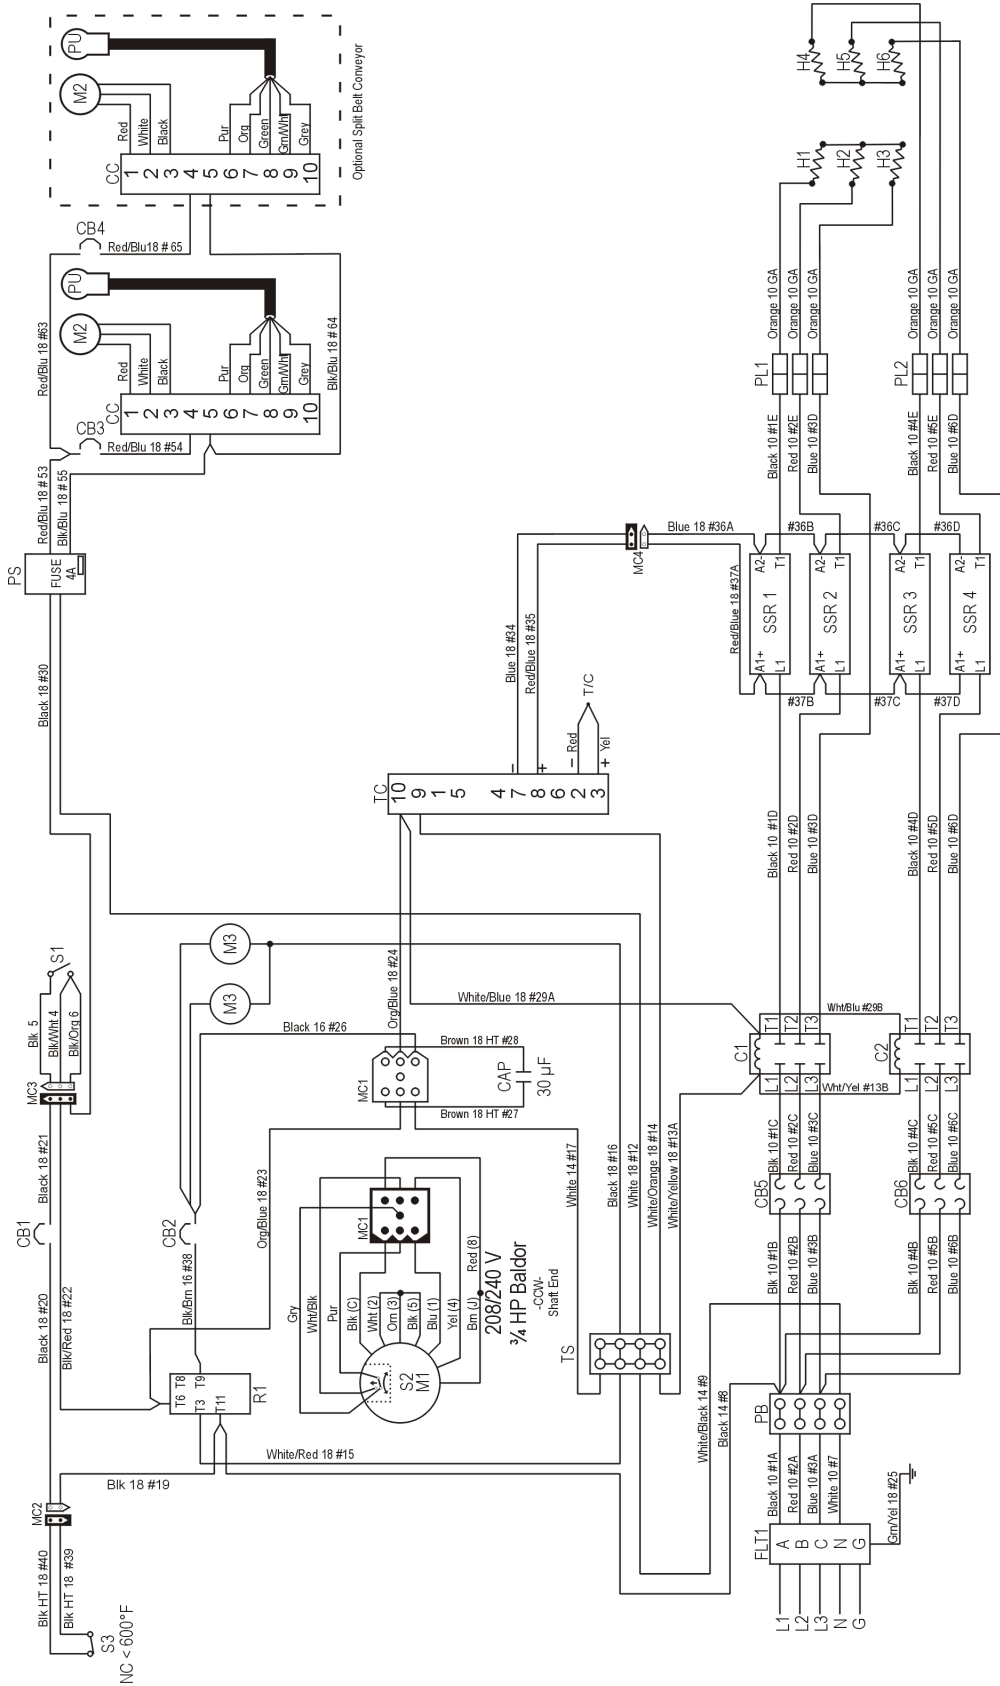


XLT-2440C-EL-W
XLT-3240C-EL-W

380 VAC 3 PH 50/60 Hz
 XD-9130C-380-4500-6
 08/01/2012

- C1 - CONTACTOR, 30 AMP
- C2 - CONTACTOR, 30 AMP
- CAP - CAPACITOR, 30 uf
- CB1 - CIRCUIT BREAKER, 2 AMP
- CB2 - CIRCUIT BREAKER, 10 AMP
- CB3 - CIRCUIT BREAKER, 1 AMP
- CB4 - CIRCUIT BREAKER, 1 AMP
- CB5 - CIRCUIT BREAKER, 65 AMP
- CB6 - CIRCUIT BREAKER, 65 AMP
- CC - CONVEYOR CONTROL
- FLT1 - FILTER, LINE VOLTAGE
- FLT2 - FILTER, CONTROL VOLTAGE
- H1 - HEATING ELEMENT, 240 VAC, 4500 W
- H2 - HEATING ELEMENT, 240 VAC, 4500 W
- H3 - HEATING ELEMENT, 240 VAC, 4500 W
- H4 - HEATING ELEMENT, 240 VAC, 4500 W
- H5 - HEATING ELEMENT, 240 VAC, 4500 W
- H6 - HEATING ELEMENT, 240 VAC, 4500 W
- M1 - MOTOR, OVEN FAN
- M2 - MOTOR, CONVEYOR
- M3 - MOTOR, COOLING FAN
- MC1 - MOLEX CONNECTOR 9 PIN, OVEN FAN
- MC2 - MOLEX CONNECTOR 2 PIN, HIGH LIMIT
- MC3 - MOLEX CONNECTOR 3 PIN, MAIN SWITCH
- MC4 - MOLEX CONNECTOR 2 PIN, SSR
- PB - POWER BLOCK
- PL1 - PUSH LOCK, 1-3 ELEMENTS
- PL2 - PUSH LOCK, 4-6 ELEMENTS
- PS - POWER SUPPLY 24V VDC
- PU - CONVEYOR MOTOR PICK-UP
- R1 - RELAY, COOL-DOWN TIMER
- S1 - SWITCH, MAIN
- S2 - SWITCH, CENTRIFUGAL
- S3 - SWITCH, HIGH-LIMIT
- SSR1 - SOLID STATE RELAY, 30 AMP
- SSR2 - SOLID STATE RELAY, 30 AMP
- SSR3 - SOLID STATE RELAY, 30 AMP
- SSR4 - SOLID STATE RELAY, 30 AMP
- T/C - THERMOCOUPLE
- TS - RELAY, COOL-DOWN TIMER
- T1 - TERMINAL STRIP



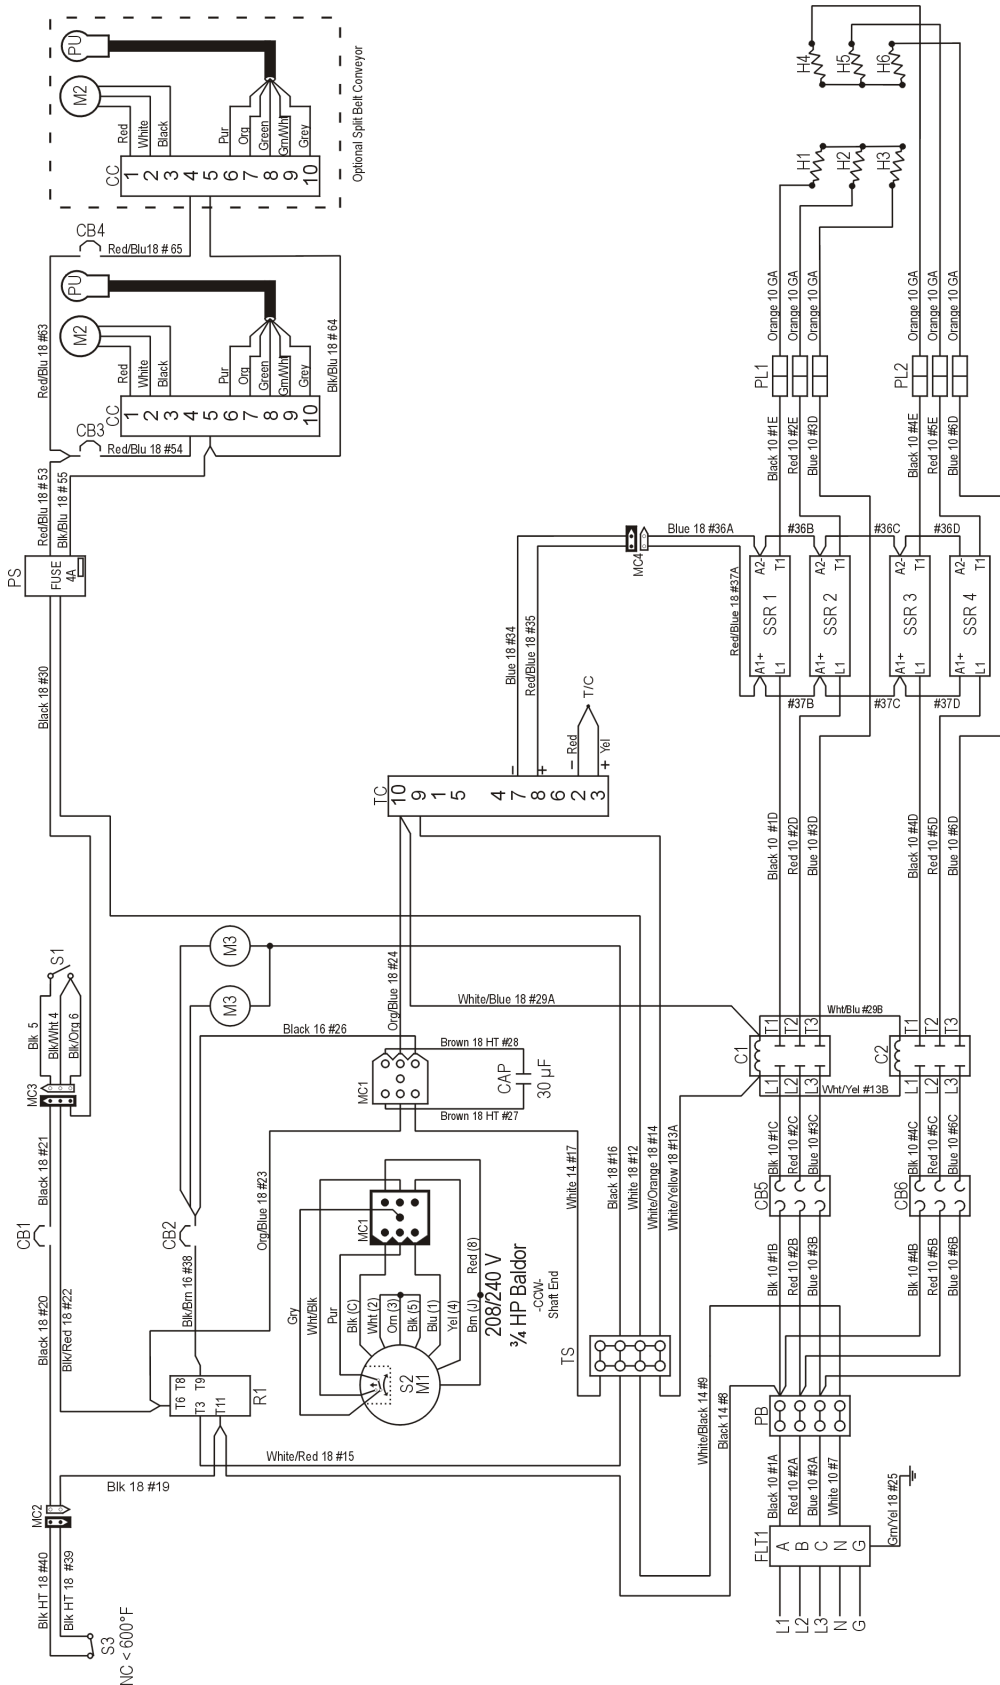



XLT-1855C-EL-W
XLT-3255C-EL-W
XLT-3855C-EL-W


380 VAC 3 PH 50/60 Hz
 XD-9130C-380-5300-6
 08/01/2012

- C1 -CONTRACTOR, 30 AMP
- C2 -CONTRACTOR, 30 AMP
- CAP -CAPACITOR, 30 uf
- CB1 -CIRCUIT BREAKER, 2 AMP
- CB2 -CIRCUIT BREAKER, 10 AMP
- CB3 -CIRCUIT BREAKER, 1 AMP
- CB4 -CIRCUIT BREAKER, 1 AMP
- CB5 -CIRCUIT BREAKER, 65 AMP
- CB6 -CIRCUIT BREAKER, 65 AMP
- CC -CONVEYOR CONTROL
- FLT1 -FILTER, LINE VOLTAGE
- FLT2 -FILTER, CONTROL VOLTAGE
- H1 -HEATING ELEMENT, 240 VAC, 5300 W
- H2 -HEATING ELEMENT, 240 VAC, 5300 W
- H3 -HEATING ELEMENT, 240 VAC, 5300 W
- H4 -HEATING ELEMENT, 240 VAC, 5300 W
- H5 -HEATING ELEMENT, 240 VAC, 5300 W
- H6 -HEATING ELEMENT, 240 VAC, 5300 W
- M1 -MOTOR, OVEN FAN
- M2 -MOTOR, CONVEYOR
- M3 -MOTOR, COOLING FAN
- MC1 -MOLEX CONNECTOR 9 PIN, OVEN FAN
- MC2 -MOLEX CONNECTOR 2 PIN, HIGH LIMIT
- MC3 -MOLEX CONNECTOR 3 PIN, MAIN SWITCH
- MC4 -MOLEX CONNECTOR 2 PIN, SSR
- PB -POWER BLOCK
- PL1 -PUSH LOCK, 1-3 ELEMENTS
- PL2 -PUSH LOCK, 4-6 ELEMENTS
- PS -POWER SUPPLY 24 VDC
- PU -CONVEYOR MOTOR PICK-UP
- R1 -RELAY, COOL-DOWN TIMER
- R2 -RELAY, COOL-DOWN TIMER
- R3 -RELAY, COOL-DOWN TIMER
- R4 -RELAY, COOL-DOWN TIMER
- S1 -SWITCH, MAIN
- S2 -SWITCH, CENTRIFUGAL
- S3 -SWITCH, HIGH-LIMIT
- SSR1 -SOLID STATE RELAY, 30 AMP
- SSR2 -SOLID STATE RELAY, 30 AMP
- SSR3 -SOLID STATE RELAY, 30 AMP
- SSR4 -SOLID STATE RELAY, 30 AMP
- T/C -THERMOCOUPLE
- T/S -TEMPERATURE CONTROL
- T1 -TERMINAL STRIP
- T2 -TERMINAL STRIP
- T3 -TERMINAL STRIP




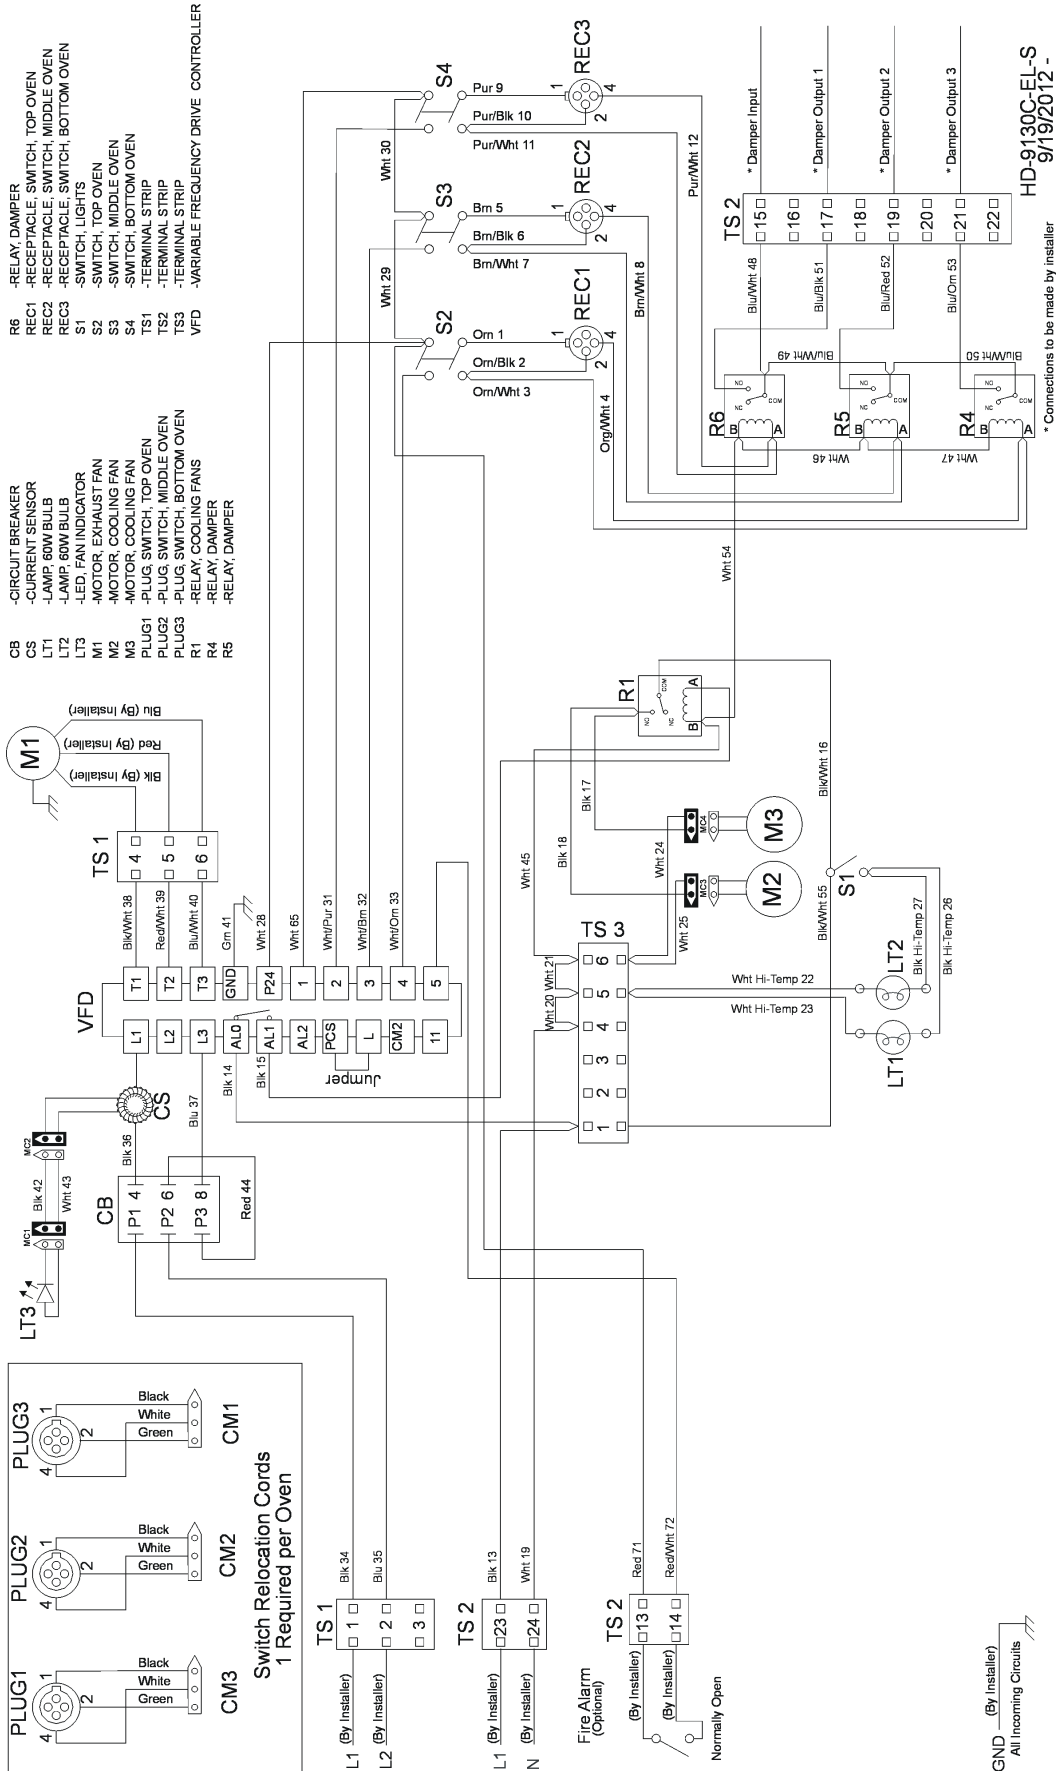

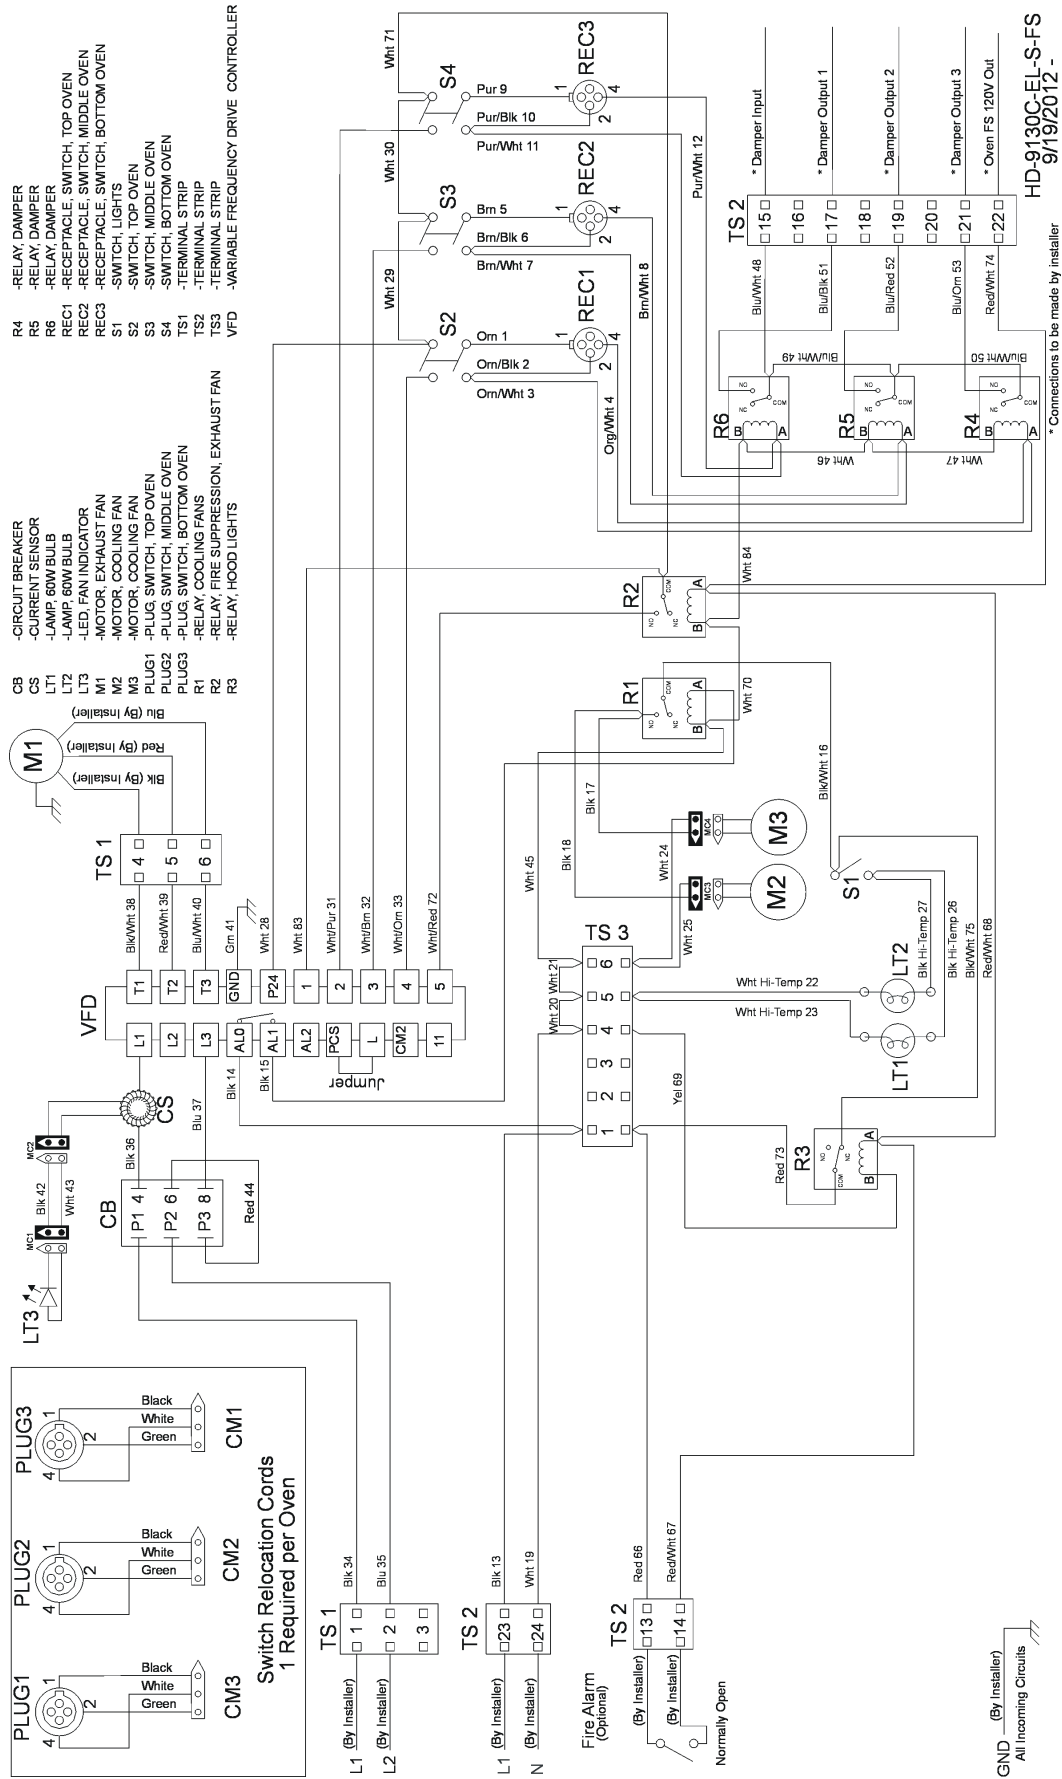

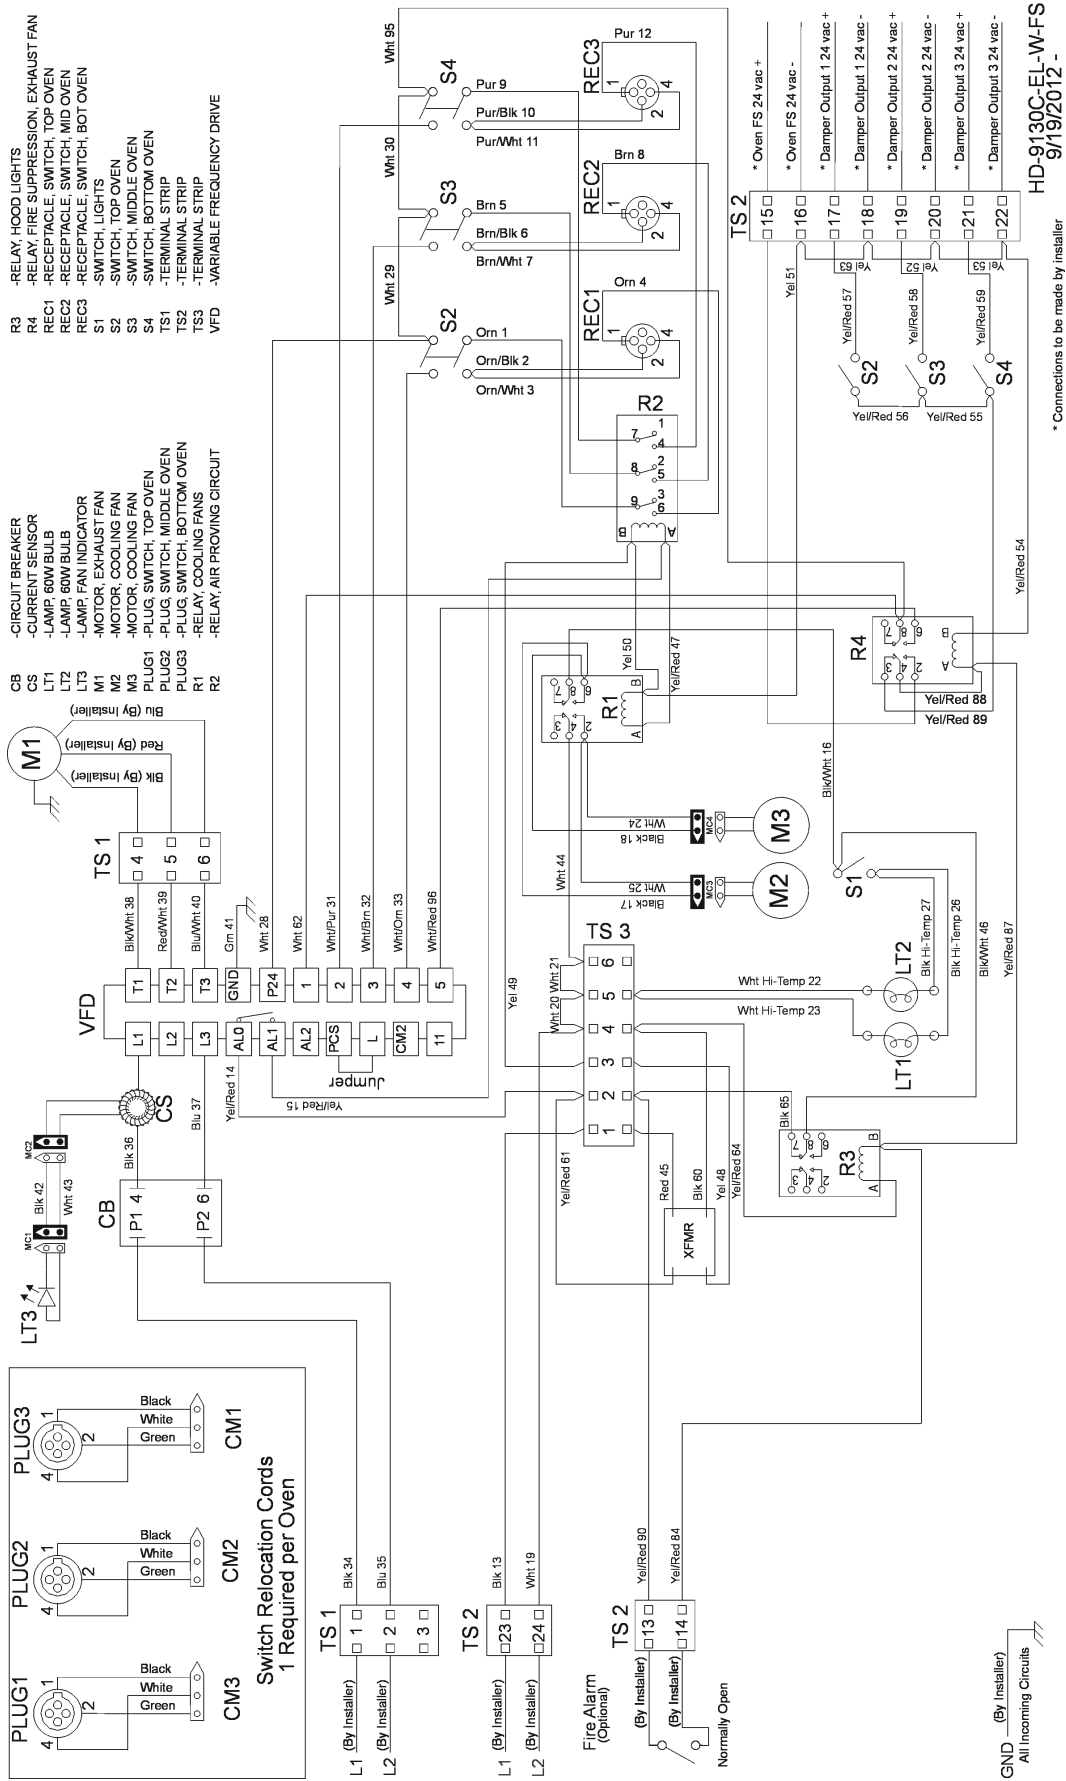

HD-9130C-EL-W-FS
9/19/2012 -
* Connections to be made by installer

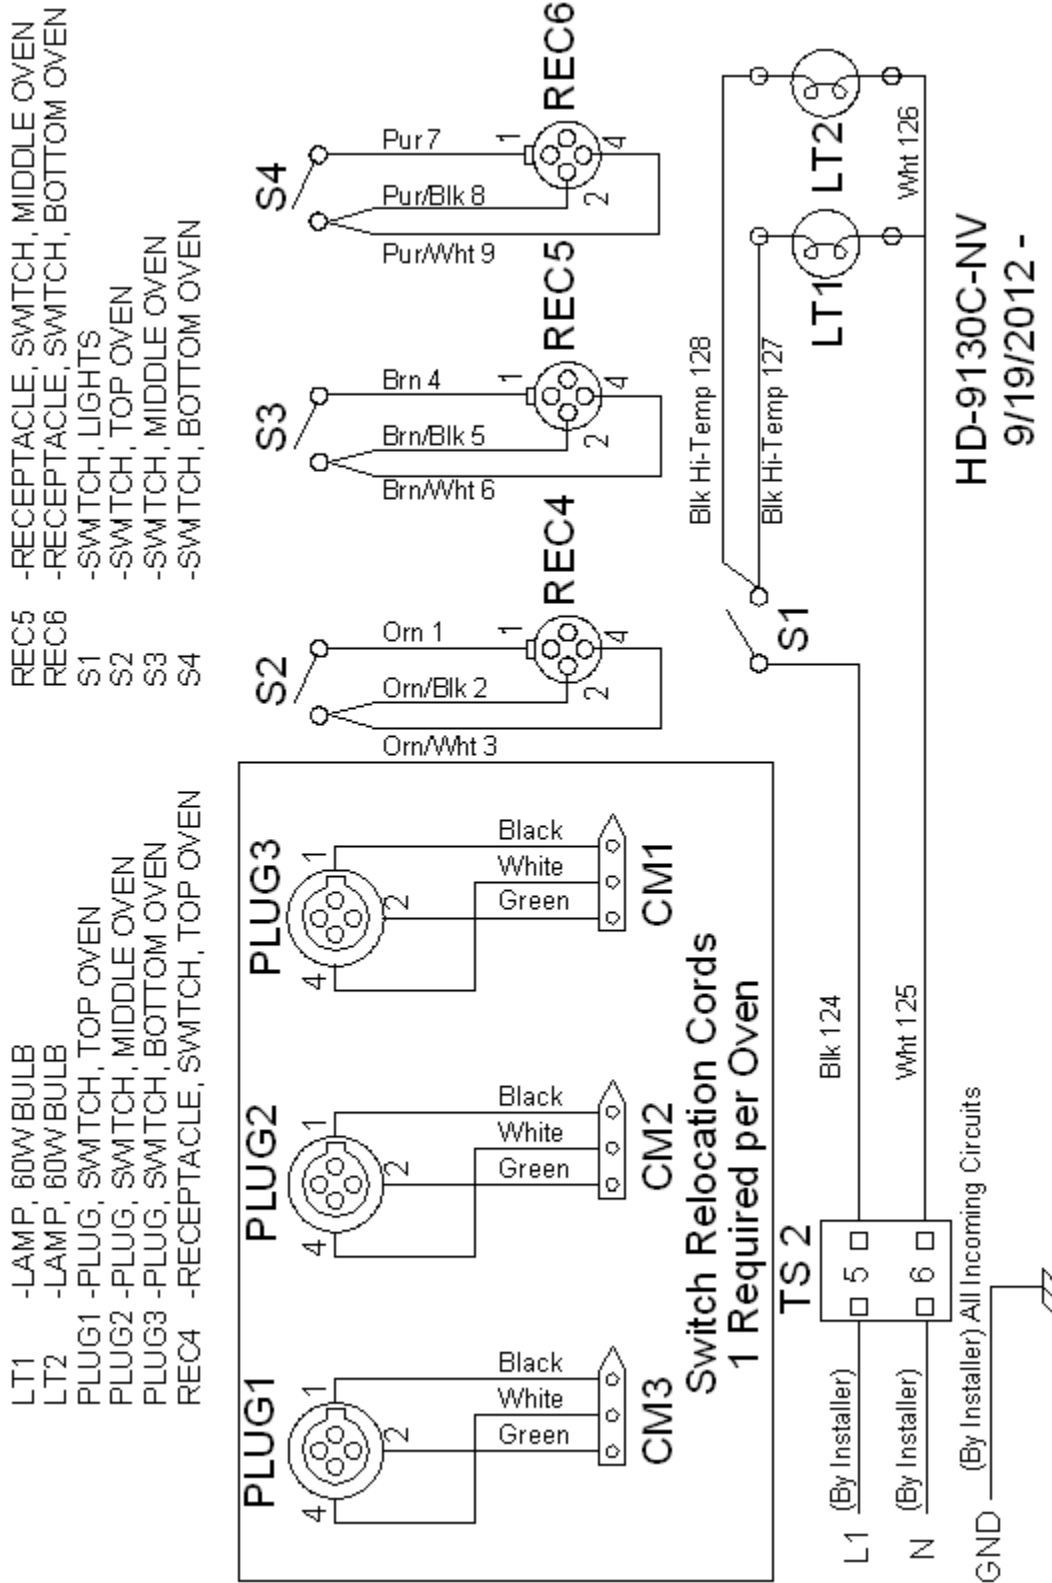

HD-9130C-NV
9/19/2012 -

Product Certifications and Applicable Codes

Standard XLT Oven Certifications ¹:**XLT Gas Ovens:**

1. ANSI Z8311-2006/CSA 1.8-2006 Standard for Gas Food Service Equipment
2. ANSI /NSF 4-2006e Sanitation for Commercial Cooking Rethermalization & Powered Hot Food Holding & Transportation Equipment

XLT Electric Ovens:

1. ANSI/UL197-CSA C22.2 Commercial Electric Appliances
2. ANSI /NSF 4-2006e Sanitation for Commercial Cooking Rethermalization & Powered Hot Food Holding & Transportation Equipment

World XLT Oven Certifications¹ :**XLT Gas Ovens:**

1. EN 60335-2-42:2003 + A1:2008, used in conjunction with EN 60335-1:2002, Safety of Household Appliances and Similar Electrical Appliances
2. EN 60335 A11, A1:2004 + A12, A2:2006 + A1/C1:2007 + A13:2008 Low Voltage Directive (LVD)
3. EN 55014-1:2006 EN 61000-3-2:2006, EN 61000-3-3:1995 +A1:2001 +A2:2006, Electromagnetic Compatibility. (EMC)
4. EN 55014-2:1997 +A1:2001, Conducted Emissions, Surge Immunity
5. BS EN 203-1:2005+A1:2008, Standard for Safety of Gas Heated Catering Equipment
6. BS EN 203-2-1: 2005, Standard for Gas Heated Catering Equipment
7. 90/396/EEC. Gas Appliance Directive (GAD)

XLT Electric Ovens:

1. EN 60335-2-42:2003 Safety of Household Appliances and Similar Electrical Appliances
2. EN 60335-1:2002 +A11, A1:2004 + A12, A2:2006 + A1/C1:2007 + A13:2008) Low Voltage Directive (LVD)
3. EN 6100-6-5 Electromagnetic Compatibility (EMC)
4. EN 55014-2:1997 +A1:2001, Conducted Emissions, Surge Immunity
5. EN 6100-6-1 EMC Immunity for residential, commercial & light industrial

Product Certifications and Applicable Codes - Continued

6. EN 5504-1 EMC house hold appliance electric tools & similar appliances
7. EN 6100-3-3 +A1+A2 Voltage fluctuation

Standard & World AVI Hood Certifications ¹:

1. UL 710 Standard for Safety Exhaust Hoods for Commercial Cooking
2. ANSI/NSF 2-2009 Sanitation Food Equipment
3. ULC-S646, Standard for Exhaust Hoods and Related Controls for Commercial and Institutional Kitchens

Australian XLT Oven Certifications ²:**XLT Gas Ovens: (certificate 7373)**

1. AS 4563-2004 Commercial Catering Gas Equipment
2. AS/NZS 3350.1:2002 Safety of Household & Similar Electrical Appliances.

¹ The noted certifications for XLT ovens and AVI Hood are performed and documented by Intertek Testing Services NA Inc. 165 Main Street, Cortland, NY 13045. Intertek is a nationally and internationally certified testing and accreditation agency.

² The certifications for Australia are administered and verified by the Australian Gas Association 2 Park Way, PO Box 122, BRAESIDE, VIC 3195

Oven Initial Start-up Checklist - Remove & Return to XLT Ovens

3rd step: Place all control boxes in service position and document settings, remove blue tag from inside control box and connect switch to wire harness. Start each oven and complete form below.

<p><u>Top Oven</u> <input type="checkbox"/> N/A</p> <p>Model #: _____</p> <p>Serial #: _____</p> <p>Front Belt Speed: _____ min _____ sec</p> <p>Back Belt Speed: _____ min _____ sec <input type="checkbox"/> N/A</p>	<p>Proper Belt Tension: <input type="checkbox"/> Yes <input type="checkbox"/> No</p> <p>Conveyor Belt Direction: <input type="checkbox"/> L to R <input type="checkbox"/> R to L</p> <p>Set Point Temp: Left _____ Right _____</p> <p>Fingers in proper location: <input type="checkbox"/> Yes <input type="checkbox"/> No</p> <p>Fire Suppression Installed: <input type="checkbox"/> Yes <input type="checkbox"/> No</p>
<u>ELECTRIC OVENS ONLY</u>	
<p>Electrical Supply (per oven):</p> <p>_____ Volts _____ Amps _____ Hz _____ Phase</p>	
<p><u>Middle Oven</u> <input type="checkbox"/> N/A</p> <p>Model #: _____</p> <p>Serial #: _____</p> <p>Front Belt Speed: _____ min _____ sec</p> <p>Back Belt Speed: _____ min _____ sec <input type="checkbox"/> N/A</p>	<p>Proper Belt Tension: <input type="checkbox"/> Yes <input type="checkbox"/> No</p> <p>Conveyor Belt Direction: <input type="checkbox"/> L to R <input type="checkbox"/> R to L</p> <p>Set Point Temp: Left _____ Right _____</p> <p>Fingers in proper location: <input type="checkbox"/> Yes <input type="checkbox"/> No</p> <p>Fire Suppression Installed: <input type="checkbox"/> Yes <input type="checkbox"/> No</p>
<u>ELECTRIC OVENS ONLY</u>	
<p>Electrical Supply (per oven):</p> <p>_____ Volts _____ Amps _____ Hz _____ Phase</p>	
<p><u>Bottom Oven</u> <input type="checkbox"/> N/A</p> <p>Model #: _____</p> <p>Serial #: _____</p> <p>Front Belt Speed: _____ min _____ sec</p> <p>Back Belt Speed: _____ min _____ sec <input type="checkbox"/> N/A</p>	<p>Proper Belt Tension: <input type="checkbox"/> Yes <input type="checkbox"/> No</p> <p>Conveyor Belt Direction: <input type="checkbox"/> L to R <input type="checkbox"/> R to L</p> <p>Set Point Temp: Left _____ Right _____</p> <p>Fingers in proper location: <input type="checkbox"/> Yes <input type="checkbox"/> No</p> <p>Fire Suppression Installed: <input type="checkbox"/> Yes <input type="checkbox"/> No</p>
<u>ELECTRIC OVENS ONLY</u>	
<p>Electrical Supply (per oven):</p> <p>_____ Volts _____ Amps _____ Hz _____ Phase</p>	

Date: _____
Customer Signature: _____

<p>I&O Manual presented to store operator: <input type="checkbox"/> Yes <input type="checkbox"/> No</p> <p>Air-born contaminates: <input type="checkbox"/> Flour <input type="checkbox"/> Cornmeal <input type="checkbox"/> Grease Other _____</p> <p>On-Site dough prep: <input type="checkbox"/> Yes <input type="checkbox"/> No</p> <p><input type="checkbox"/> Thin Crust <input type="checkbox"/> Thick Crust <input type="checkbox"/> Pan <input type="checkbox"/> Screen</p> <p>Other Product: _____</p>	<p>Ovens ran for 30 min: <input type="checkbox"/> Yes <input type="checkbox"/> No</p> <p>Test cook performed: <input type="checkbox"/> Yes <input type="checkbox"/> No</p>
---	--

XLT Ovens
PO Box 9090
Wichita, Kansas 67277

US: 888-443-2751 FAX: 316-943-2769 INTL: 316-943-2751 WEB: www.xltovens.com